

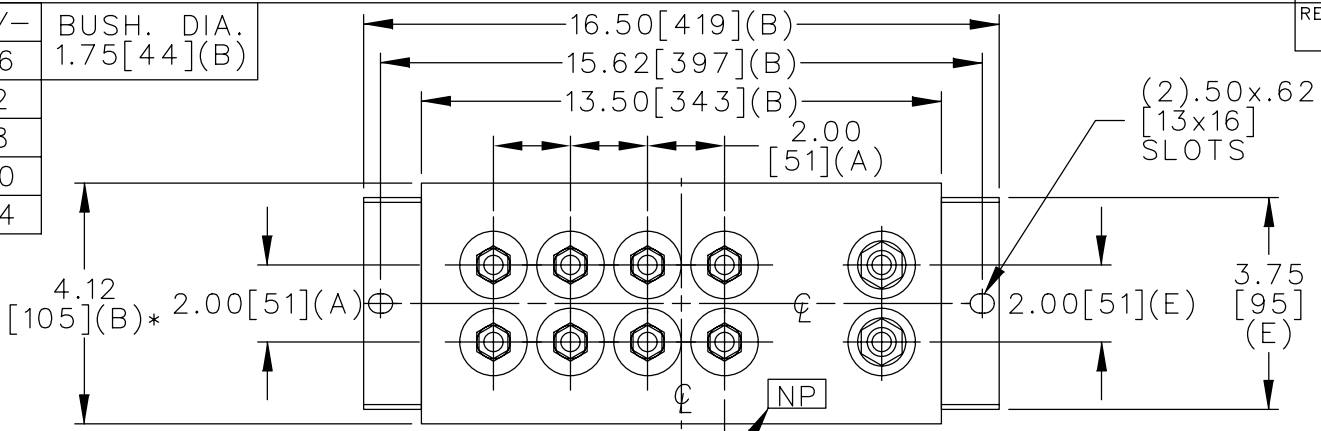


TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

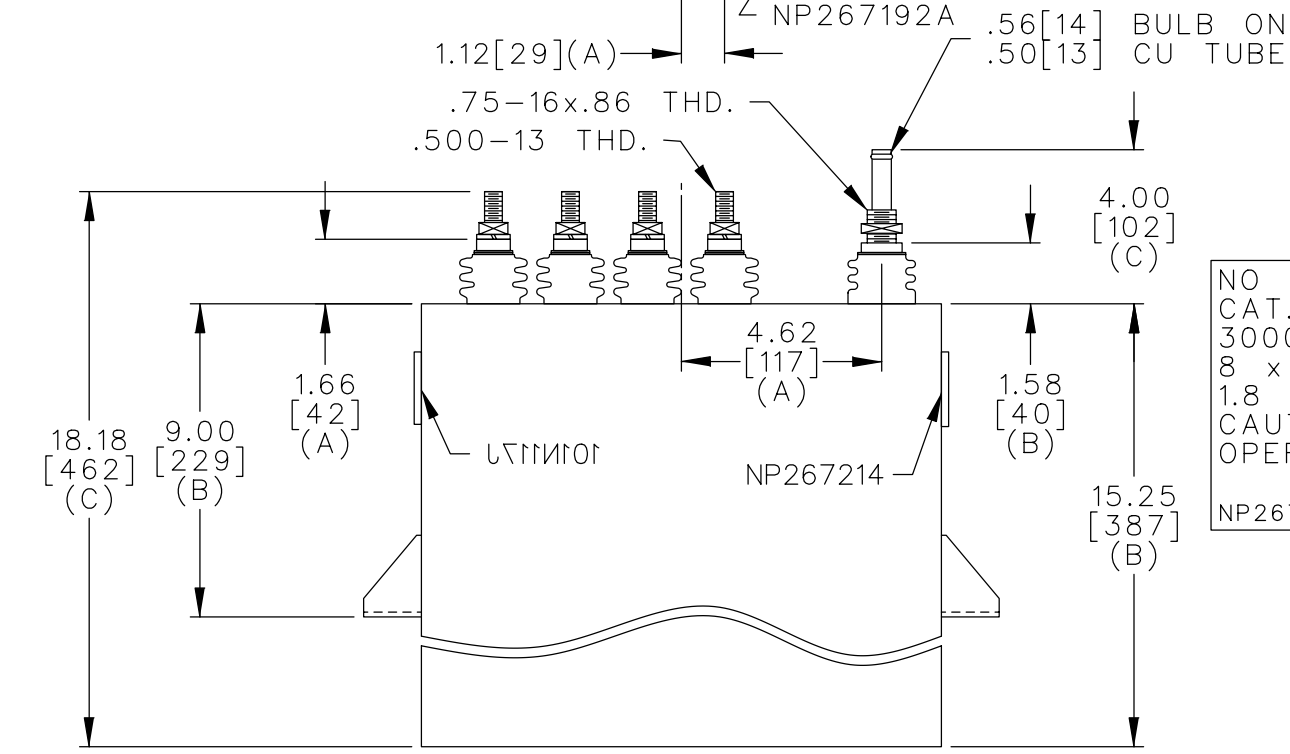

TERM	uF	kVAR
1	4.77	375
2	4.77	375
3	4.77	375
4	4.77	375
5	4.77	375
6	4.77	375
7	4.77	375
8	4.77	375

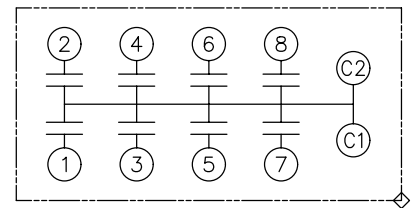

NO INTERNAL DISCH. RESISTORS
 CAT. 19L0335WH3 SN
 3000KVAR 1250V 8000HZ
 8 x 4.77 UF/TAP
 1.8 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE A	<p>OUTLINE 19L0335WH3</p>
	<p>DRAWN E.McGINN AUG. 6, 2001</p>	
<p>ISSUED</p>	<p>SCALE</p>	<p>DISTR TO</p>