



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

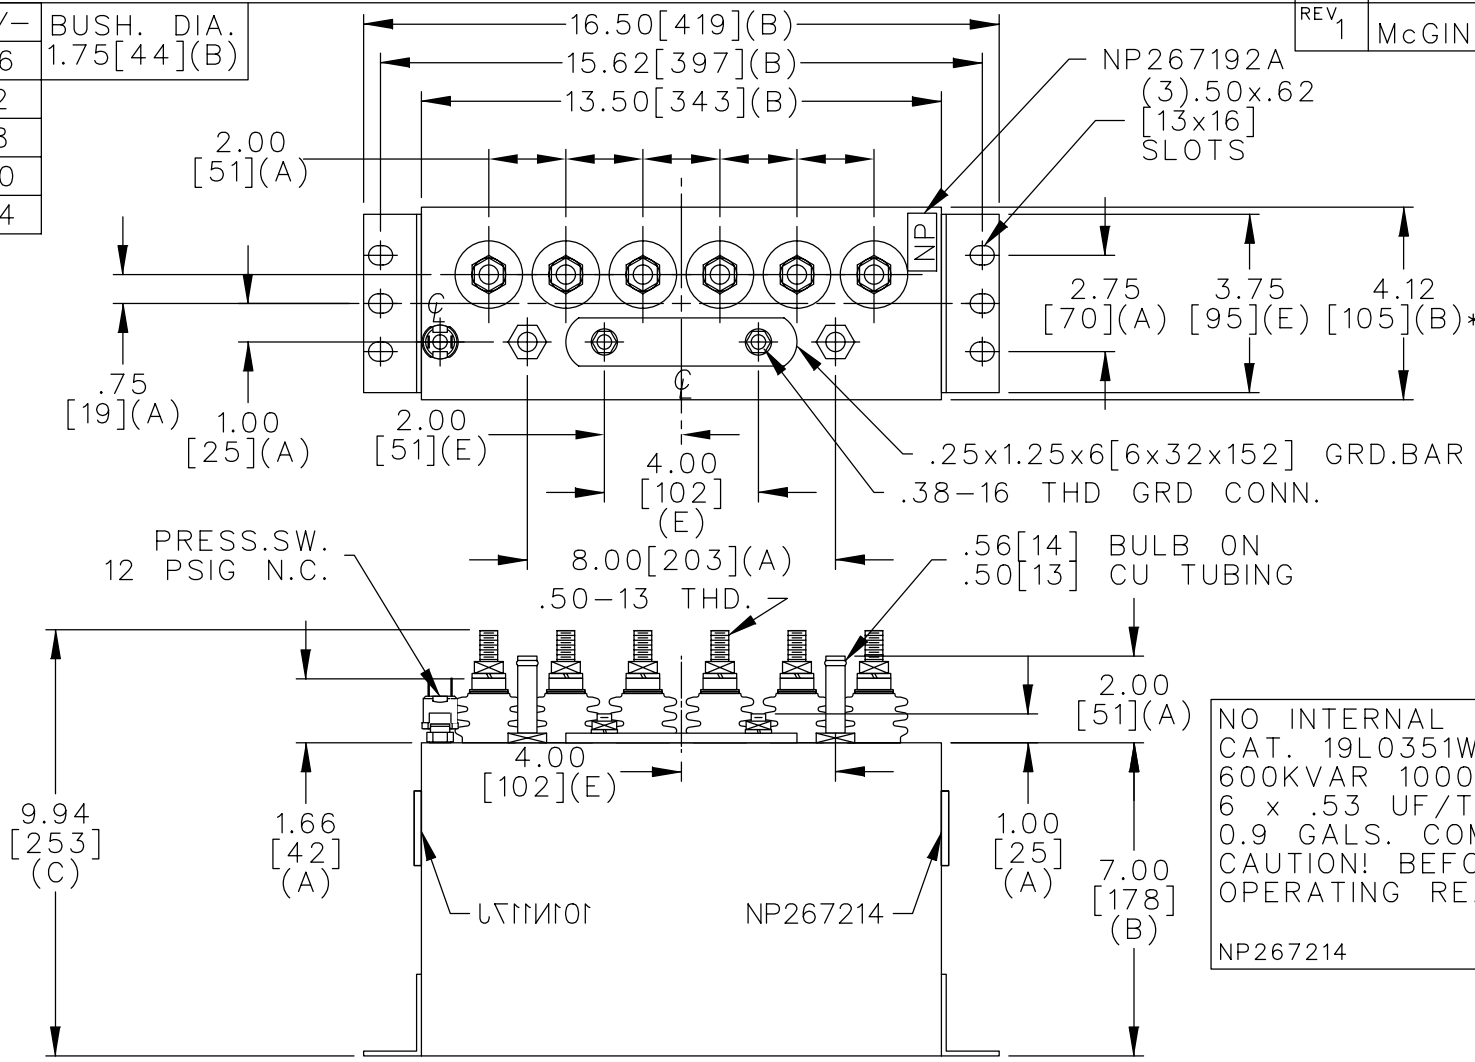

TERM	uF	kVAR
1	53	100
2	53	100
3	53	100
4	53	100
5	53	100
6	53	100

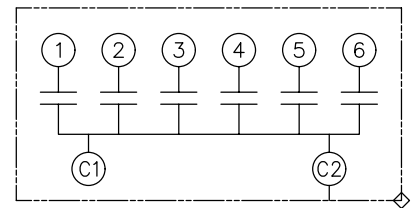

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0351WH4 SN
 600KVAR 1000V 30000HZ 1PH
 6 x .53 UF/TAP
 0.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0351WH4		SHEET 2	CONT. ON -
	DRAWN E.McGINN	MAR. 3, 1999	SCALE				
ISSUED 3-3-99							