




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

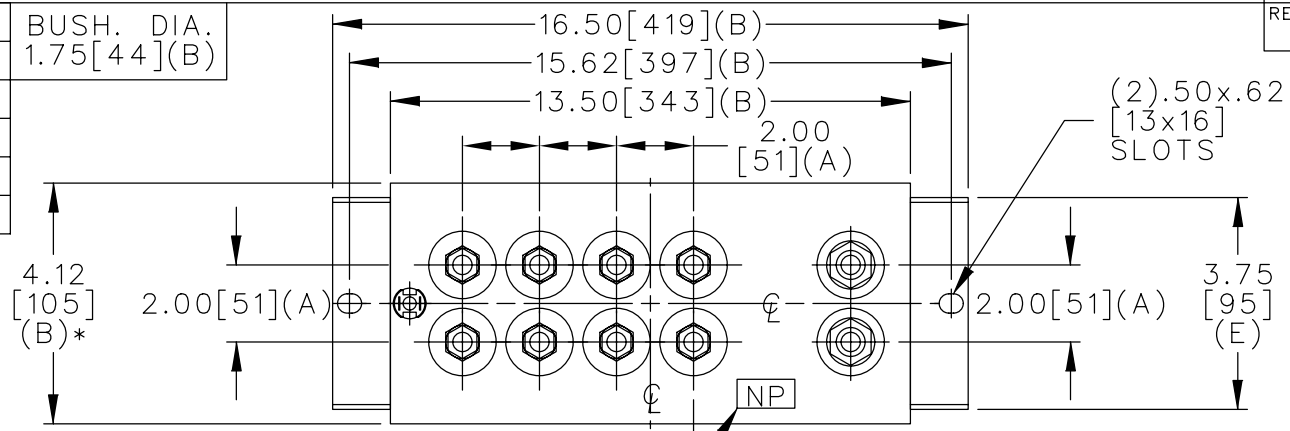

TERM	uF	kVAR
1	6.87	52.25
2	6.87	52.25
3	6.87	52.25
4	6.87	52.25
5	6.87	52.25
6	6.87	52.25
7	6.87	52.25
8	6.87	52.25

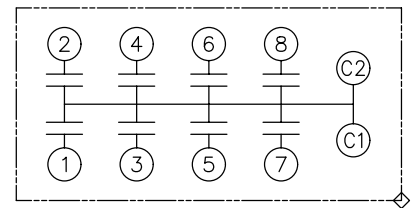

SCHEMATIC DIAGRAM - 800

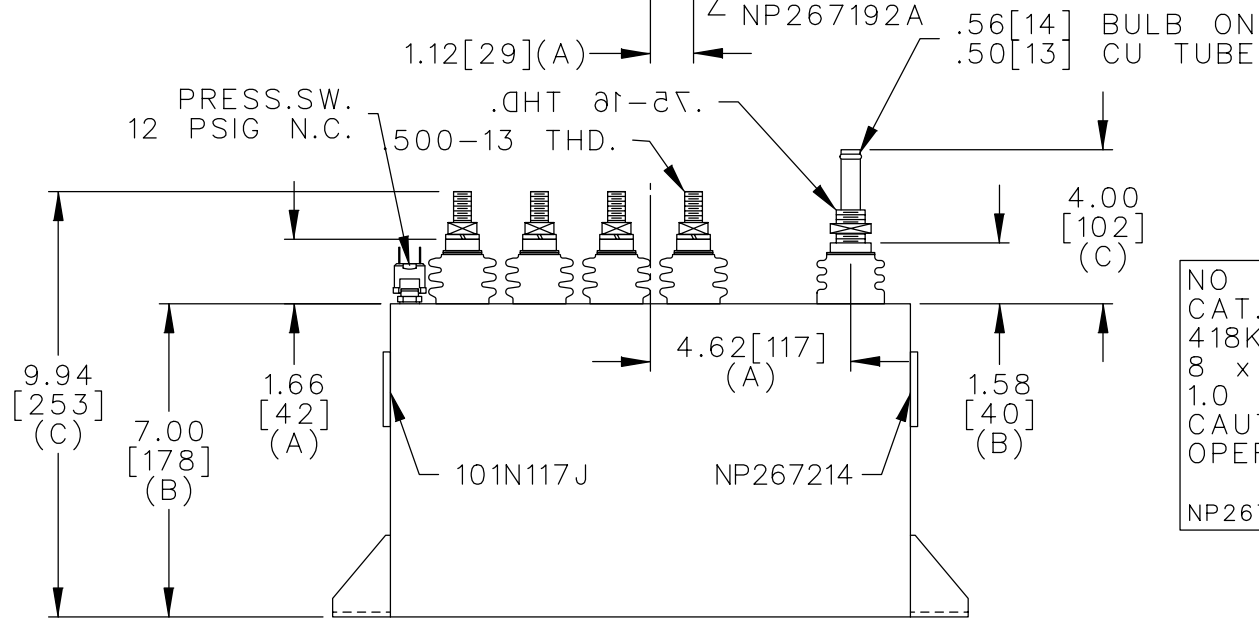

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0357WH4 SN  
 418KVAR 550V 4000HZ 1PH  
 8 x 6.87 UF/TAP  
 1.0 GALS COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<h1>OUTLINE</h1> <h2>19L0357WH4</h2>		SHEET 2 CONT. ON -	DISTR TO
	DRAWN E.McGINN	SEPT. 4, 2001	SCALE				
ISSUED							