



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

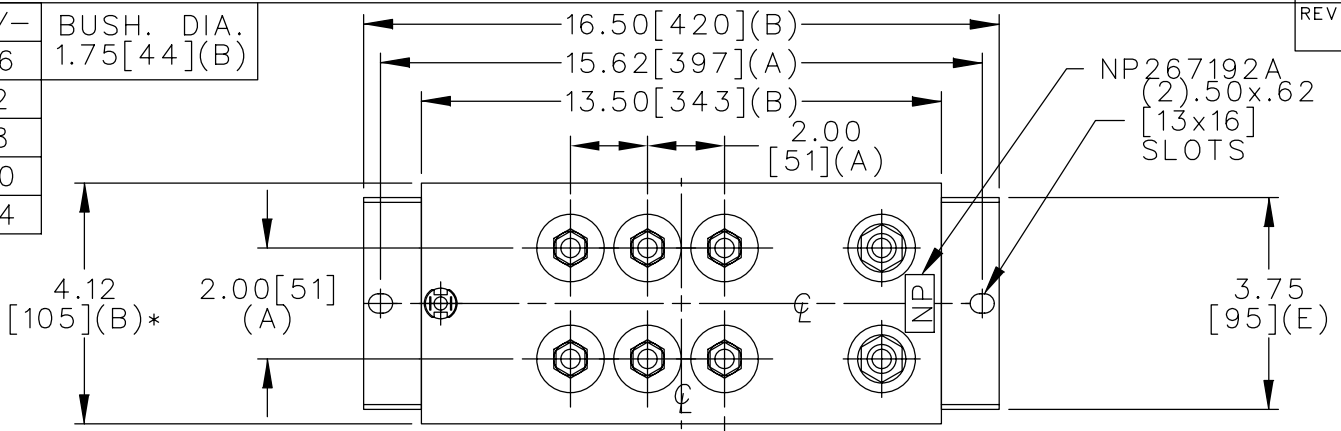


TERM	uF	kVAR
1	5.89	302.5
2	5.89	302.5
3	5.89	302.5
4	5.89	302.5
5	5.89	302.5
6	5.89	302.5

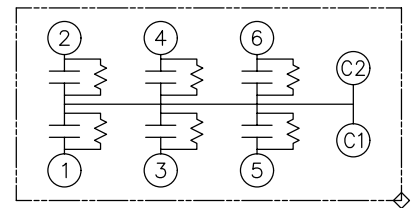

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0361WH4 SN
 1815KVAR 1650V 3000HZ 1PH
 6x5.89 UF/TAP
 1.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

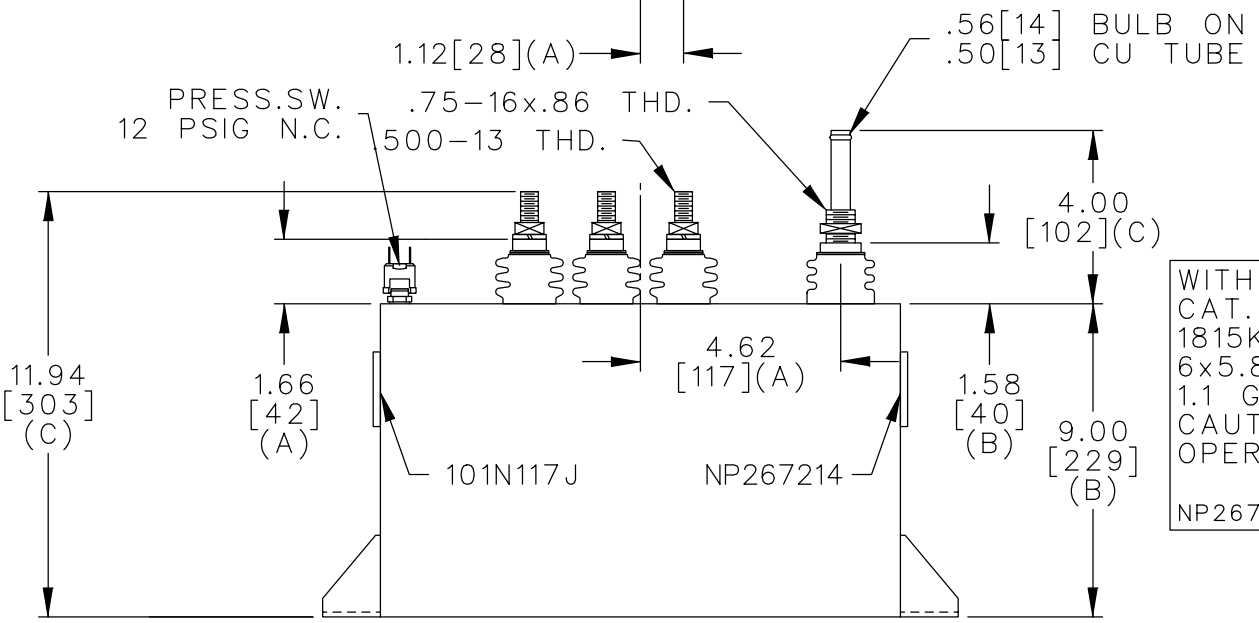

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0361WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	MAY 7, 1998	SCALE		
ISSUED					