



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

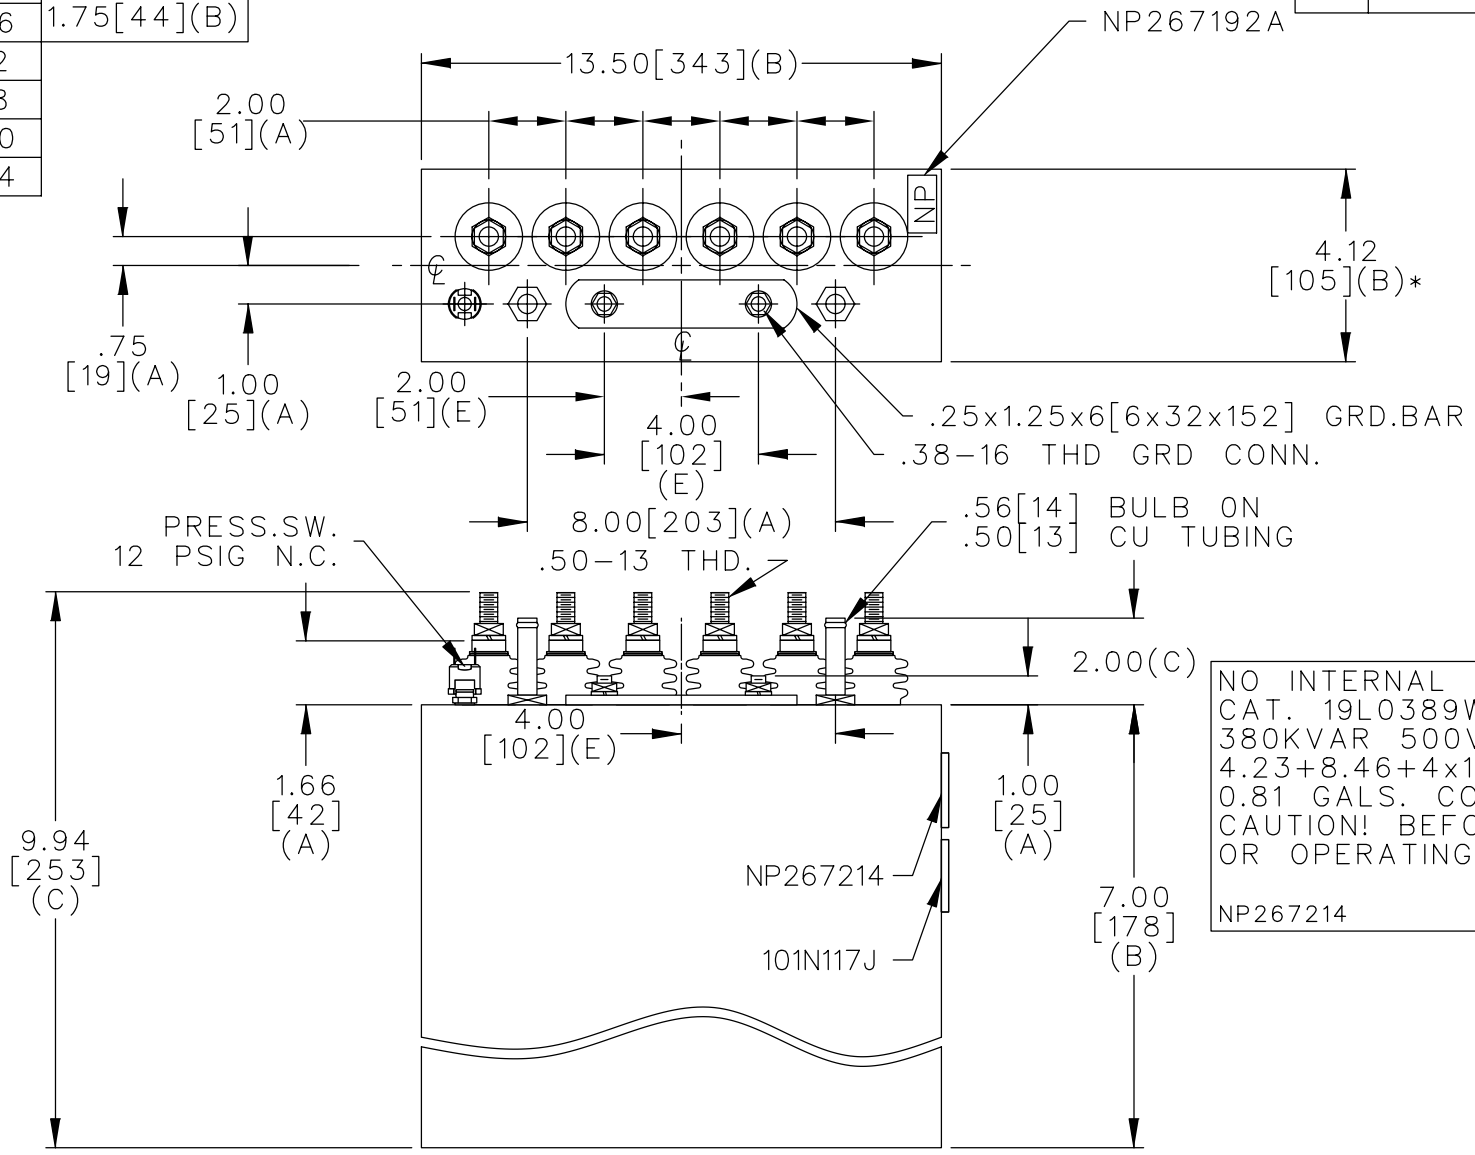

TERM	uF	kVAR
1	4.23	20
2	8.46	40
3	16.92	80
4	16.92	80
5	16.92	80
6	16.92	80

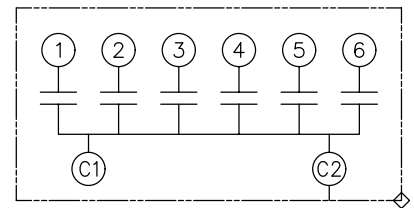

NO INTERNAL DISCH RESISTORS
 CAT. 19L0389WH2 SN
 380KVAR 500V 3000HZ 1PH
 4.23+8.46+4x16.92 UF/TAP
 0.81 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

<p>CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.</p>	SIZE A	<h1>OUTLINE</h1> <h2>19L0389WH2</h2>	DISTR TO
	DRAWN E.McGINN APR. 18, 2001 ISSUED		
SHEET 2		CONT. ON -	