

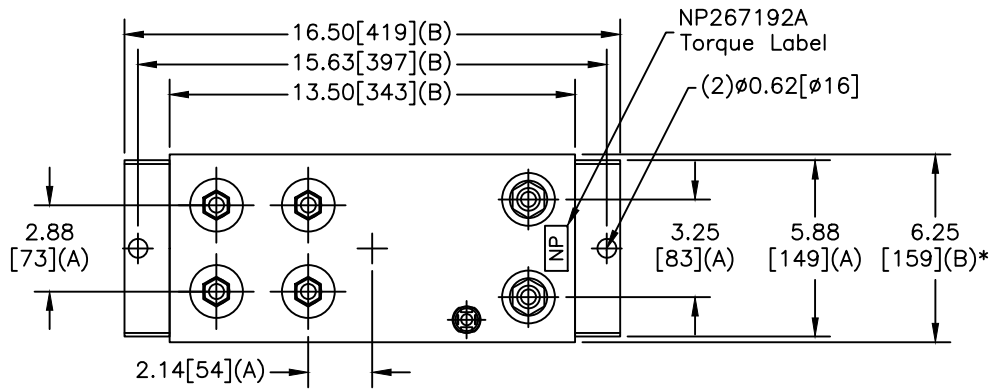


TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH. DIA. 1.75[44](B)	

SIZE A	DWG NO 19L0448WH4	SHT 2	REV 2
REV 2	DESCRIPTION UPDATE NP	DATE 5/13/2014	APPROVED JBC



TERM	uF	kVAR
1	58.95	133.33
2	58.95	133.33
3	29.47	66.67
4	29.47	66.67

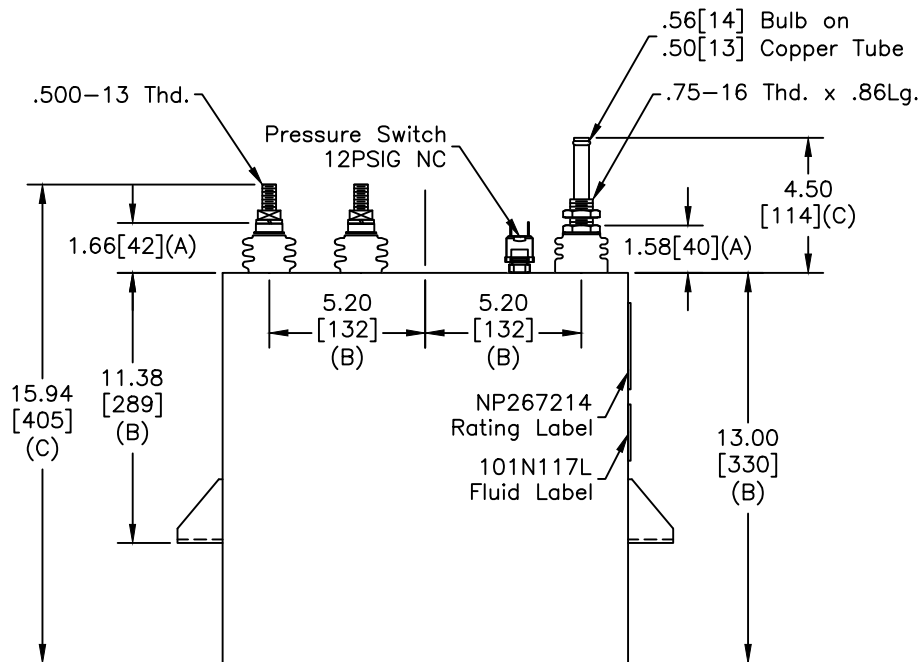

SCHEMATIC DIAGRAM - 422

GE CAPACITOR
WITH INTERNAL DISCHARGE RESISTORS

CAT. 19L0448WH4 SN
400KVAR 1000V 360HZ 1PH
2x58.95+2x29.47UF/TAP
1.74 GAL. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733

MADE IN USA NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS.

NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.	SIZE A	Est Weight 56 lbs.	<h1>OUTLINE</h1> <h2>19L0448WH4</h2>	
	DRAWN E McGinn ISSUED			

DISTR. TO