



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

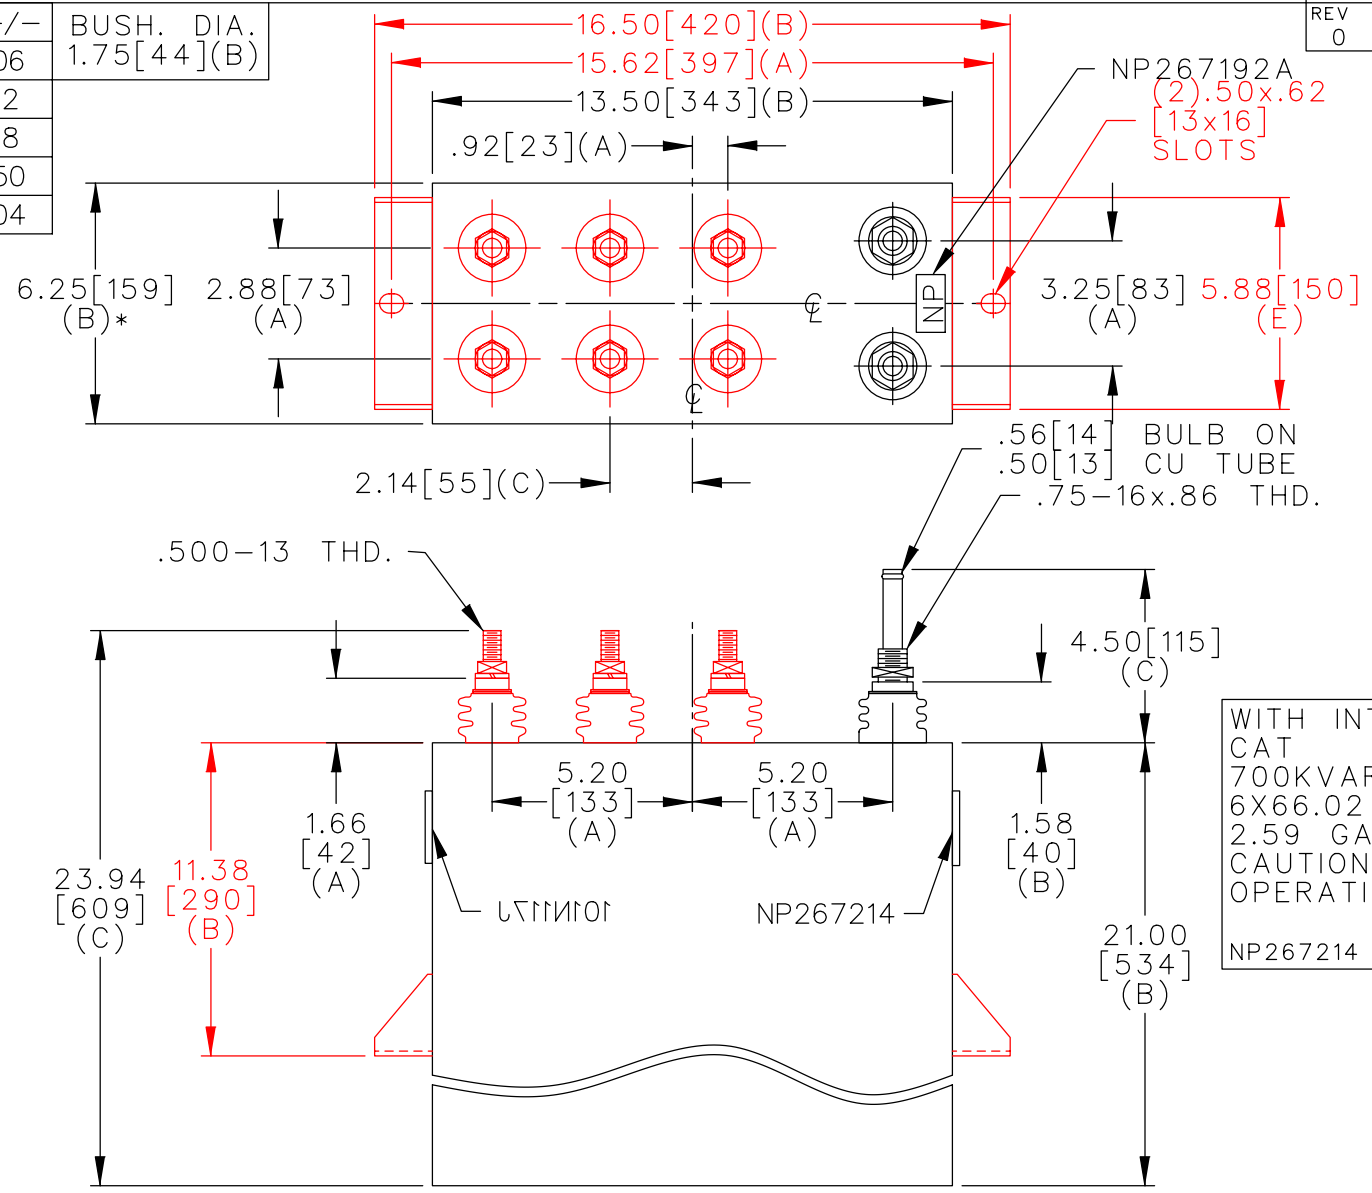

TERM	uF	kVAR
1	66.02	116.7
2	66.02	116.7
3	66.02	116.7
4	66.02	116.7
5	66.02	116.7
6	66.02	116.7

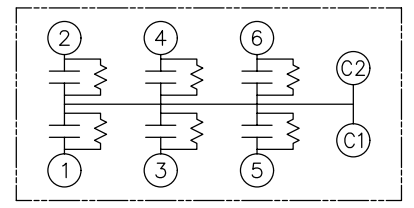

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L0449WH3 SN
 700KVAR 1250V 180HZ 1PH
 6X66.02 UF/TAP
 2.59 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 87 / 40 LB/KG	OUTLINE 19L0449WH3	SHEET 2 CONT. 3 ON 3
	DRAWN 08/31/99	LRD 08/31/99	SCALE WC6	version		
ISSUED						

DISTR TO