
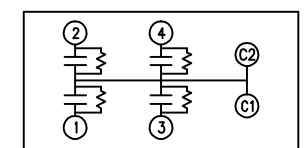
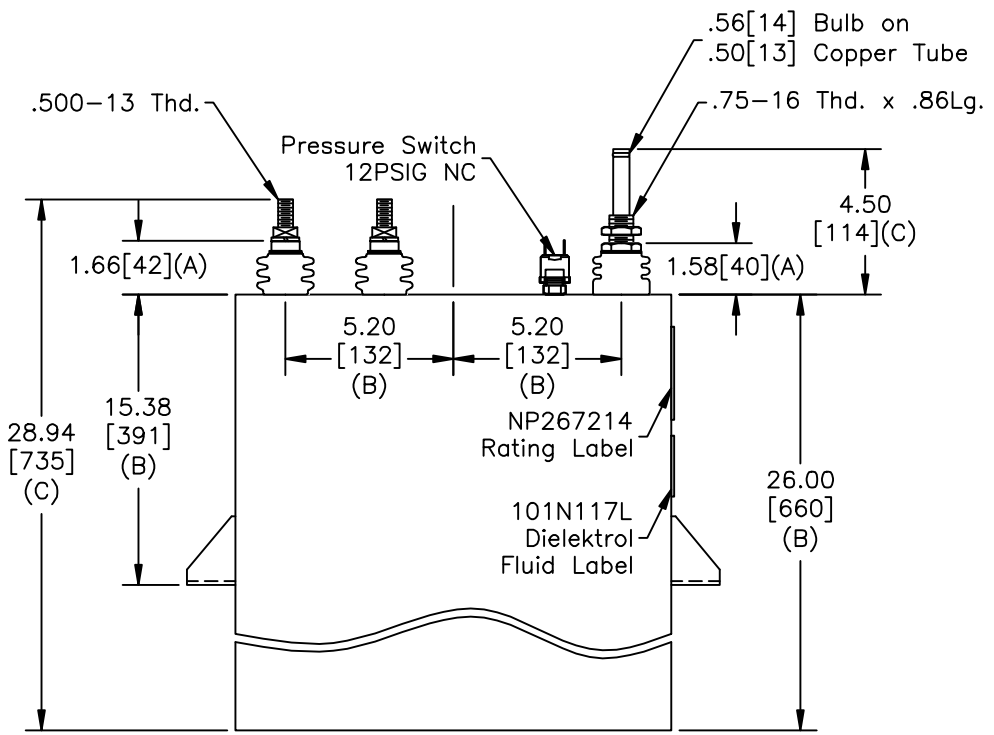


SIZE A	DWG NO 19L0455WH4	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED

TOL	+/-
A	.06
B	.12
C	.18
D	.50
E	.04
BUSH. DIA. 1.75[44](B)	

TERM	uF	kVAR
1	61.4	375
2	61.4	375
3	61.4	375
4	61.4	375

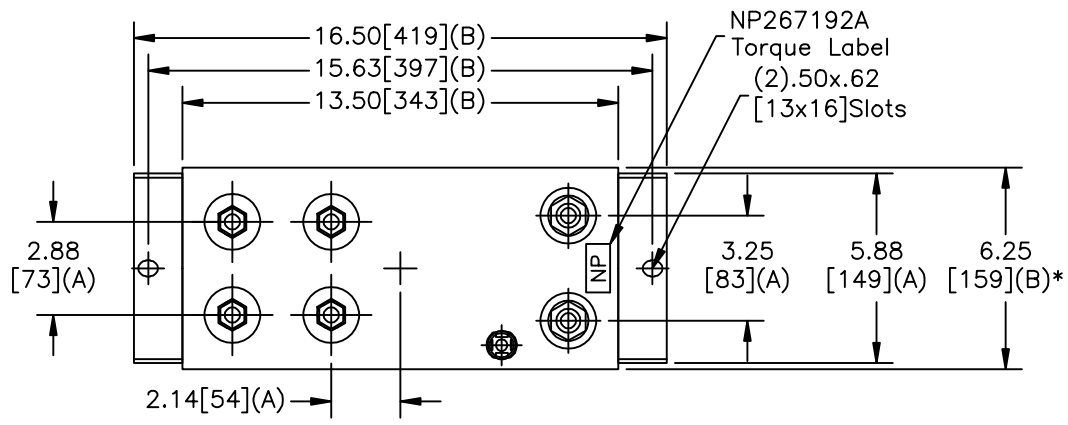

SCHEMATIC DIAGRAM - 422

GE CAPACITOR
WITH INTERNAL DISCHARGE RESISTORS

CAT. 19L0455WH4 SN
1500KVAR 1800V 300HZ 1PH
4x61.4UF/TAP
3.6 GAL. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733

MADE IN USA NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS.

NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.	SIZE A	Est Weight 120 lbs.	<h1 style="text-align: center;">OUTLINE</h1> <h2 style="text-align: center;">19L0455WH4</h2>		DISTR. TO
	DRAWN B Ross ISSUED				