



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

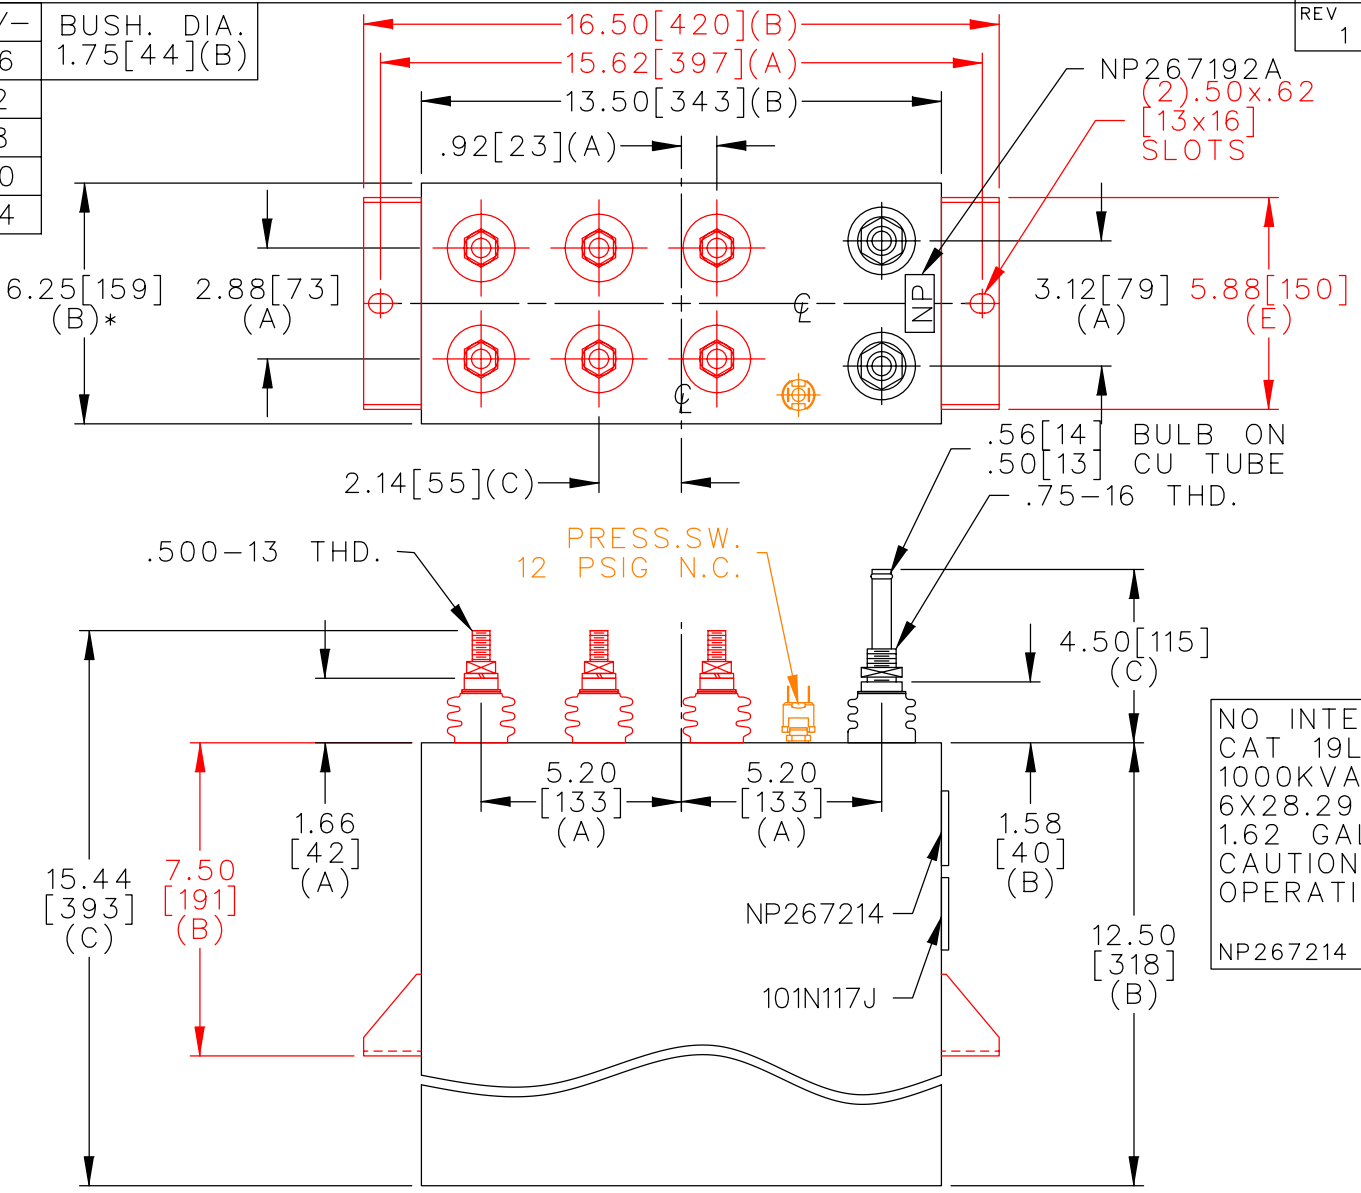

TERM	uF	kVAR
1	28.29	166.7
2	28.29	166.7
3	28.29	166.7
4	28.29	166.7
5	28.29	166.7
6	28.29	166.7

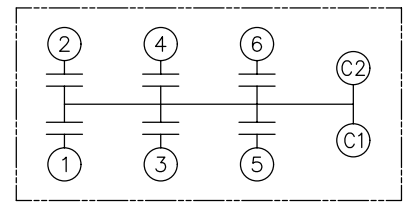

SCHEMATIC DIAGRAM - 615

NO INTERNAL DISCH RESISTORS
 CAT 19L0459WH4 SN
 1000KVAR 1250V 600HZ 1PH
 6X28.29 UF/TAP
 1.62 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 58 / 26 LB/KG	OUTLINE 19L0459WH4	SHEET 2 CONT. 3 ON ON
	DRAWN COZZENS	NOV. 7, 1996	SCALE	DISTR TO		
ISSUED	11-13-96					