


TERM	uF	kVAR
1	24.11	333.3
2	24.11	333.3
3	24.11	333.3
4	24.11	333.3
5	24.11	333.3
6	24.11	333.3

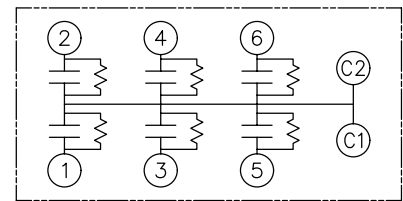

SCHEMATIC DIAGRAM - 617

WITH INTERNAL DISCH RESISTORS
 CAT 19L0484WH4 SN
 2000KVAR 2000V 550HZ 1PH
 6X24.11 UF/TAP
 3.05 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	UNIT WEIGHT 107 / 49 LB/KG	OUTLINE 19L0484WH4	SHEET 2 CONT. 3
	DRAWN 07/03/01	LRD ?	SCALE WC16	version		
ISSUED					SHEET 2 CONT. 3	DISTR TO