



TOL	+/-
A	.06
B	.12
C	.18
D	.25
E	.03

SIZE	DWG NO.	SH	REV
A	19L0492WH3	2	
REV	McGINN CHG NP267214		
1			

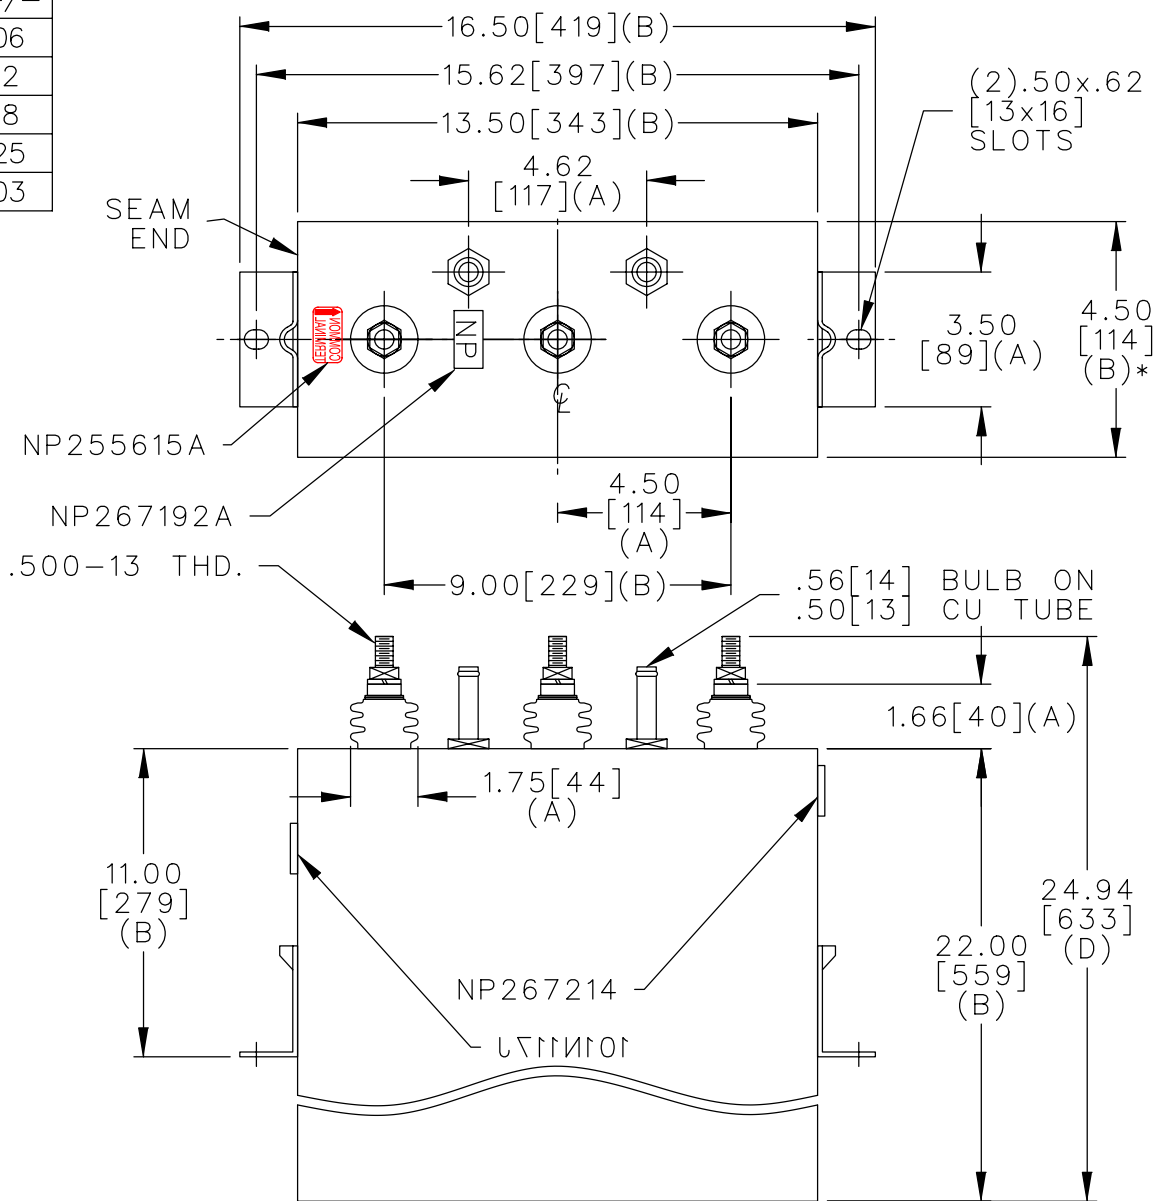

TERM	uF	KVAR
1	184.2	100
2	184.2	100

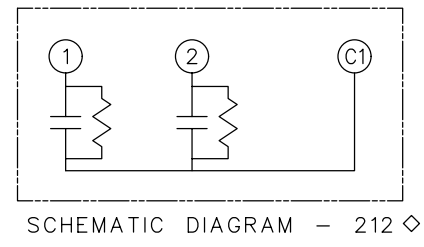

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0492WH3 SN
 200KVAR 1200V 60HZ 1PH
 2 x 184.2 UF/TAP

2.0 GALS COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	FSCM NO	OUTLINE 19L0492WH3	DISTR TO
	DRAWN E.McGINN	SEPT. 8, 1998	SCALE	SHEET 2		
ISSUED	9-9-98					