



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

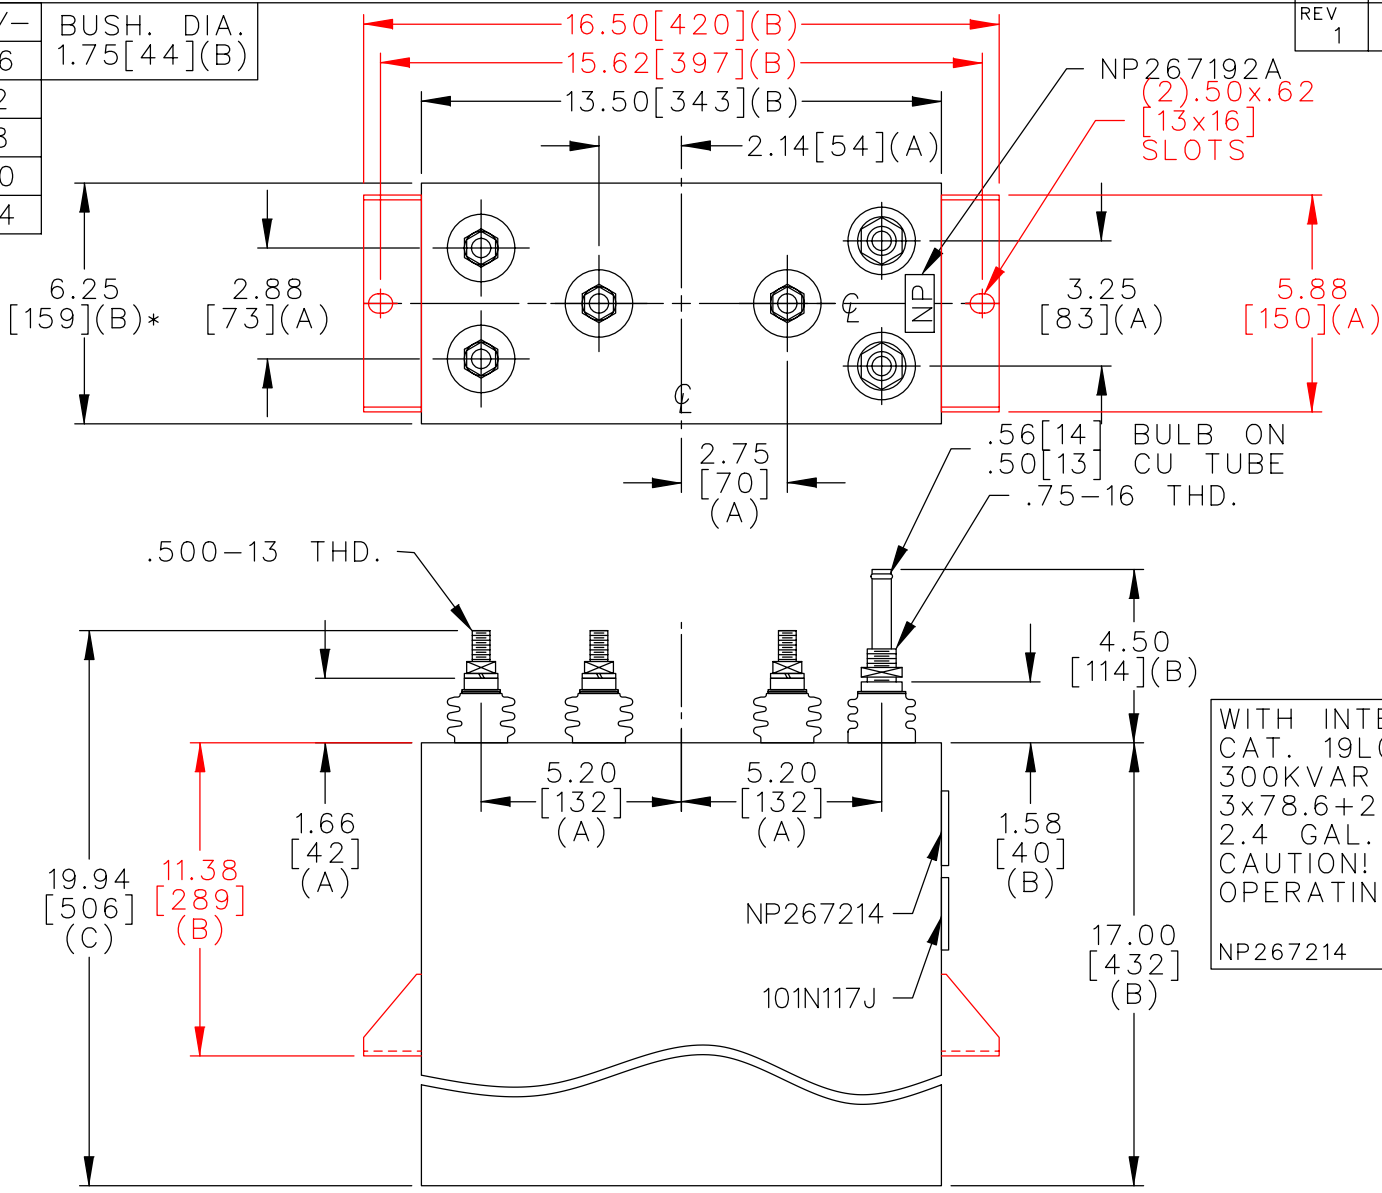

TERM	uF	kVAR
1	78.6	50
2	78.6	50
3	78.6	50
4	235.8	150

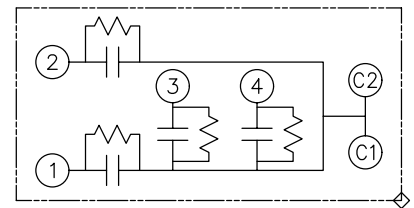

SCHEMATIC DIAGRAM - 432

WITH INTERNAL DISCH RESISTORS
 CAT. 19L0496WH3 SN
 300KVAR 750V 180HZ 1PH
 3x78.6+235.8UF/TAP
 2.4 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0496WH3	DISTR TO
	DRAWN E.McGINN	OCT. 29, 1996	SCALE		
ISSUED	10-30-96	SHEET 2	CONT. ON 3		