




TOL	+/-	BUSH. DIA.
A	.06	1.75 [44] (B)
B	.12	
C	.18	
D	.50	
E	.04	

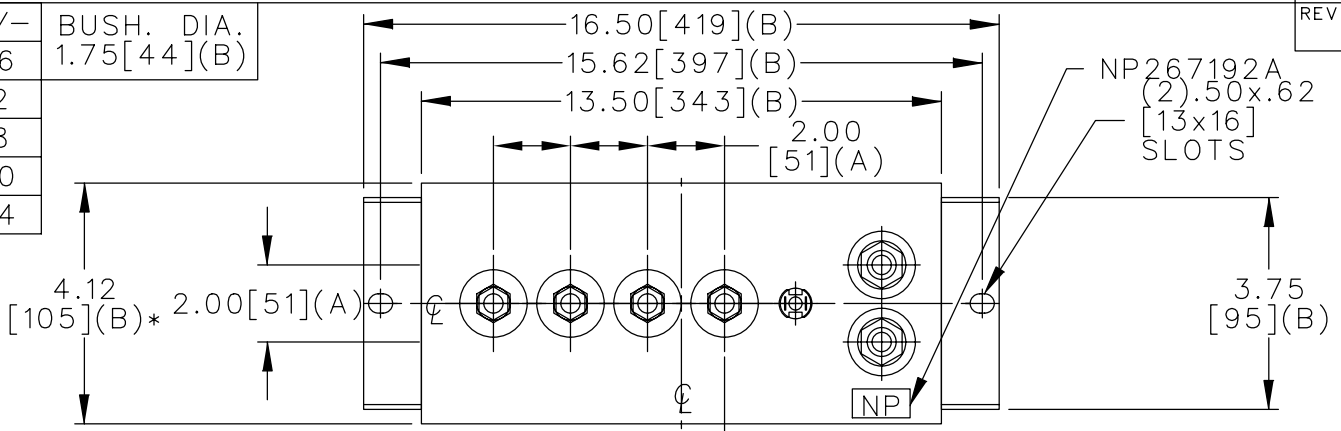

TERM	uF	kVAR
1	5.73	90
2	5.73	90
3	5.73	90
4	5.73	90

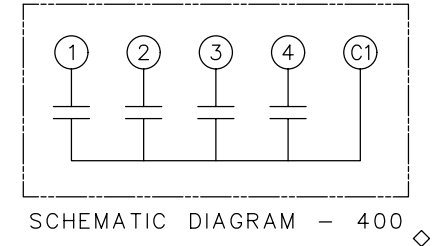

1.12 [28] (A)
 .75-16x.86 THD. PRESS. SW. 12 PSIG N.C.
 .500-13 THD.
 .56 [14] BULB ON .50 [13] CU TUBE

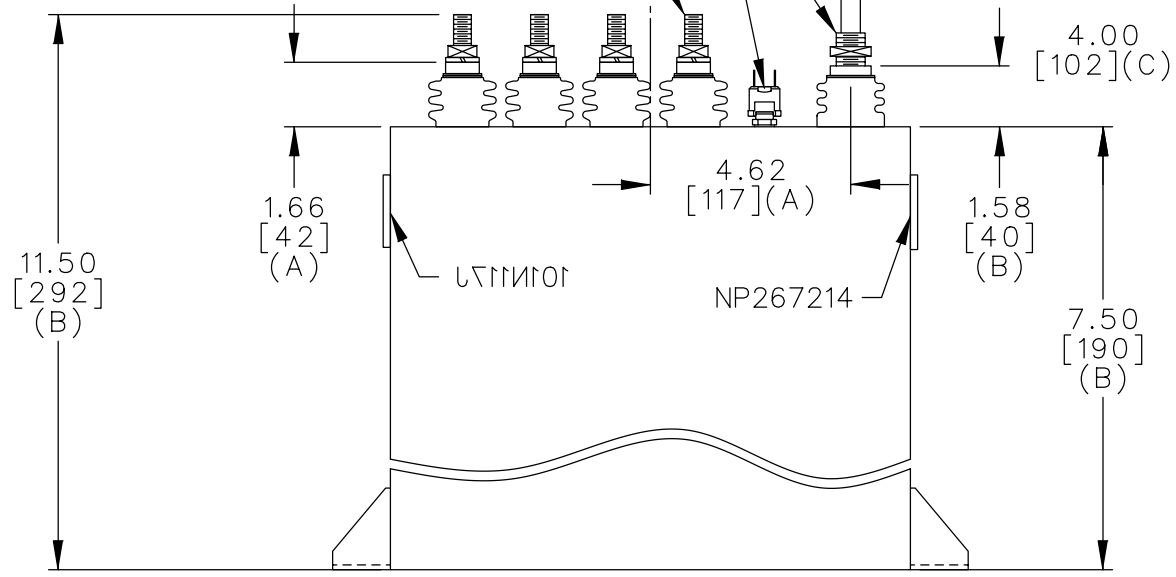

NO INTERNAL DISCH RESISTORS
 CAT. 19L0504WH4 SN
 360KVAR 500V 10.0KHZ 1PH
 4 X 5.73 UF/TAP
 .89 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0504WH4	
	DRAWN E. McGINN	OCT. 10, 2001	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO