




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

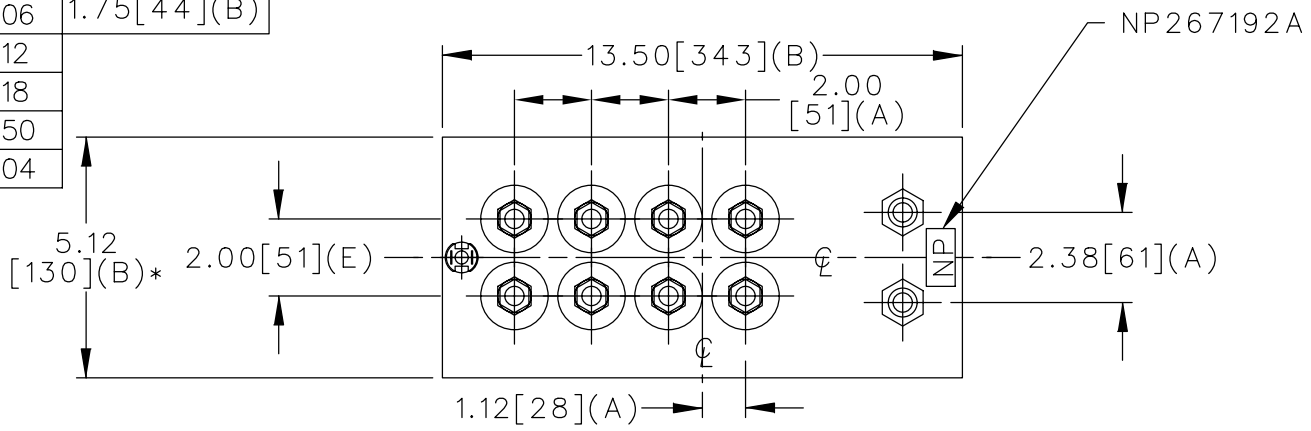

TERM	uF	kVAR
1	10.91	187.5
2	10.91	187.5
3	10.91	187.5
4	10.91	187.5
5	10.91	187.5
6	10.91	187.5
7	10.91	187.5
8	10.91	187.5

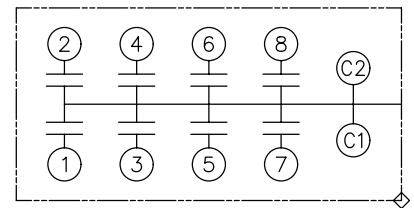

SCHEMATIC DIAGRAM - 801

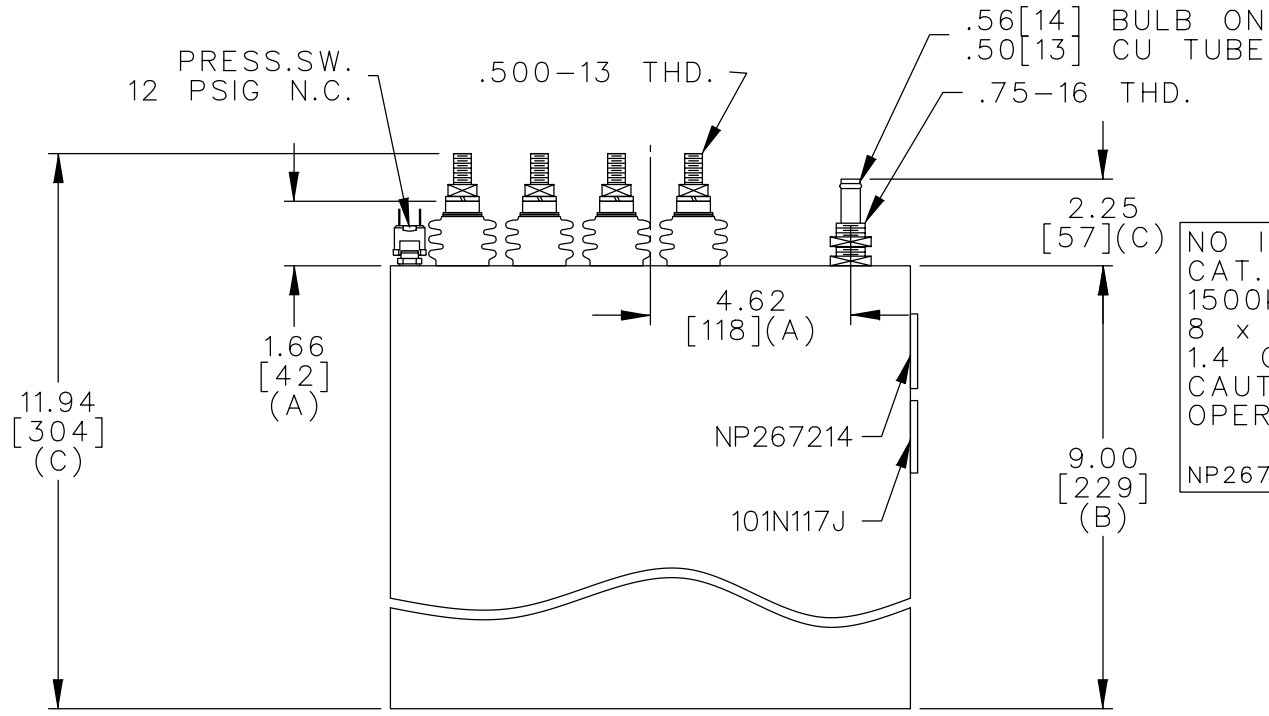

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0511WH4 SN  
 1500KVAR 625V 7000HZ 1PH  
 8 x 10.91UF/TAP  
 1.4 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0511WH2</b>	SHEET 2 CONT. ON -
	DRAWN P.COLE	AUG. 28, 1997	SCALE		
ISSUED	9-3-97	DISTR TO			