

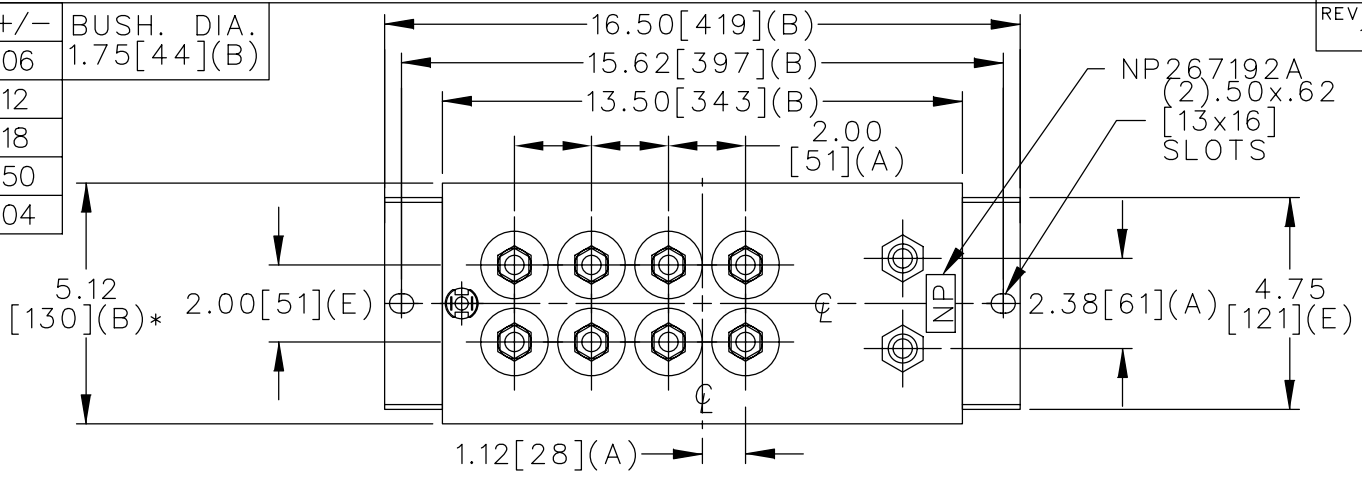


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

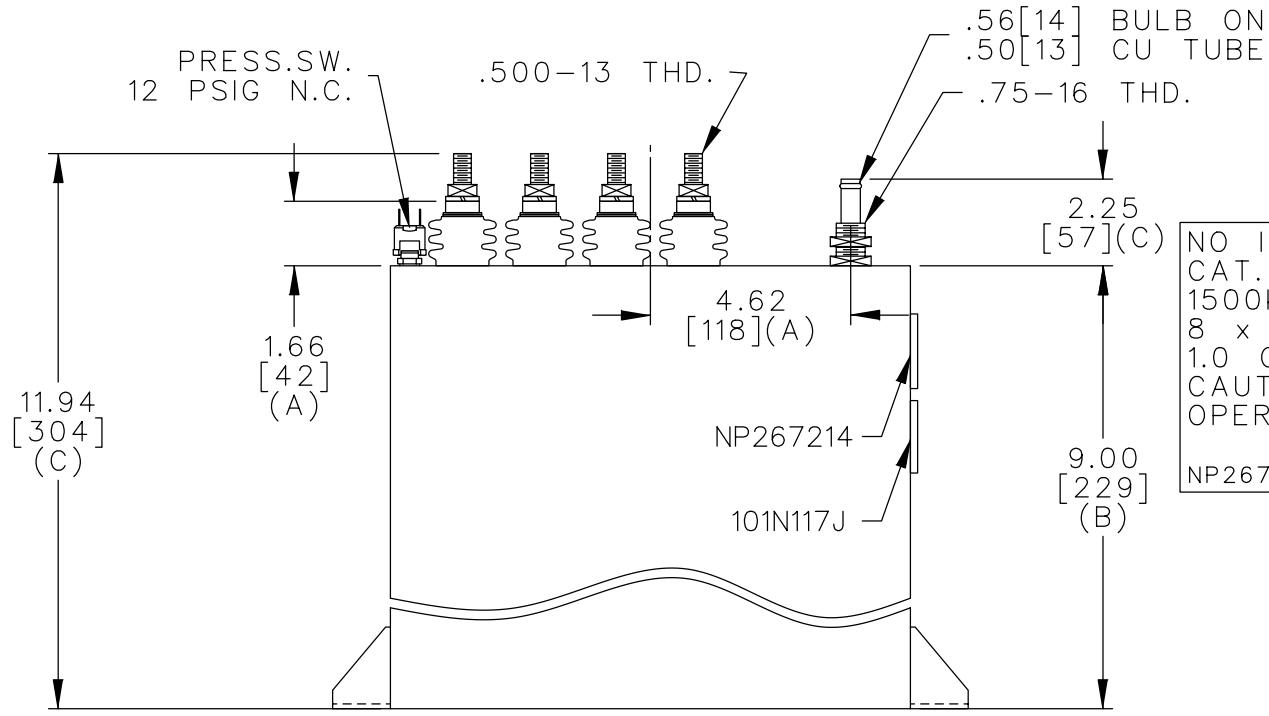

TERM	uF	kVAR
1	10.91	187.5
2	10.91	187.5
3	10.91	187.5
4	10.91	187.5
5	10.91	187.5
6	10.91	187.5
7	10.91	187.5
8	10.91	187.5

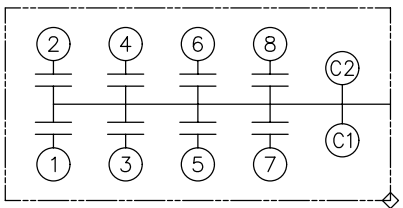

NO INTERNAL DISCH RESISTORS
 CAT. 19L0511WH4 SN
 1500KVAR 625V 7000HZ 1PH
 8 x 10.91UF/TAP
 1.0 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0511WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	NOV. 18, 1996	SCALE		
ISSUED	11-20-96	DISTR TO			