




TOL	+/-	BUSH. DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

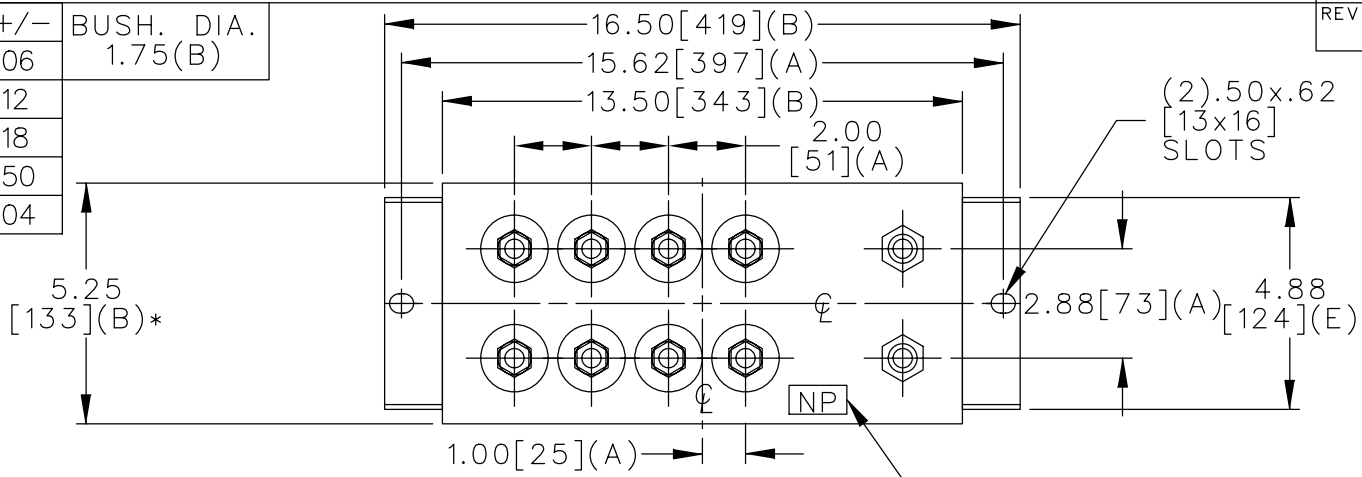

TERM	uF	kVAR
1	3.82	375
2	3.82	375
3	3.82	375
4	3.82	375
5	3.82	375
6	3.82	375
7	3.82	375
8	3.82	375

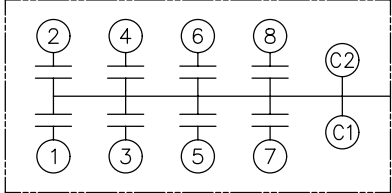

SCHEMATIC DIAGRAM - 801

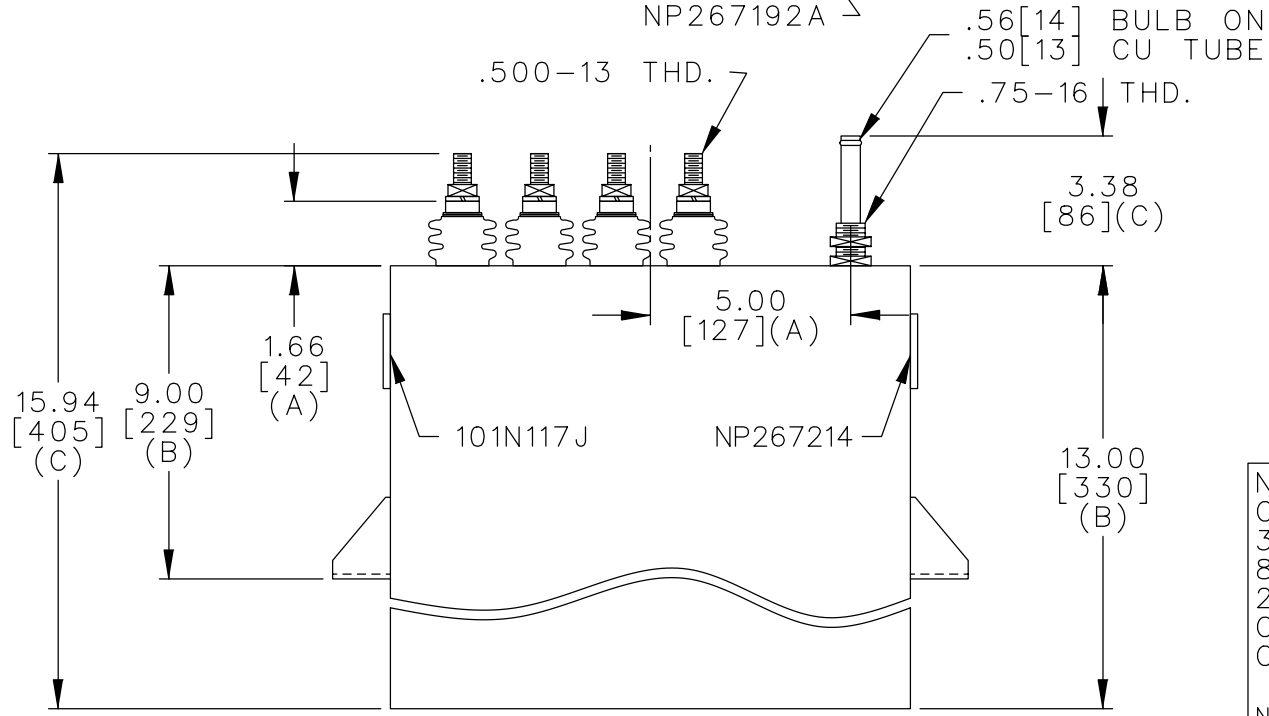

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0516WH3 SN  
 3000KVAR 1250V 10000HZ 1PH  
 8 x 3.82 UF  
 2.4 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING  
 OR OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50 [13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0516WH3</b>		SHEET 2	CONT. ON -
	DRAWN E.McGINN	AUG. 6, 2001	SCALE				
ISSUED							