
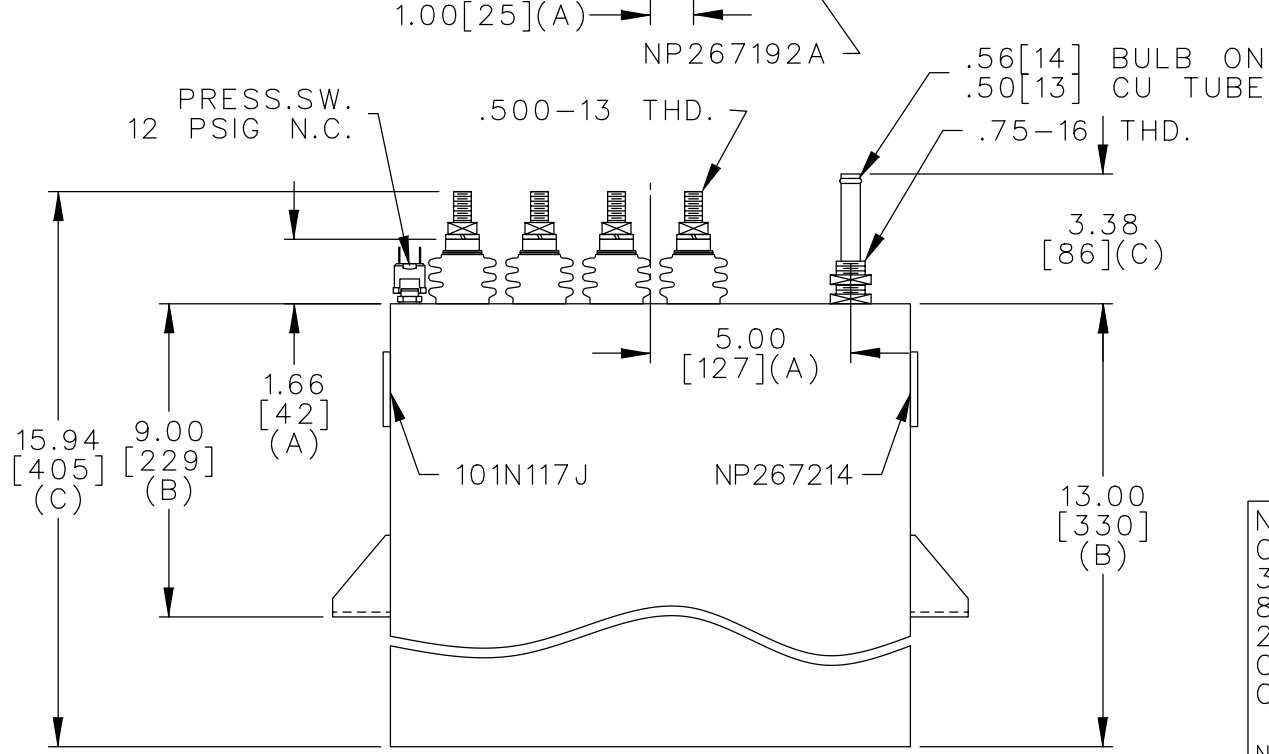


TERM	uF	kVAR
1	3.82	375
2	3.82	375
3	3.82	375
4	3.82	375
5	3.82	375
6	3.82	375
7	3.82	375
8	3.82	375

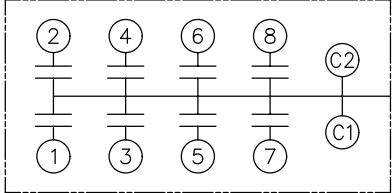

NO INTERNAL DISCH RESISTORS
 CAT. 19L0516WH4 SN
 3000KVAR 1250V 10000HZ 1PH
 8 x 3.82 UF
 2.4 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0516WH4		SHEET 2	CONT. ON -
	DRAWN E.McGINN	JAN. 23, 1997	SCALE				
ISSUED 1-30-97							