




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

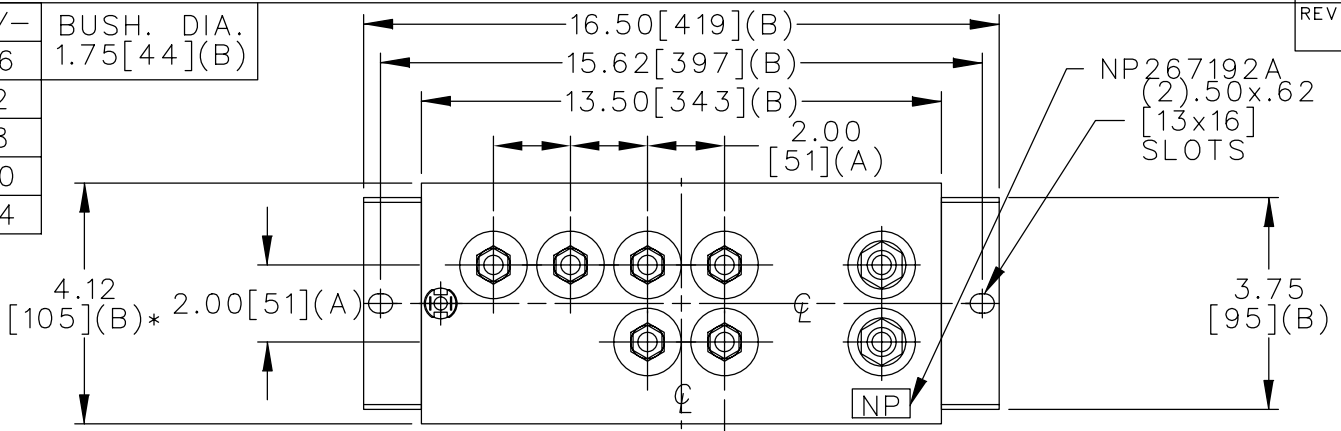


TERM	uF	kVAR
1	.717	11.26
2	1.433	22.52
3	2.867	45.03
4	5.733	90.06
5	5.733	90.06
6	5.733	90.06

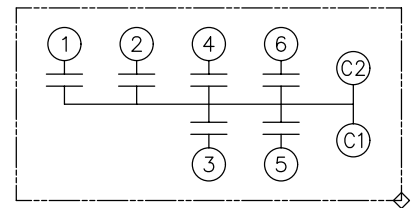

SCHEMATIC DIAGRAM - 610

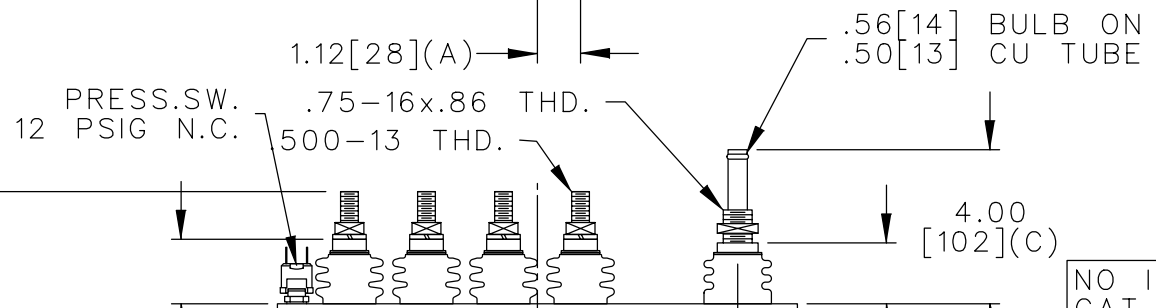

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0527WH4 SN  
 349KVAR 500V 10.0KHZ 1PH  
 .72+1.4+2.9+3X5.7 UF/TAP  
 .90 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

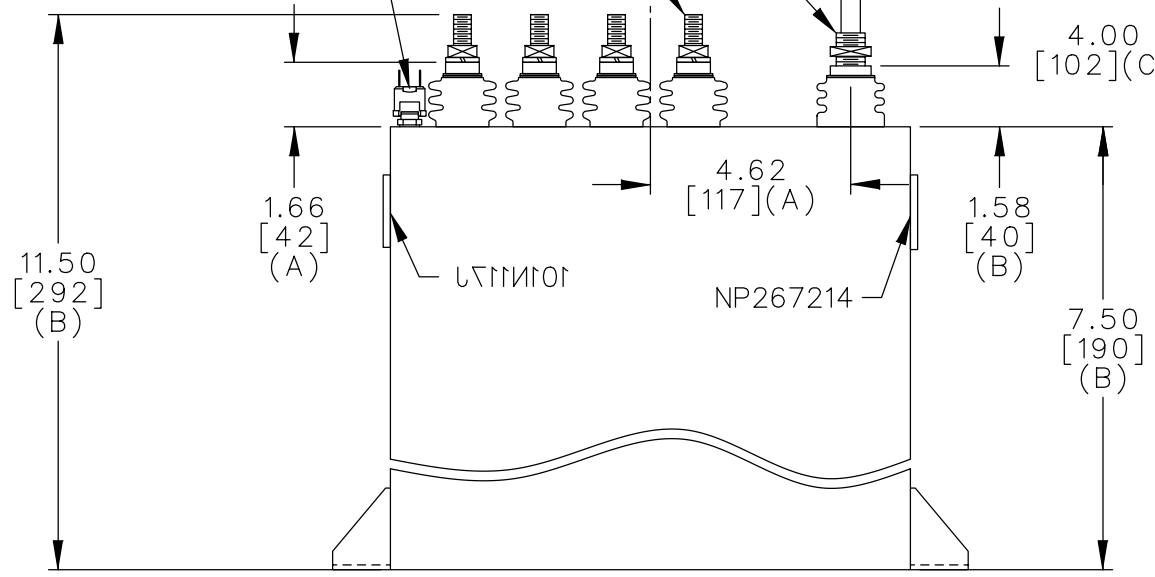

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0527WH4</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	OCT. 10, 2001	SCALE		
ISSUED					DISTR TO