



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

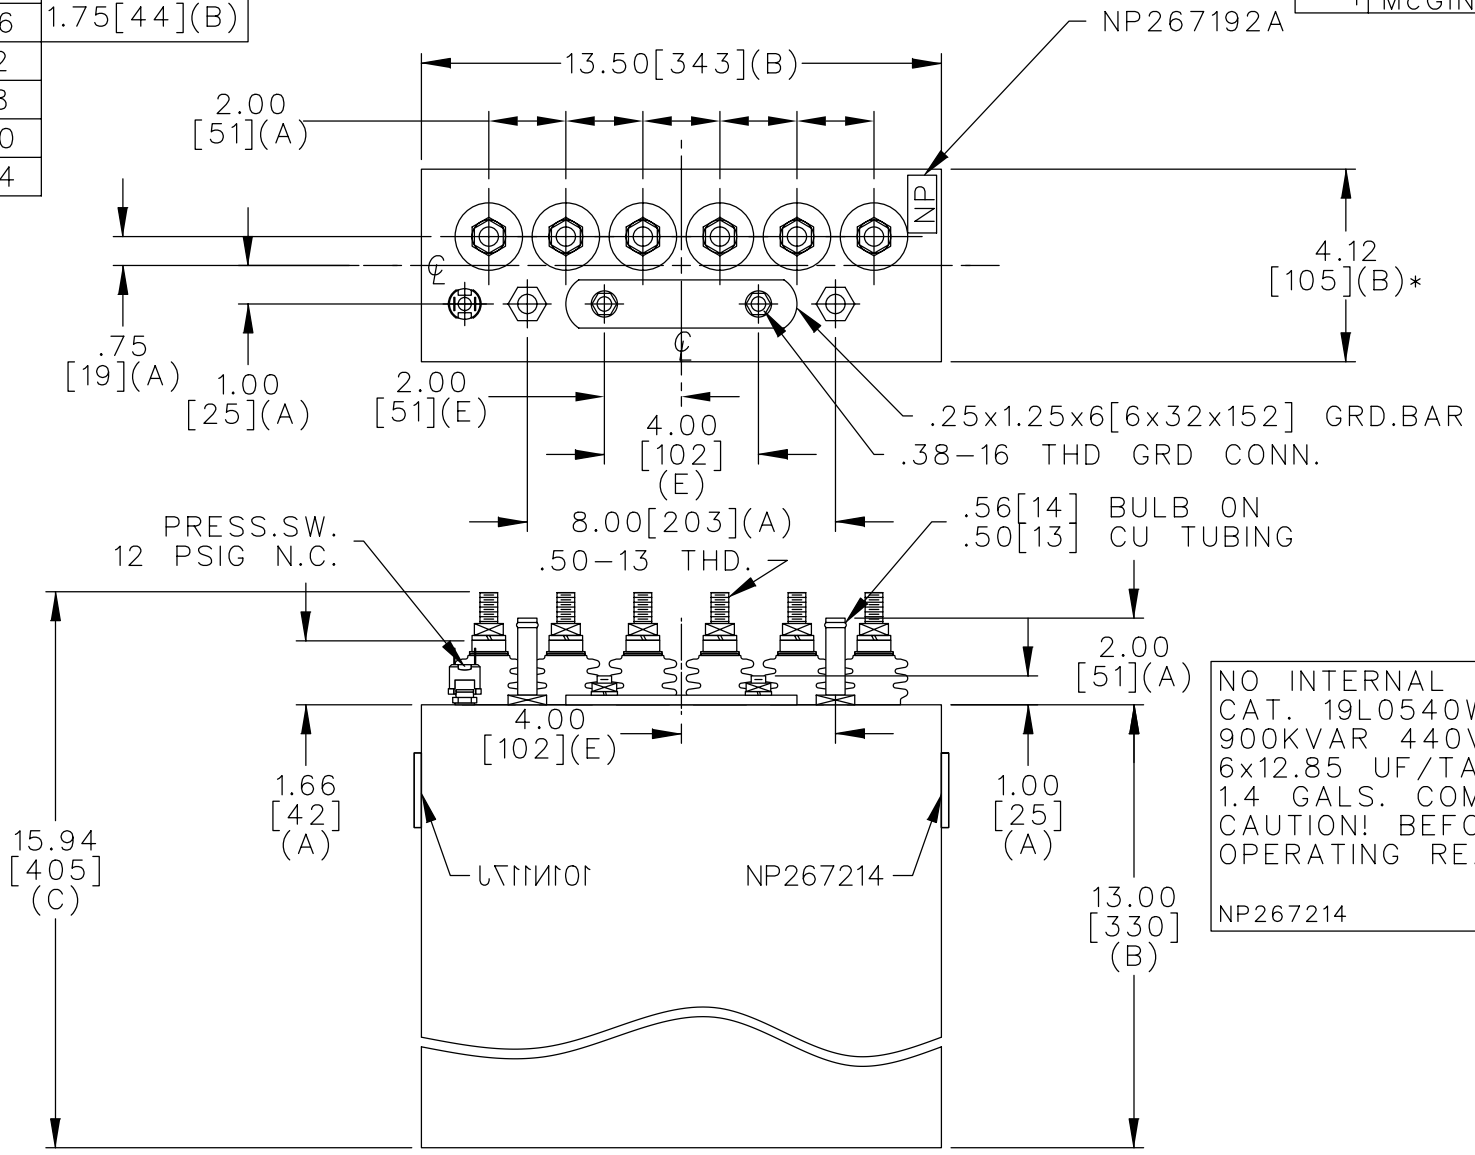

TERM	uF	kVAR
1	12.85	150
2	12.85	150
3	12.85	150
4	12.85	150
5	12.85	150
6	12.85	150

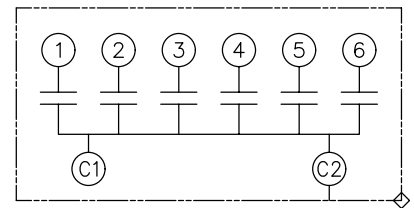

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0540WH2 SN
 900KVAR 440V 9600HZ 1PH
 6x12.85 UF/TAP
 1.4 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0540WH2	
	DRAWN E.McGINN	JULY 29, 1997	SCALE		
ISSUED	7-30-97		SHEET 2	CONT. ON -	DISTR TO