



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

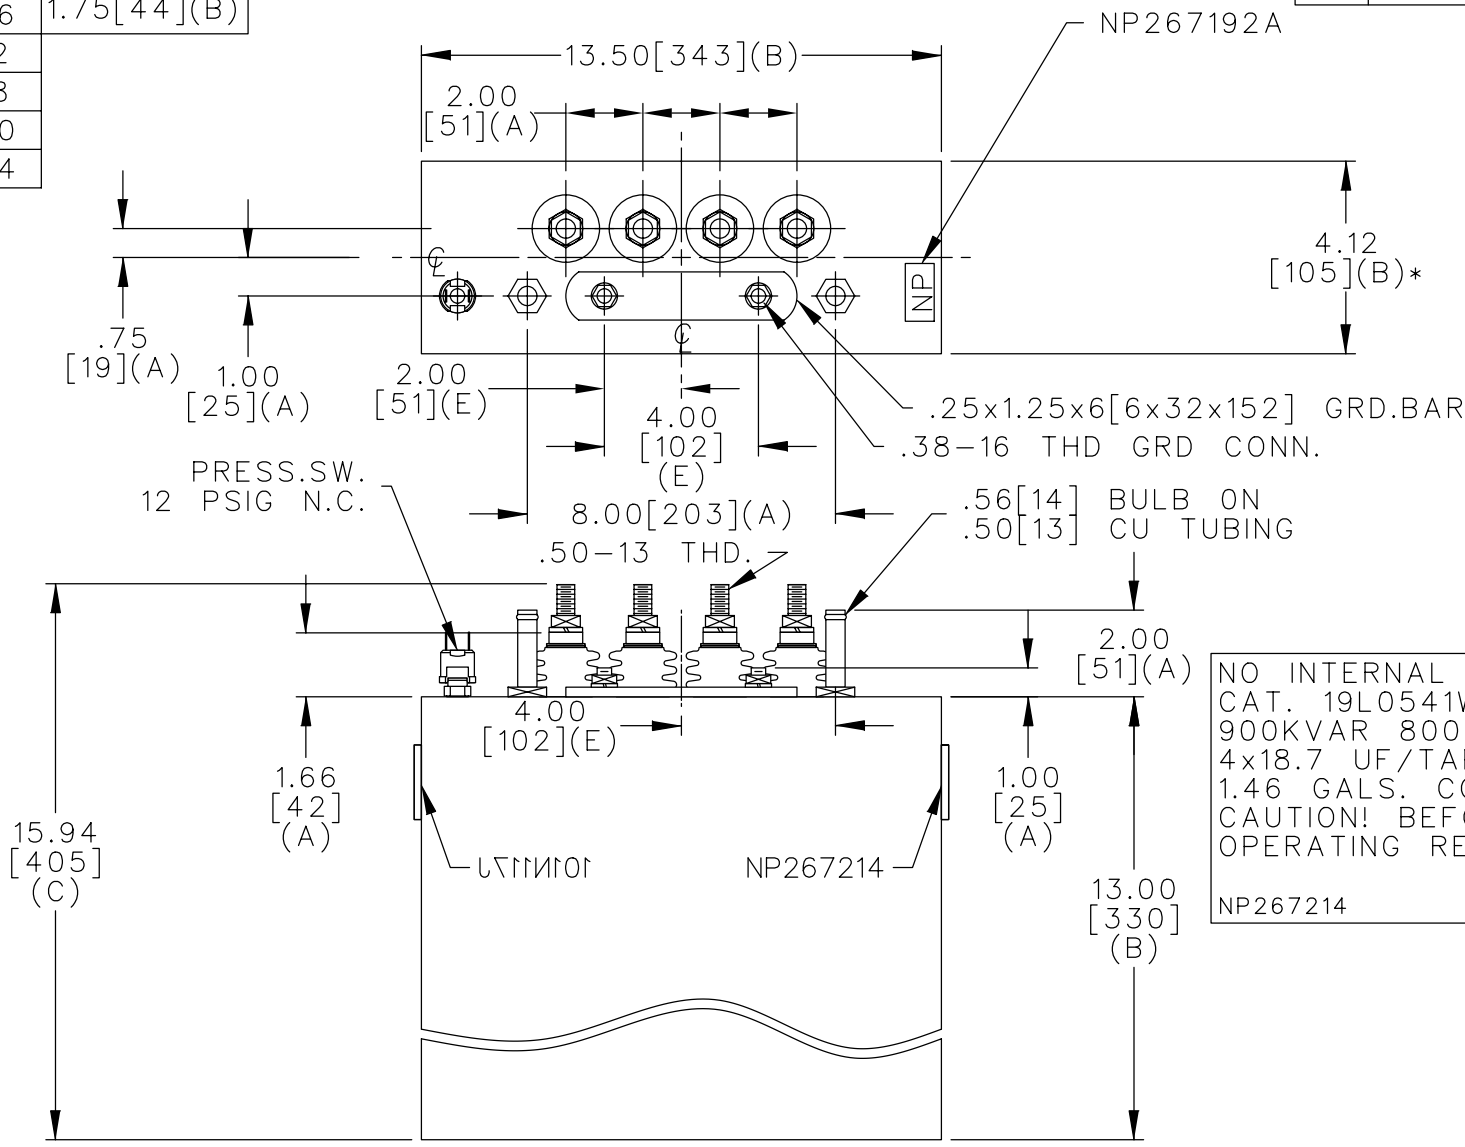

TERM	uF	kVAR
1	18.7	225
2	18.7	225
3	18.7	225
4	18.7	225

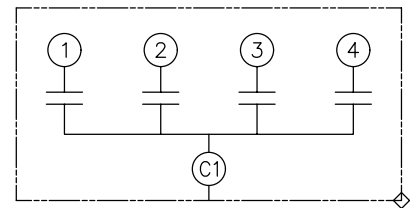

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0541WH2 SN  
 900KVAR 800V 3000HZ 1PH  
 4x18.7 UF/TAP  
 1.46 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
	DRAWN E.McGINN	JUNE 2, 1997
ISSUED	6-2-97	

SIZE <b>A</b>
SCALE

<h1>OUTLINE</h1> <h2>19L0541WH2</h2>	
SHEET 2	CONT. ON -

DISTR TO