



TOL	+/-	BUSH, DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

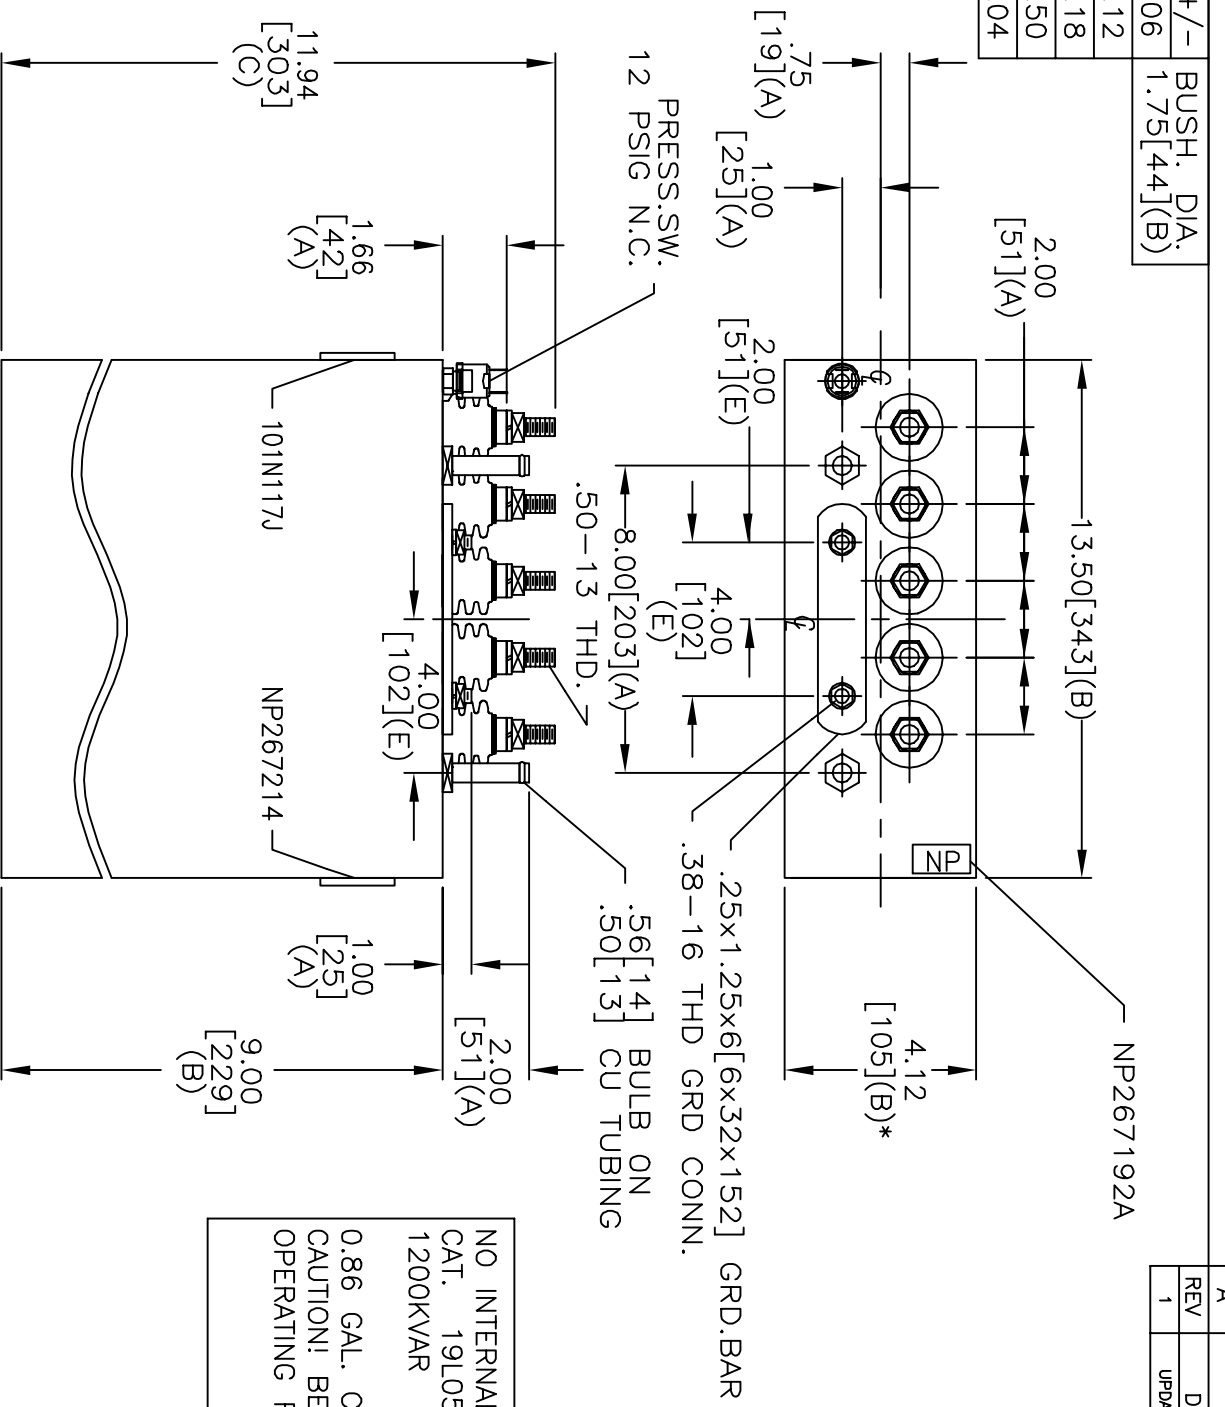

REV	DESCRIPTION	DATE	APPROVED
1	UPDATE TO AUTOCAD	10/30/02	BTR

TERM	UF	KVAR
1	6.22	240
2	6.22	240
3	6.22	240
4	6.22	240
5	6.22	240

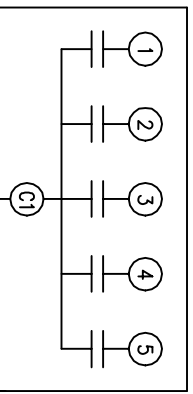

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0542WH4 SN  
 1200KVAR 800V 9600HZ 1PH  
 0.86 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS  
 FORT EDWARD, N.Y., U.S.A.

DRAWN	E. McGinn	DATE	FEB. 4, 1997
ISSUED		DATE	2-5-97

OUTLINE

19L0542WH2

SHEET	2	CONT	
ON			

DISTR. TO