



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

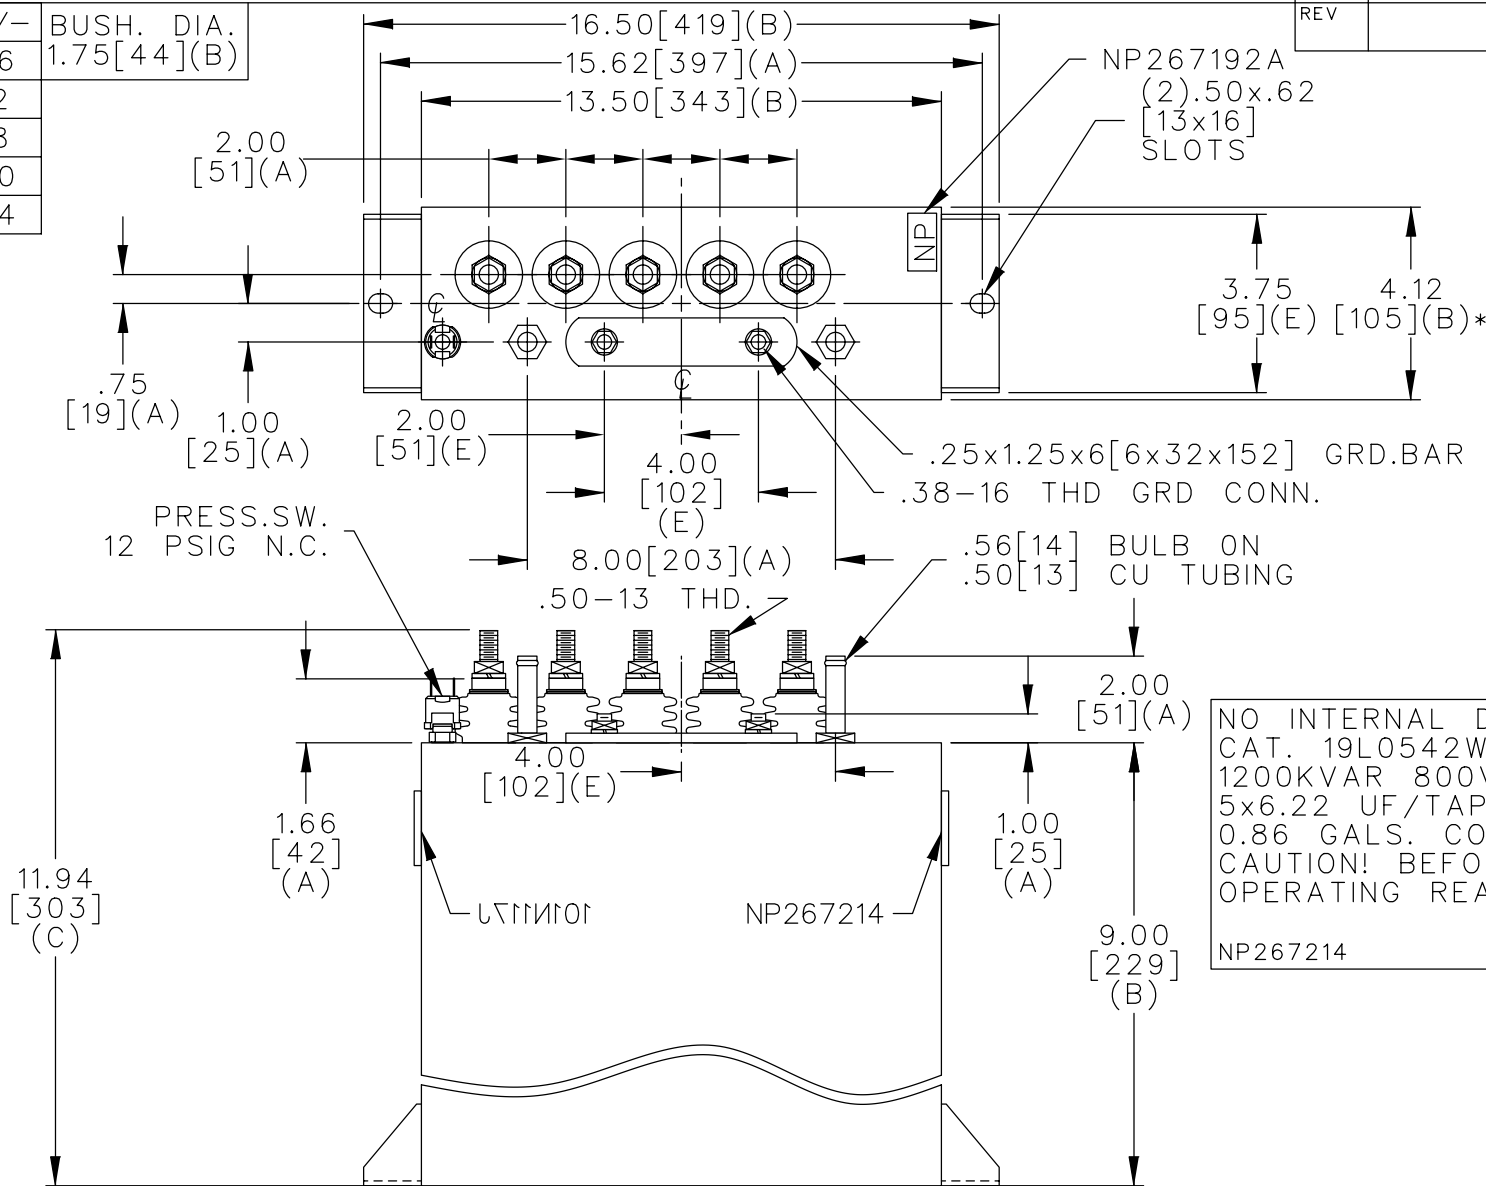

TERM	uF	kVAR
1	6.22	240
2	6.22	240
3	6.22	240
4	6.22	240
5	6.22	240

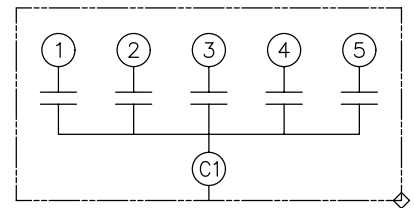

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0542WH4 SN  
 1200KVAR 800V 9600HZ 1PH  
 5x6.22 UF/TAP  
 0.86 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0542WH4</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	SEPT. 15, 1997	SCALE		
ISSUED				DISTR TO	