




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

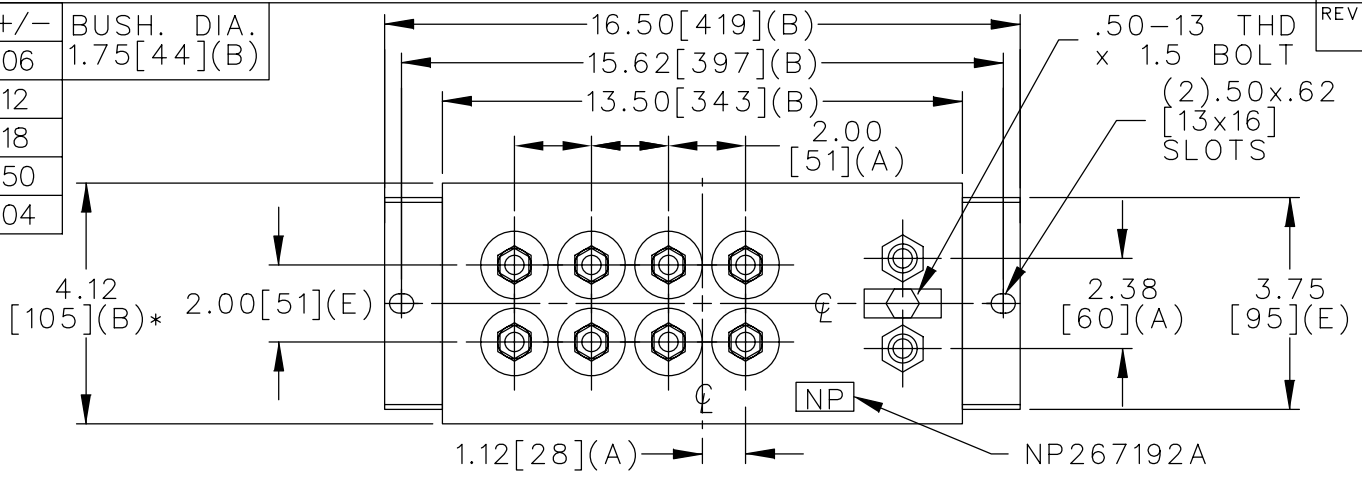

TERM	uF	kVAR
1	3.4	100
2	3.4	100
3	3.4	100
4	3.4	100
5	6.8	200
6	6.8	200
7	6.8	200
8	6.8	200

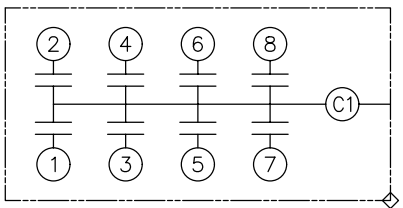

SCHEMATIC DIAGRAM - 806

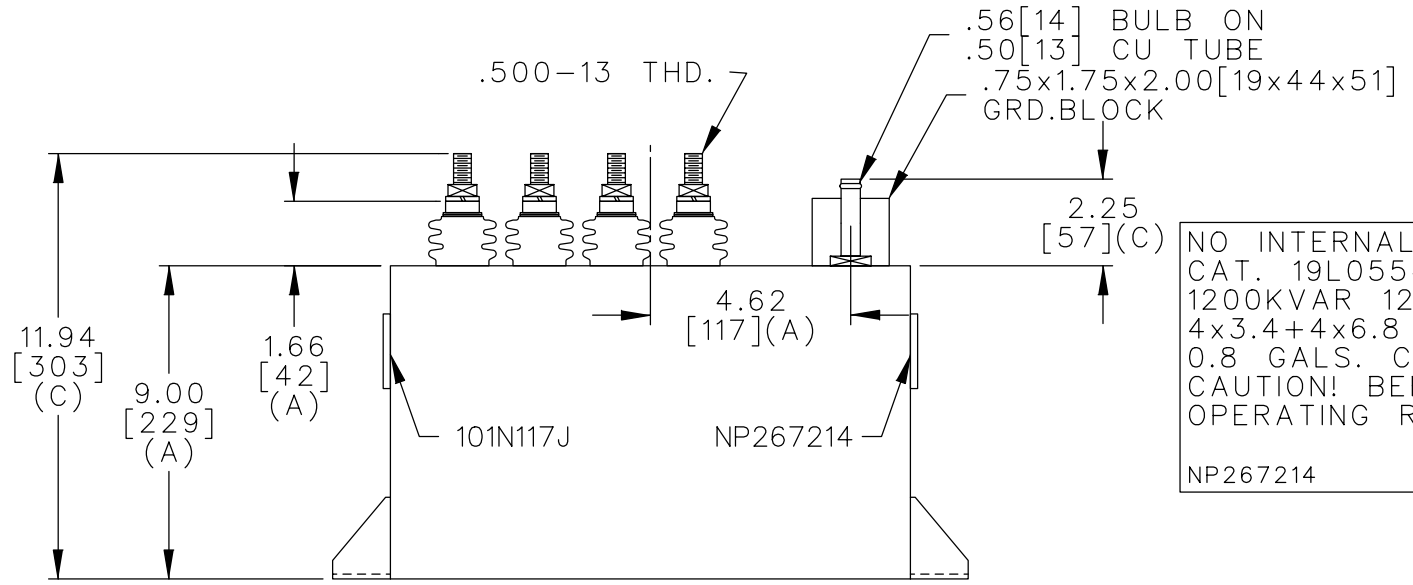

NO INTERNAL DISCH RESISTORS
 CAT. 19L0554WH3 SN
 1200KVAR 1250V 3000HZ 1PH
 4x3.4+4x6.8 UF/TAP
 0.8 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0554WH3		SHEET 2	CONT. ON -
	DRAWN E.McGINN	NOV. 18, 1996	SCALE				
ISSUED	11-20-96						

DISTR TO