

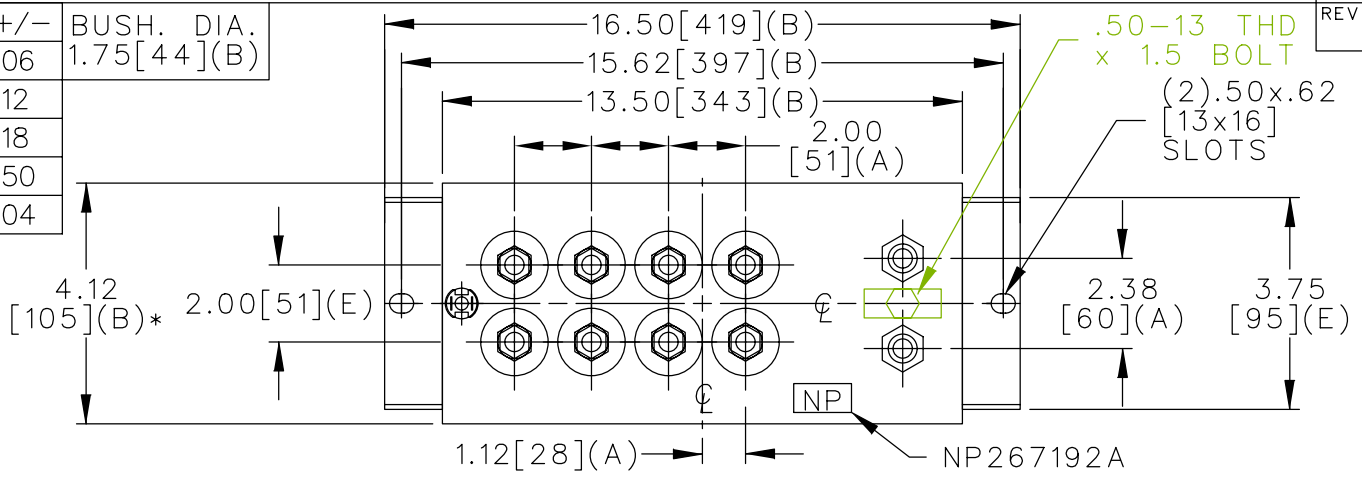


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

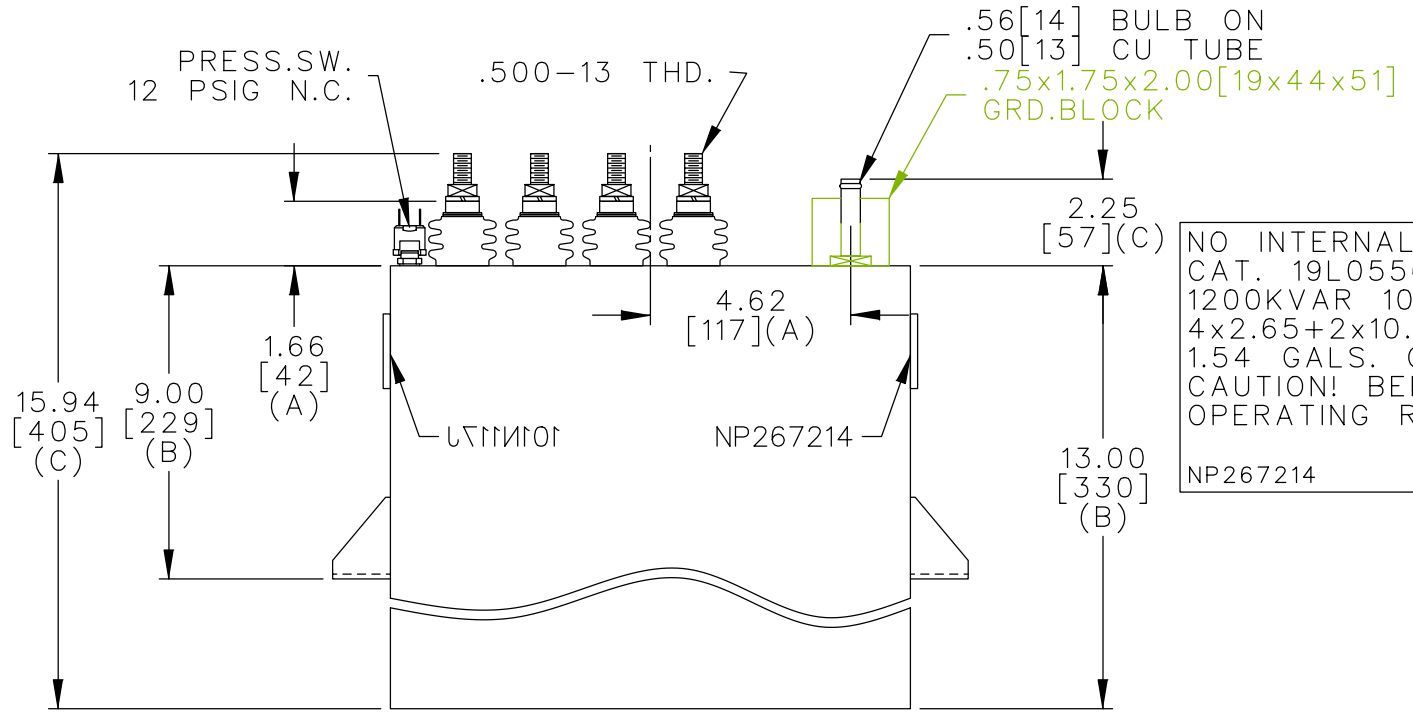

TERM	uF	kVAR
1	2.65	50
2	2.65	50
3	2.65	50
4	2.65	50
5	10.6	200
6	10.6	200
7	15.9	300
8	15.9	300

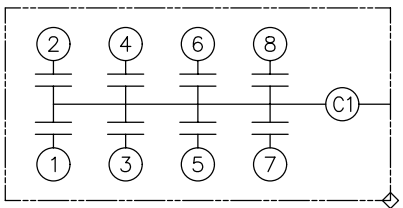

NO INTERNAL DISCH RESISTORS
 CAT. 19L0556WH4 SN
 1200KVAR 1000V 3000HZ 1PH
 4x2.65+2x10.6+2x15.9UF/TAP
 1.54 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0556WH4	
	DRAWN E.McGINN	MAY 9, 1997	SCALE		
ISSUED	5-14-97	SHEET 2	CONT. ON -	DISTR TO	