



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

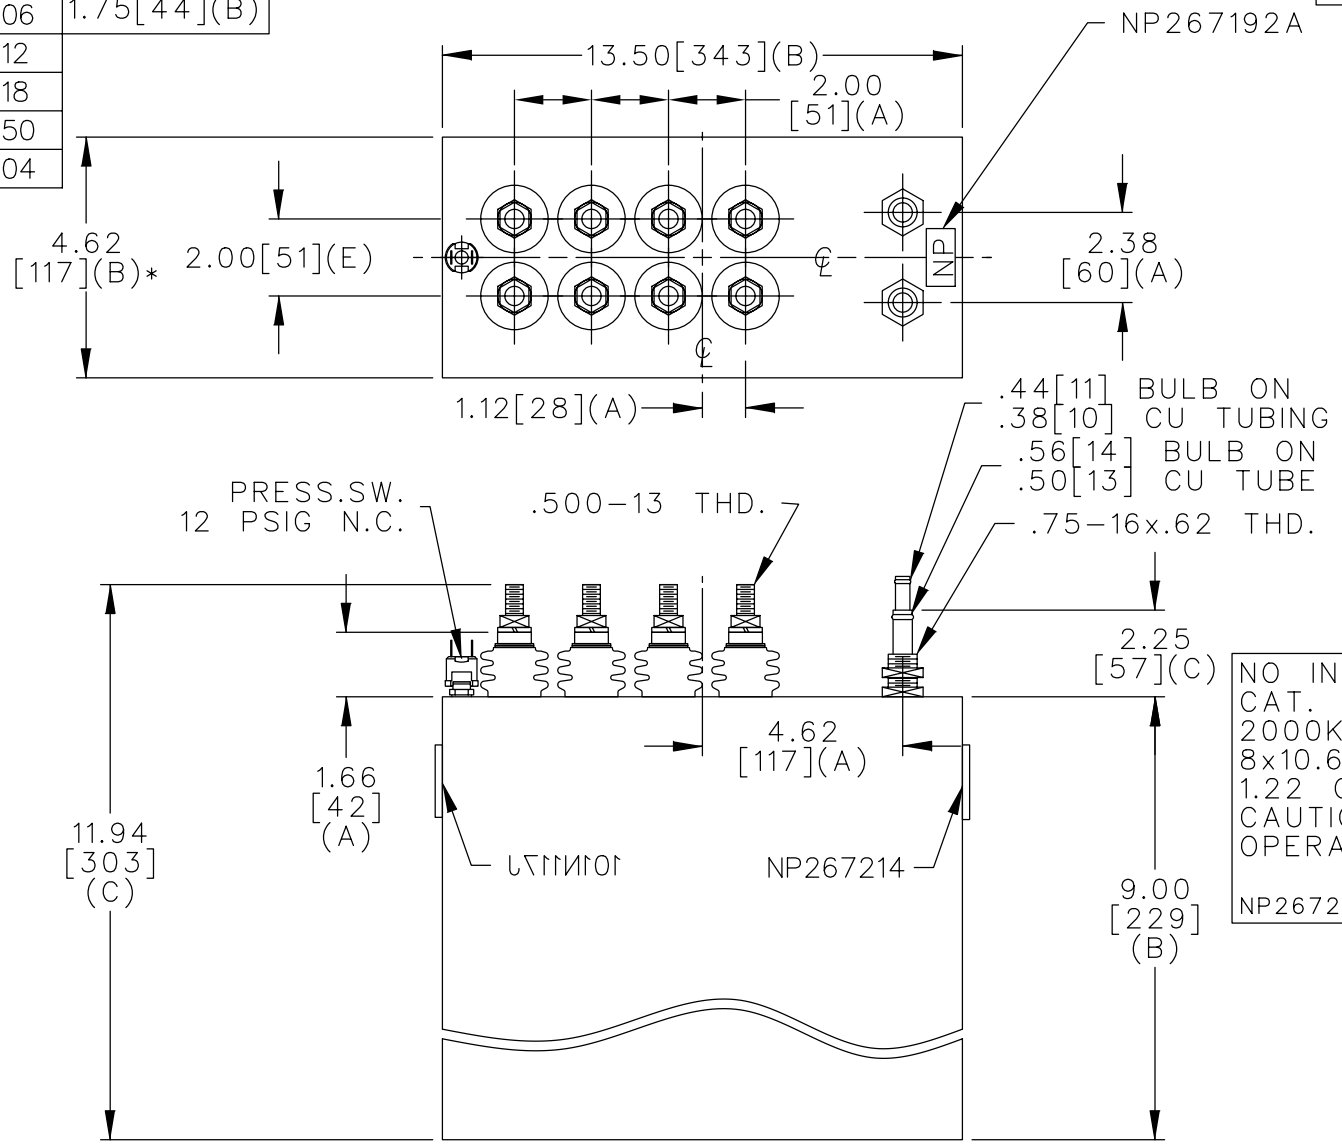

TERM	uF	kVAR
1	10.67	250
2	10.67	250
3	10.67	250
4	10.67	250
5	10.67	250
6	10.67	250
7	10.67	250
8	10.67	250

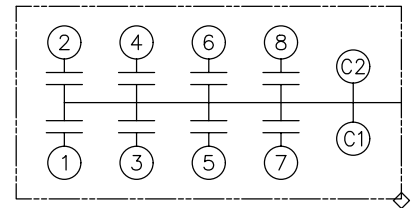

NO INTERNAL DISCH RESISTORS
 CAT. 19L0561WH2 SN
 2000KVAR 1175V 2700HZ 1PH
 8x10.67 UF/TAP
 1.22 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0561WH2	SHEET 2 CONT. ON -
	DRAWN E.McGINN	FEB. 6, 1998	SCALE		
ISSUED					

DISTR TO