




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

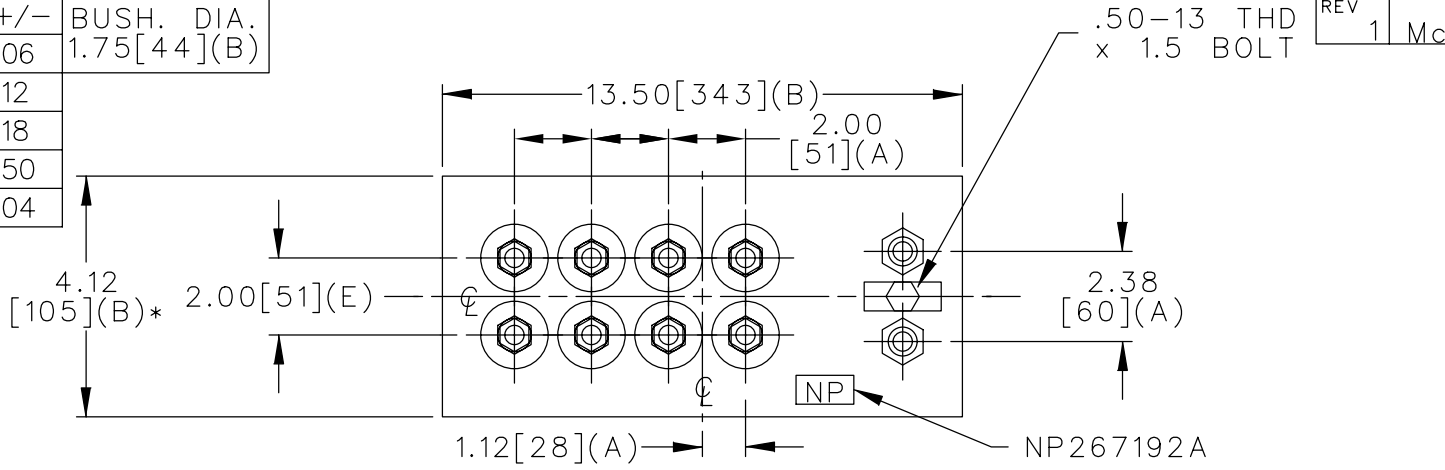

TERM	uF	kVAR
1	1.70	50
2	1.70	50
3	1.70	50
4	1.70	50
5	6.79	200
6	6.79	200
7	10.18	300
8	10.18	300

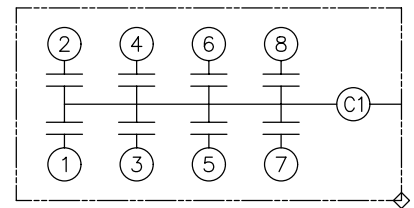

SCHEMATIC DIAGRAM - 806

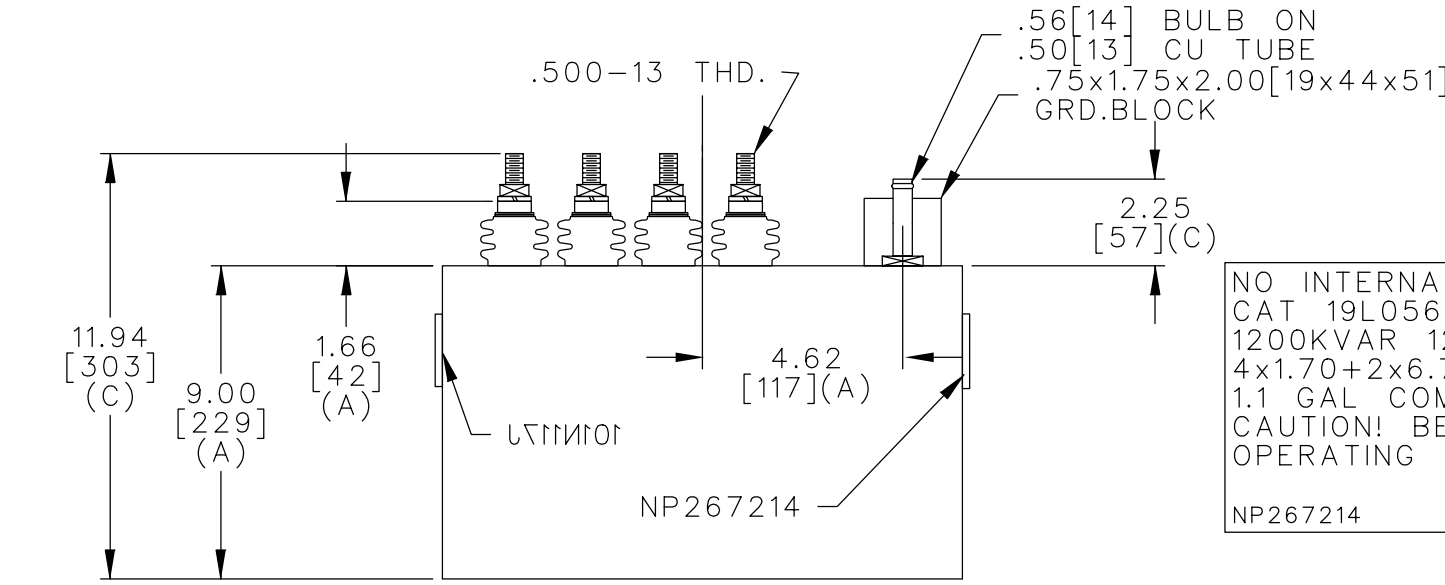

.56[14] BULB ON
.50[13] CU TUBE
.75x1.75x2.00[19x44x51]
GRD.BLOCK

NO INTERNAL DISCH RESISTORS
CAT 19L0562WH1 SN
1200KVAR 1250V 3000HZ 1PH
4x1.70+2x6.79+2x10.18 UF/TAP
1.1 GAL COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733
NP267214

* UP TO +.50[13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0562WH1		SHEET 2	CONT. ON -
	DRAWN E.McGINN	SEPT. 25, 1998	SCALE				
ISSUED	9-30-98						

DISTR TO