



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

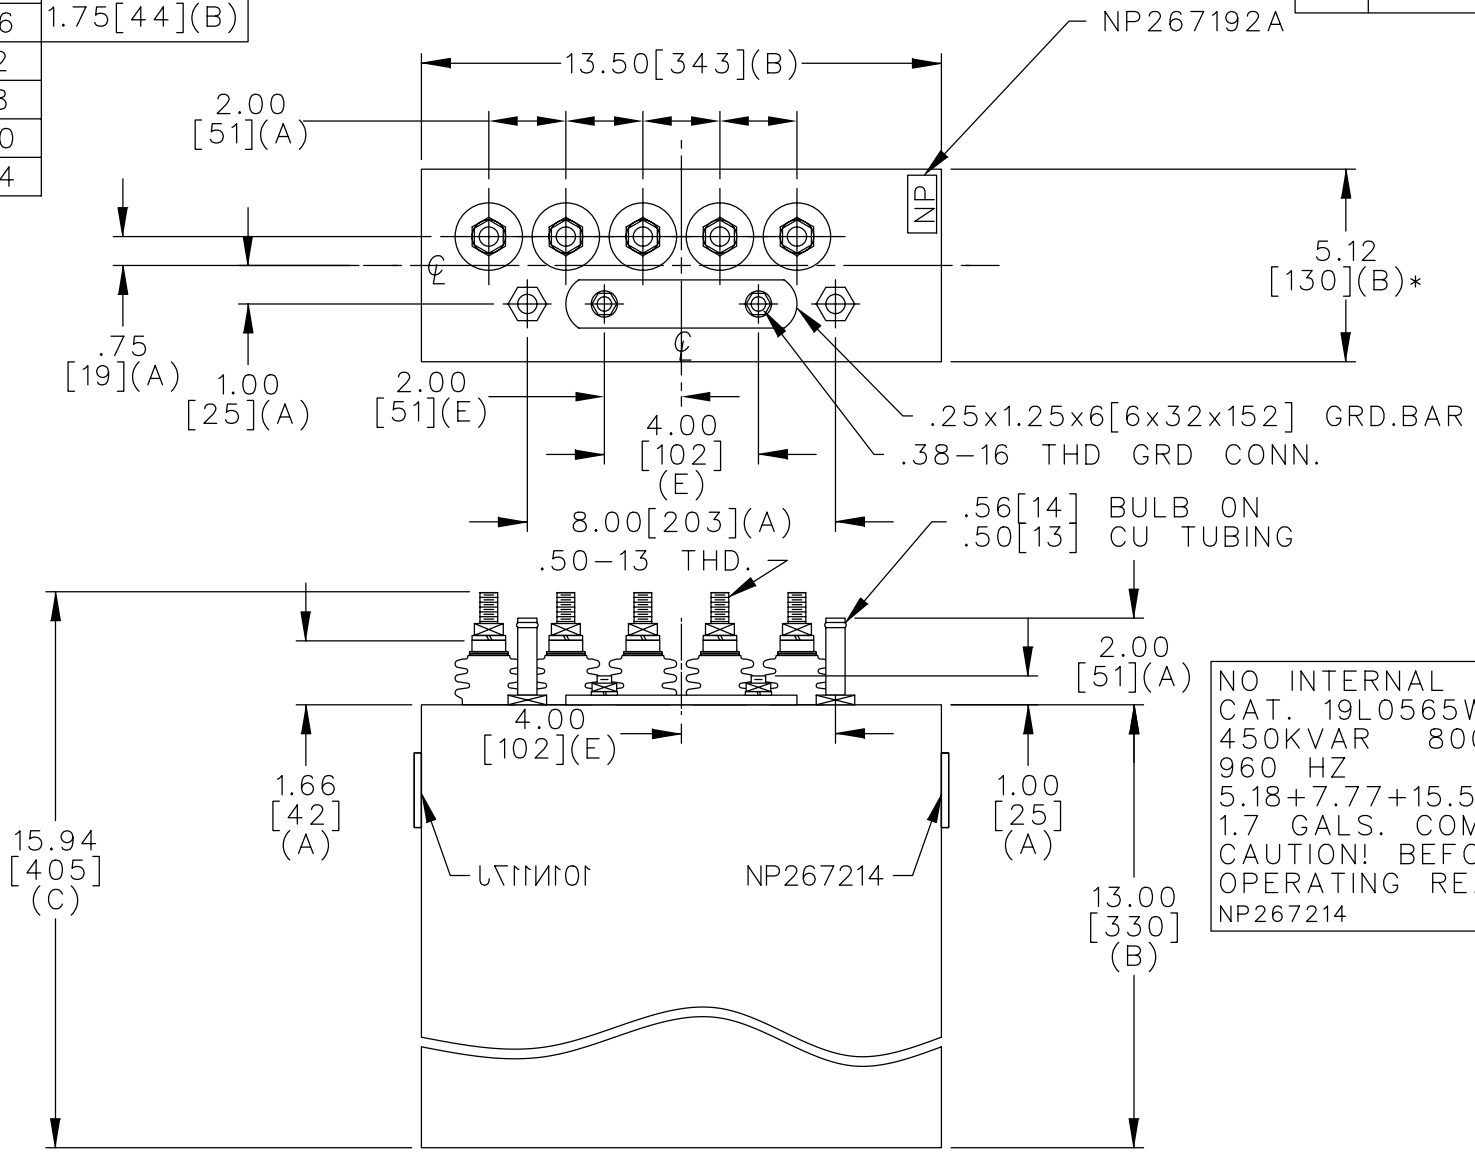

TERM	uF	kVAR
1	5.18	20
2	7.77	30
3	15.54	60
4	44.04	170
5	44.04	170

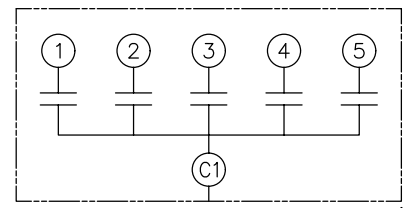

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS
 CAT. 19L0565WH1 SN
 450KVAR 800V 1PH
 960 HZ
 5.18+7.77+15.54+2x44.0 UF/TAP
 1.7 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0565WH1	
	DRAWN E.McGINN	JUNE 28, 2001	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO