



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

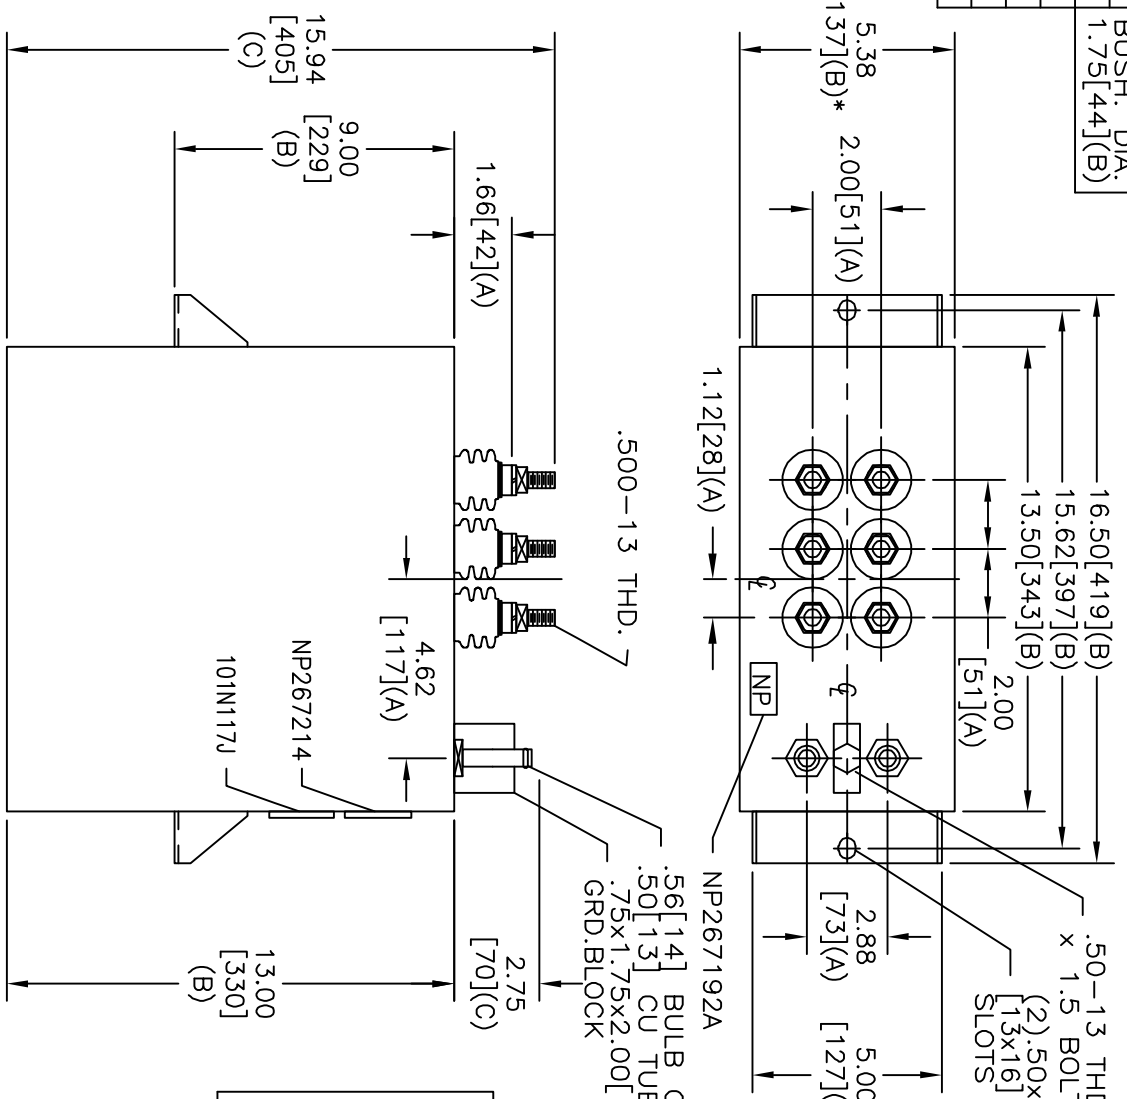

SIZE	DWG NO	SHT	REV
A	19L0566WH3	2	1
REV	DESCRIPTION	DATE	APPROVED
1	UPDATE CAT NO	8/25/04	BTR

TERM	UF	KVAR
1	17	200
2	17	200
3	17	200
4	17	200
5	17	200
6	17	200

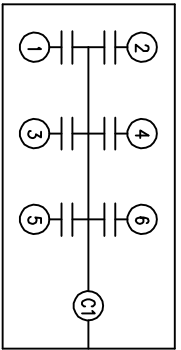

SCHEMATIC DIAGRAM - 606

NO INTERNAL DISCH RESISTORS
 CAT. 19L0566WH3 SN
 1200KVAR 1250V 1200HZ 1PH
 6x17 UF/TAP
 2.7 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. McGinn
 DATE NOV 18, 1996

ISSUED
 DATE 11-20-96

SIZE **A**

SCALE

OUTLINE
19L0566WH3

SHEET 2 CONT -

DISTR. TO