

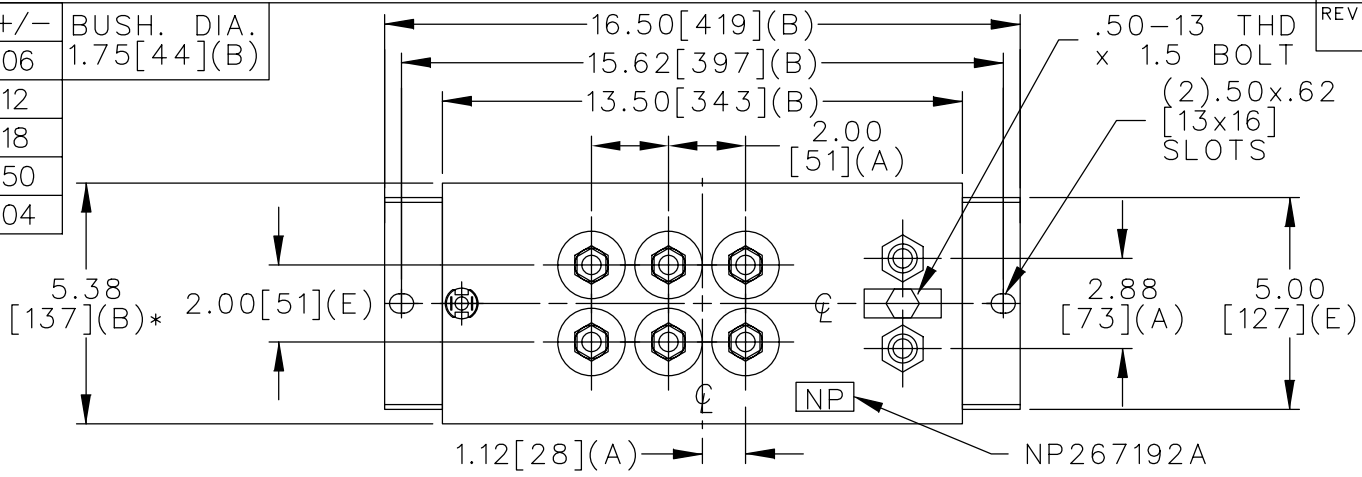


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

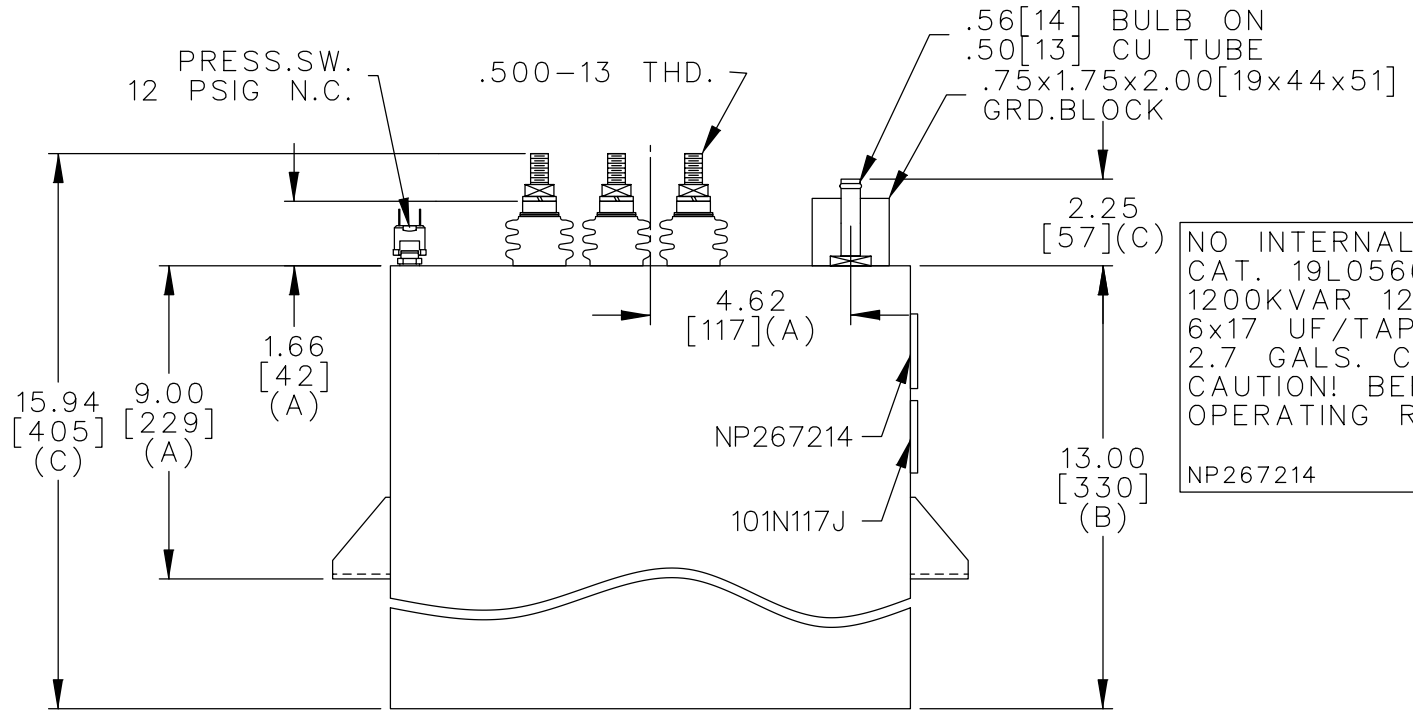

TERM	uF	kVAR
1	17	200
2	17	200
3	17	200
4	17	200
5	17	200
6	17	200

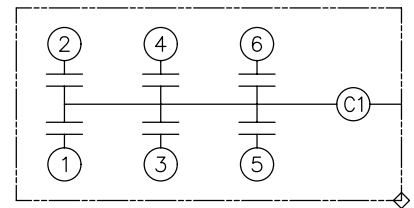

NO INTERNAL DISCH RESISTORS
CAT. 19L0566WH4 SN
1200KVAR 1250V 1200HZ 1PH
6x17 UF/TAP
2.7 GALS. COMBUSTIBLE LIQUID
CAUTION! BEFORE INSTALLING OR
OPERATING READ GEH-2733
NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0566WH4	
	DRAWN E.McGINN	NOV. 18, 1996	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO