

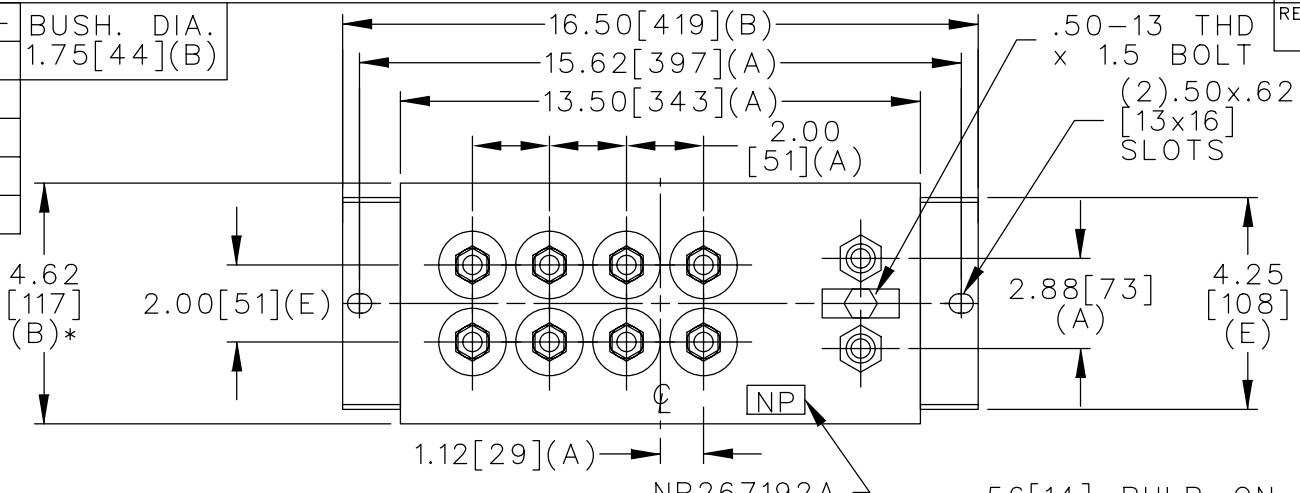


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

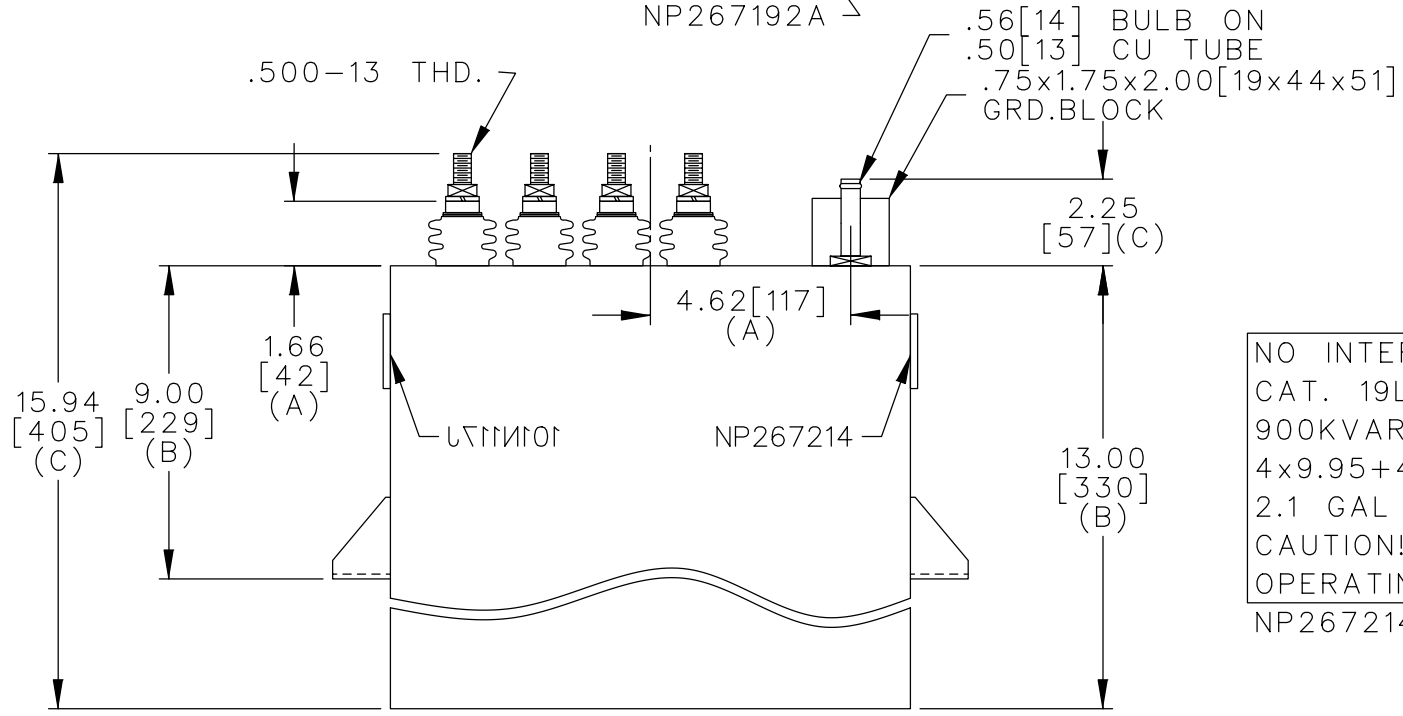

TERM	uF
1	9.95
2	9.95
3	9.95
4	9.95
5	19.89
6	19.89
7	19.89
8	19.89

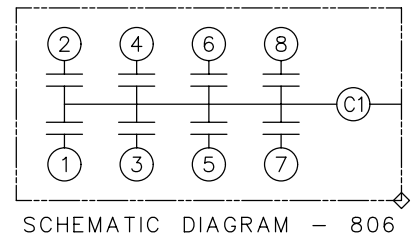

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0567WH3 SN  
 900KVAR 1000V 1200HZ 1PH  
 4x9.95+4x19.9 UF/TAP  
 2.1 GAL COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	UNIT WEIGHT 42/19 LB/KG	<b>OUTLINE</b> <b>19L0567WH3</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	AUG. 20, 1997	SCALE	DISTR TO		
ISSUED	8-27-97					