

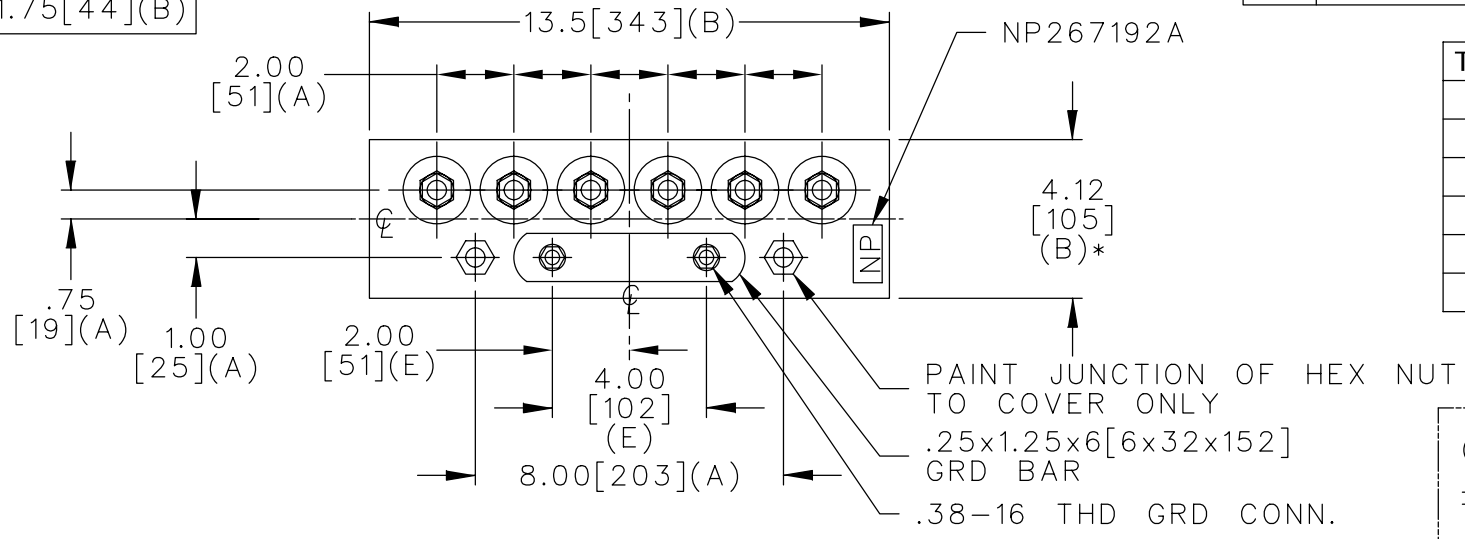


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

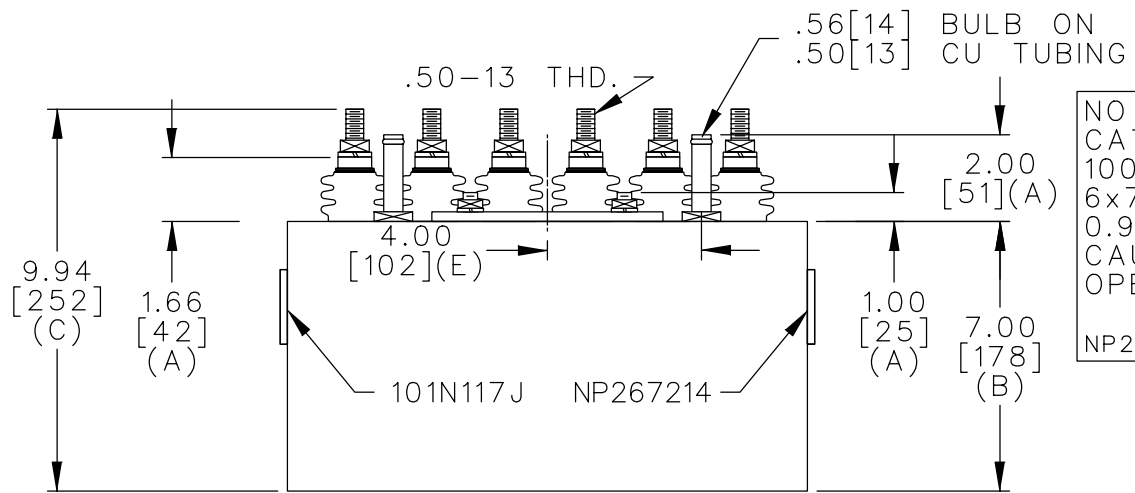

TERM	uF	kVAR
1	7.368	166.7
2	7.368	166.7
3	7.368	166.7
4	7.368	166.7
5	7.368	166.7
6	7.368	166.7

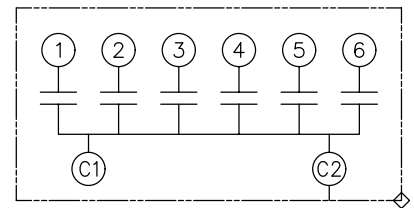

NO INTERNAL DISCH RESISTORS
 CAT. 19L0571WH1 SN
 1000KVAR 600V 10000HZ 1PH
 6x7.368UF/TAP
 0.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	24/11 LB / KG	OUTLINE 19L0571WH1	SHEET 2 CONT. ON -
	DRAWN E.McGINN	AUG. 26, 1999	SCALE	DISTR TO		