



TOL	+/-	BUSH. DIA.
A	.06	1.75(B)
B	.12	
C	.18	
D	.50	
E	.04	

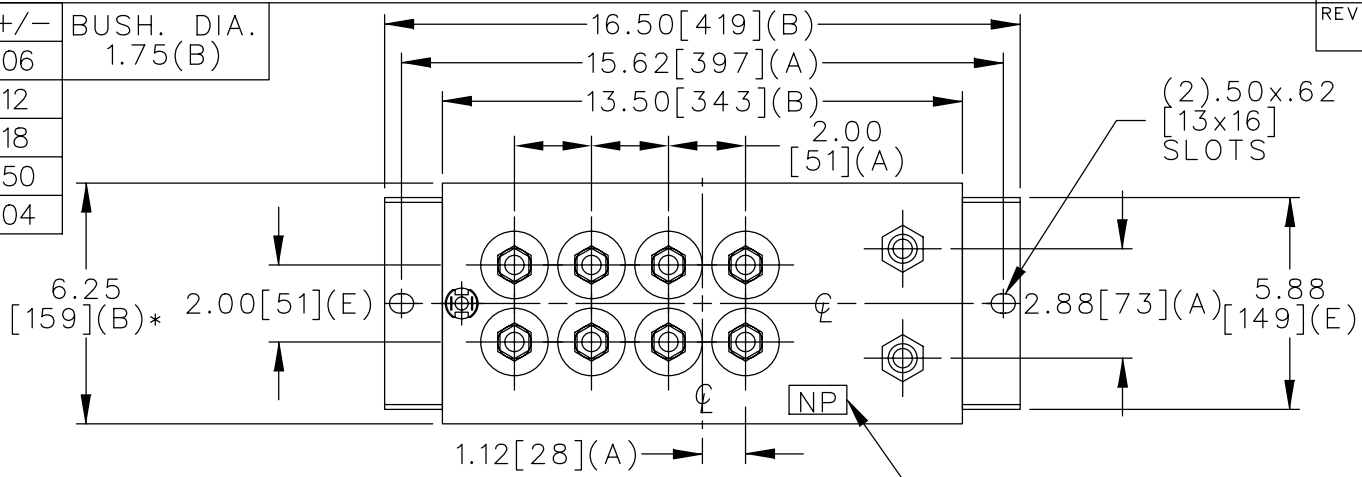

TERM	uF	kVAR
1	22.1	375
2	22.1	375
3	22.1	375
4	22.1	375
5	22.1	375
6	22.1	375
7	22.1	375
8	22.1	375

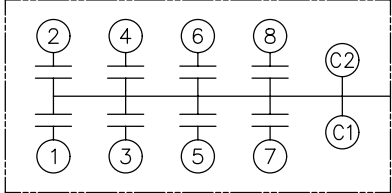


SCHEMATIC DIAGRAM - 801

PRESS.SW.
12 PSIG N.C.

.500-13 THD.

.56 [14] BULB ON
.50 [13] CU TUBE

.75-16 THD.

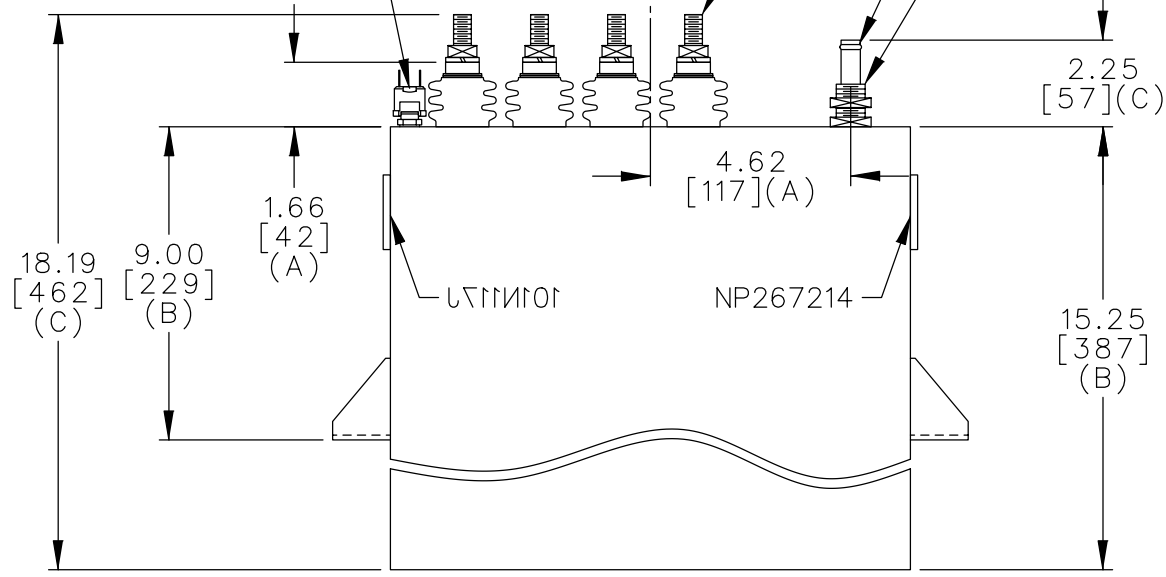

NO INTERNAL DISCH RESISTORS
 CAT. 19L0573WH4 SN
 3000KVAR 1500V 1200HZ 1PH
 8x22.1 UF/TAP
 2.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50 [13]
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0573WH4	
	DRAWN E.MCGINN	MAY 13, 1997	SCALE		
ISSUED	5-14-97		SHEET 2	CONT. ON -	DISTR TO