



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

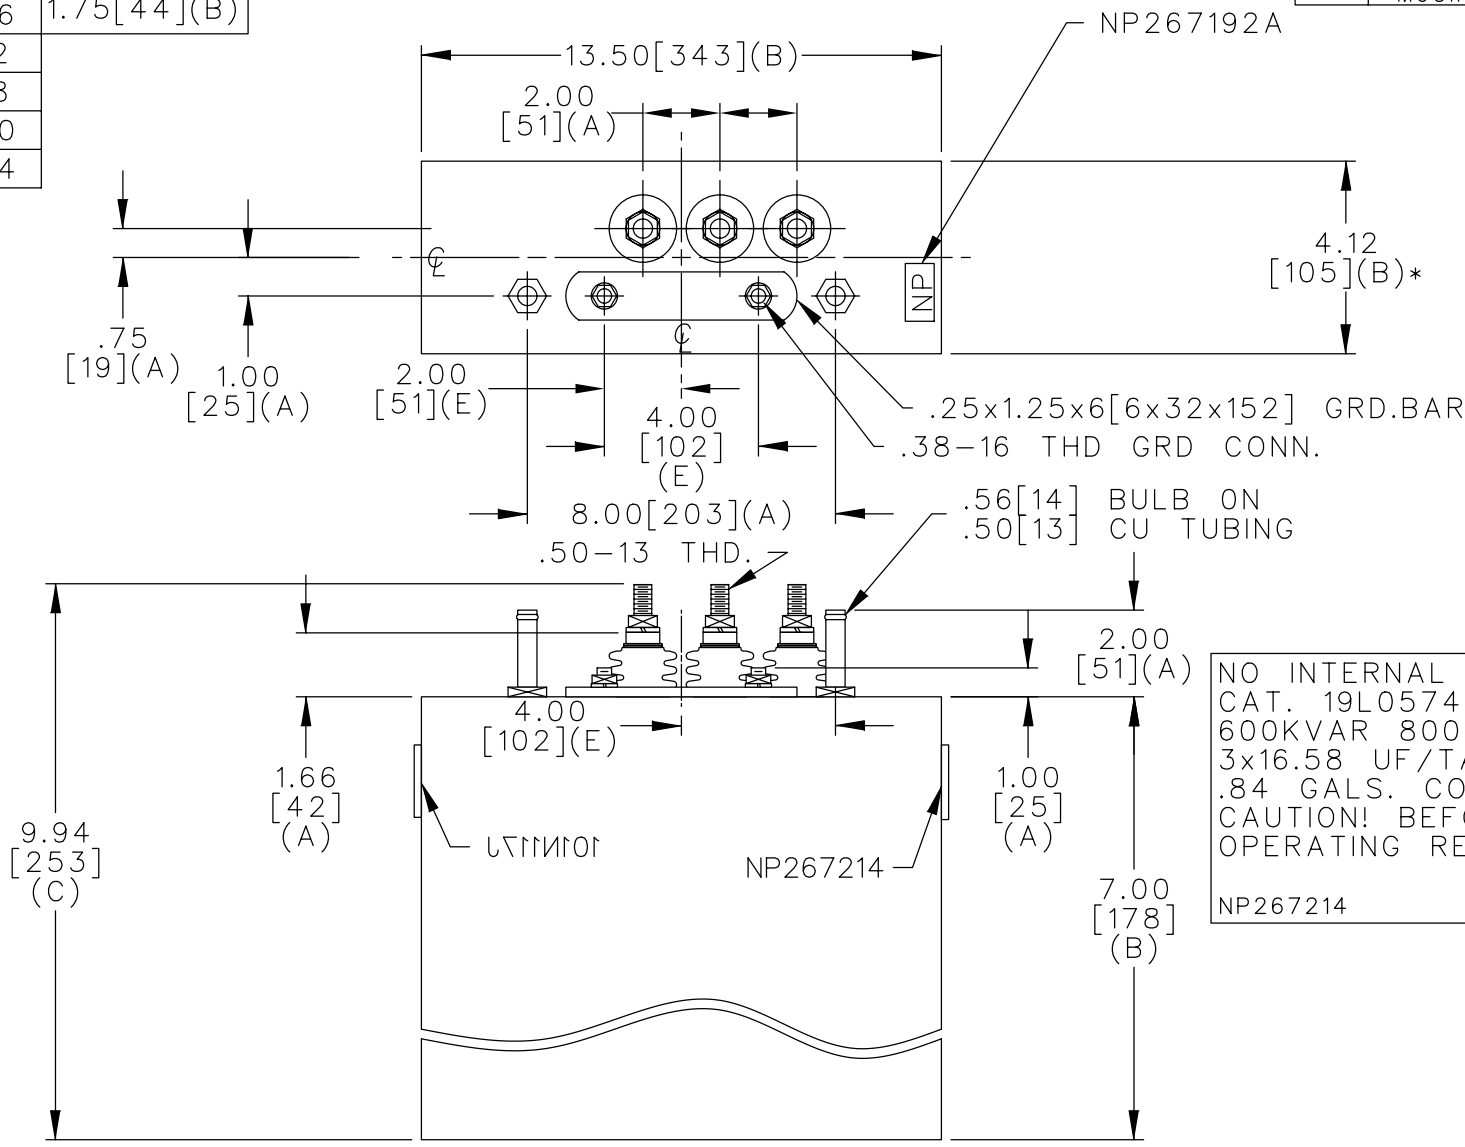

TERM	uF	kVAR
1	16.58	200
2	16.58	200
3	16.58	200

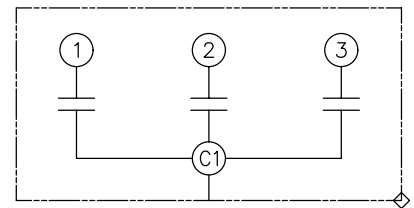

NO INTERNAL DISCH RESISTORS
 CAT. 19L0574WH1 SN
 600KVAR 800V 3000HZ 1PH
 3x16.58 UF/TAP
 .84 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
	DRAWN E.McGINN	SEPT. 12, 1997
ISSUED	9-17-97	

SIZE	A
SCALE	

OUTLINE 19L0574WH1				
SHEET	2	CONT.	ON	-

DISTR TO