




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

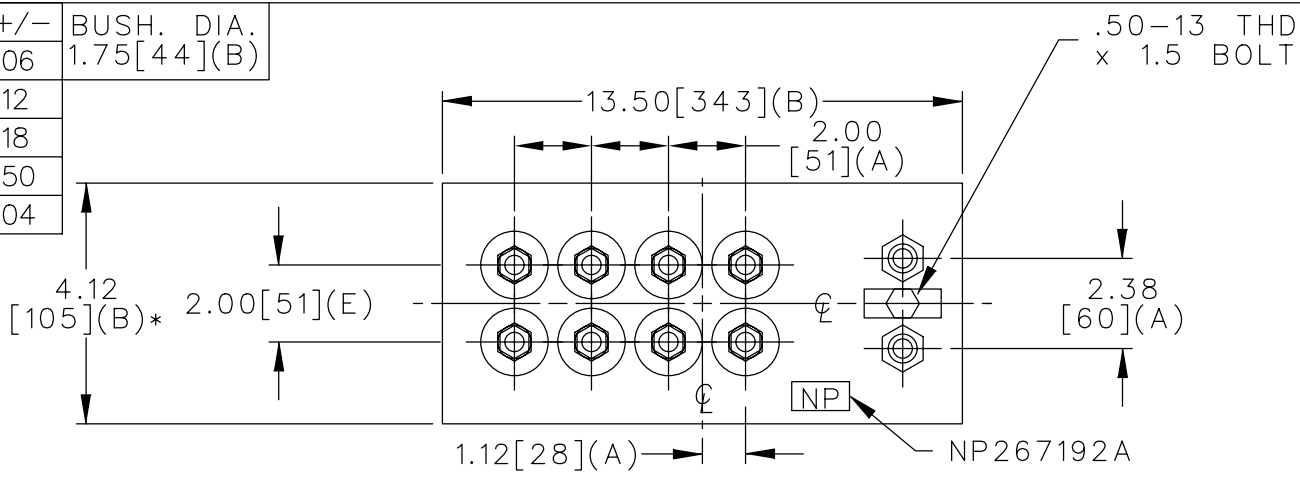

TERM	uF	kVAR
1	3.18	31.25
2	3.18	31.25
3	3.18	31.25
4	3.18	31.25
5	12.7	125.0
6	12.7	125.0
7	19.1	187.5
8	19.1	187.5

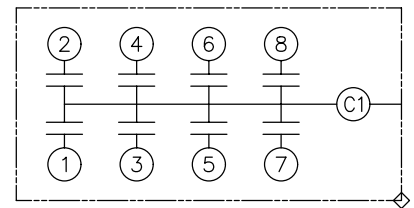

SCHEMATIC DIAGRAM - 806

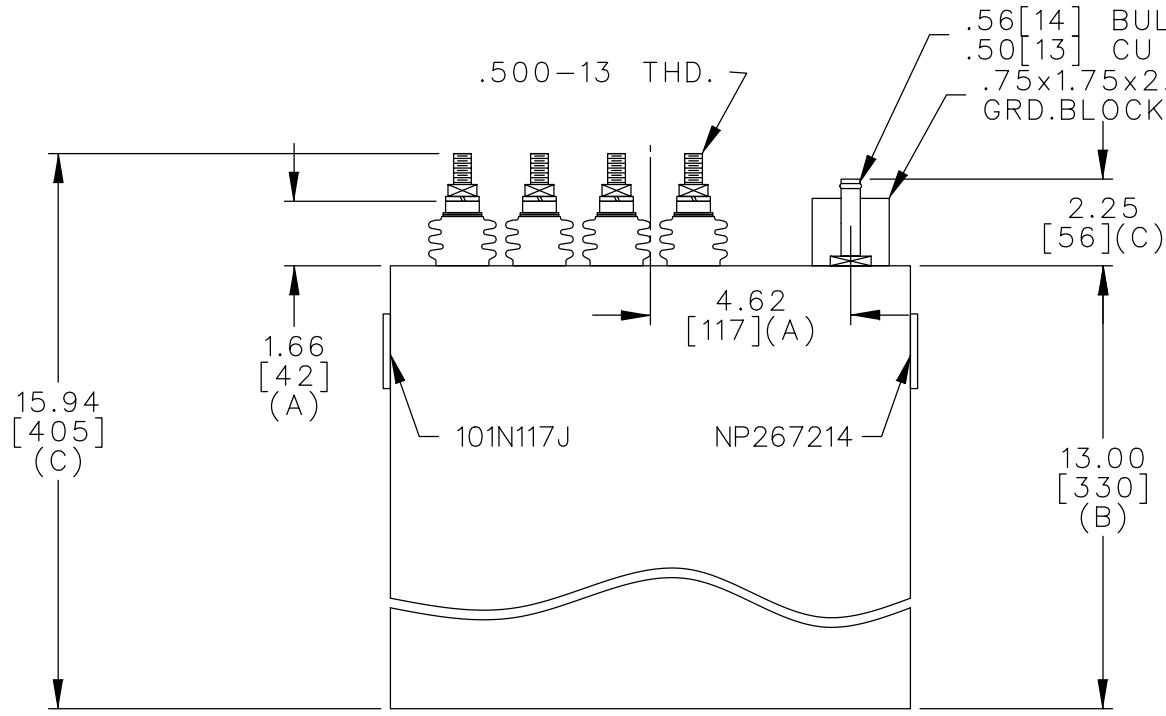

NO INTERNAL DISCH RESISTORS
 CAT. 19L0575WH1 SN
 750KVAR 1250V 1000HZ 1PH
 4x3.18+2x12.7+2x19.1 UF/TAP
 1.5 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0575WH1</h2>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JUNE 15, 2001	SCALE		
ISSUED					