
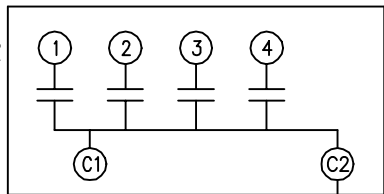


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

SIZE A	DWG NO 19L0577WH1	SHT 2	REV 2
REV 2	DESCRIPTION CHANGE NAMEPLATE	DATE 7/30/03	APPROVED BTR

TERM	uF
1	10
2	10
3	30
4	110

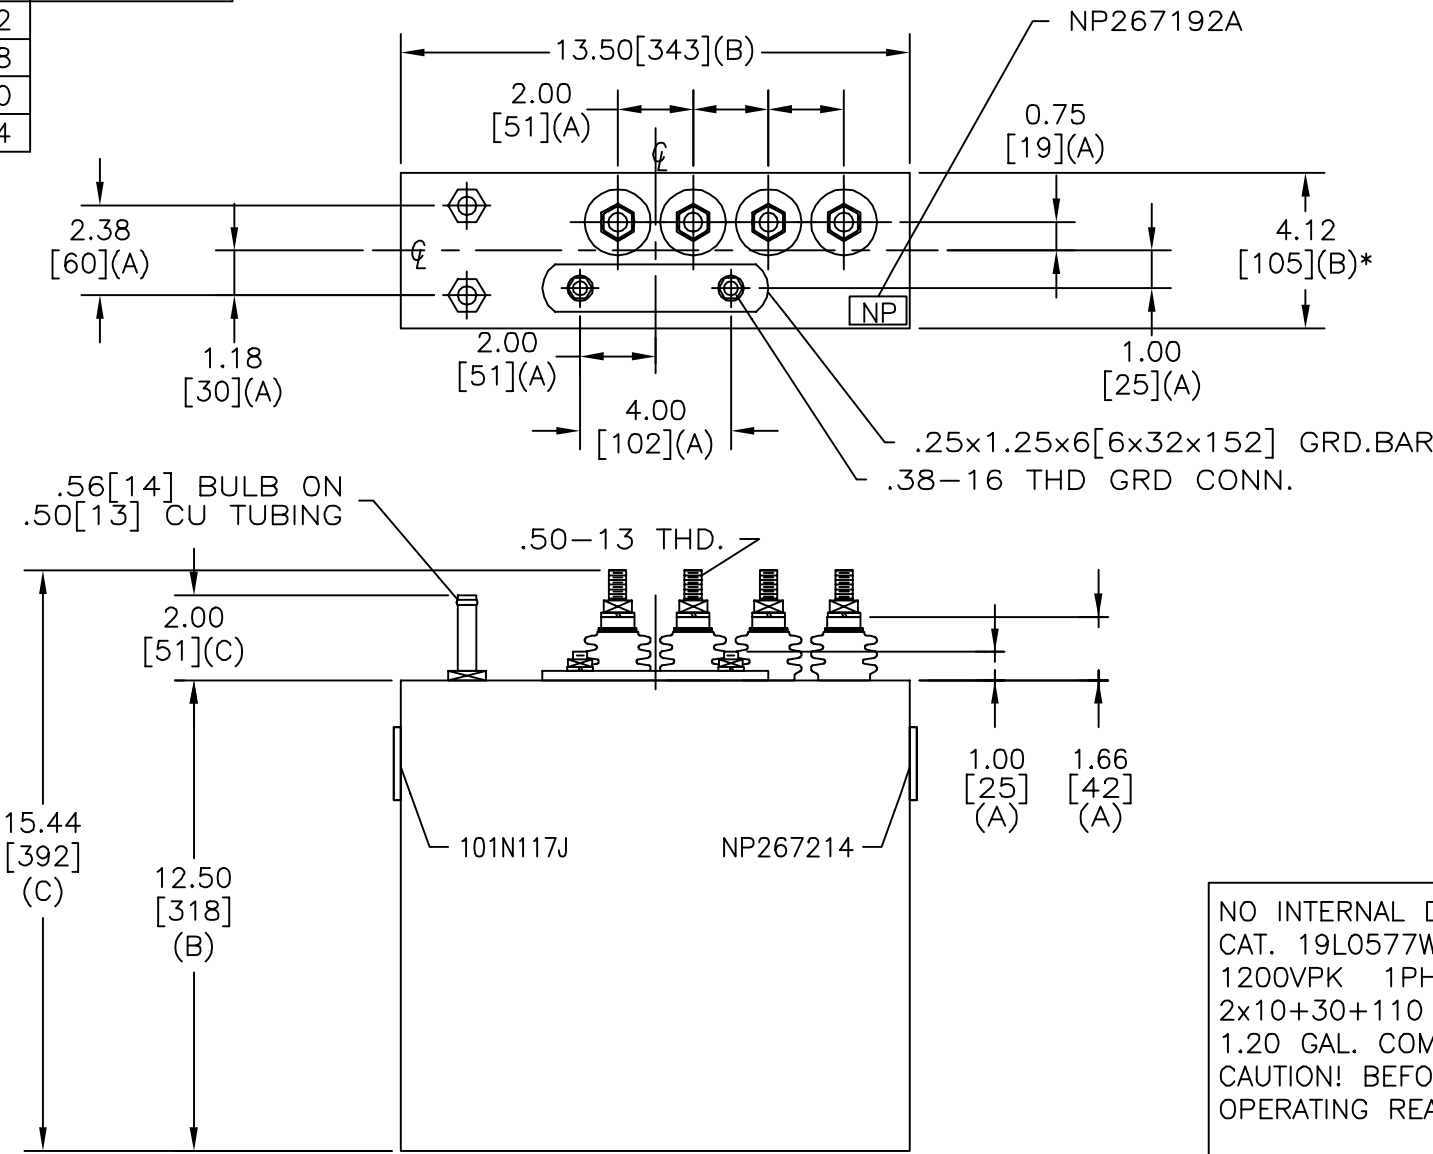

SCHEMATIC DIAGRAM - 436

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0577WH1 SN  
 1200VPK 1PH  
 2x10+30+110 UF/TAP  
 1.20 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

\* UP TO +.50 [13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN E. McGinn	DATE JUN 8, 1998	SCALE
ISSUED	DATE 6/10/98	

OUTLINE  
 19L0577WH1

SHEET 2 CONT ON 3

DISTR. TO