



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

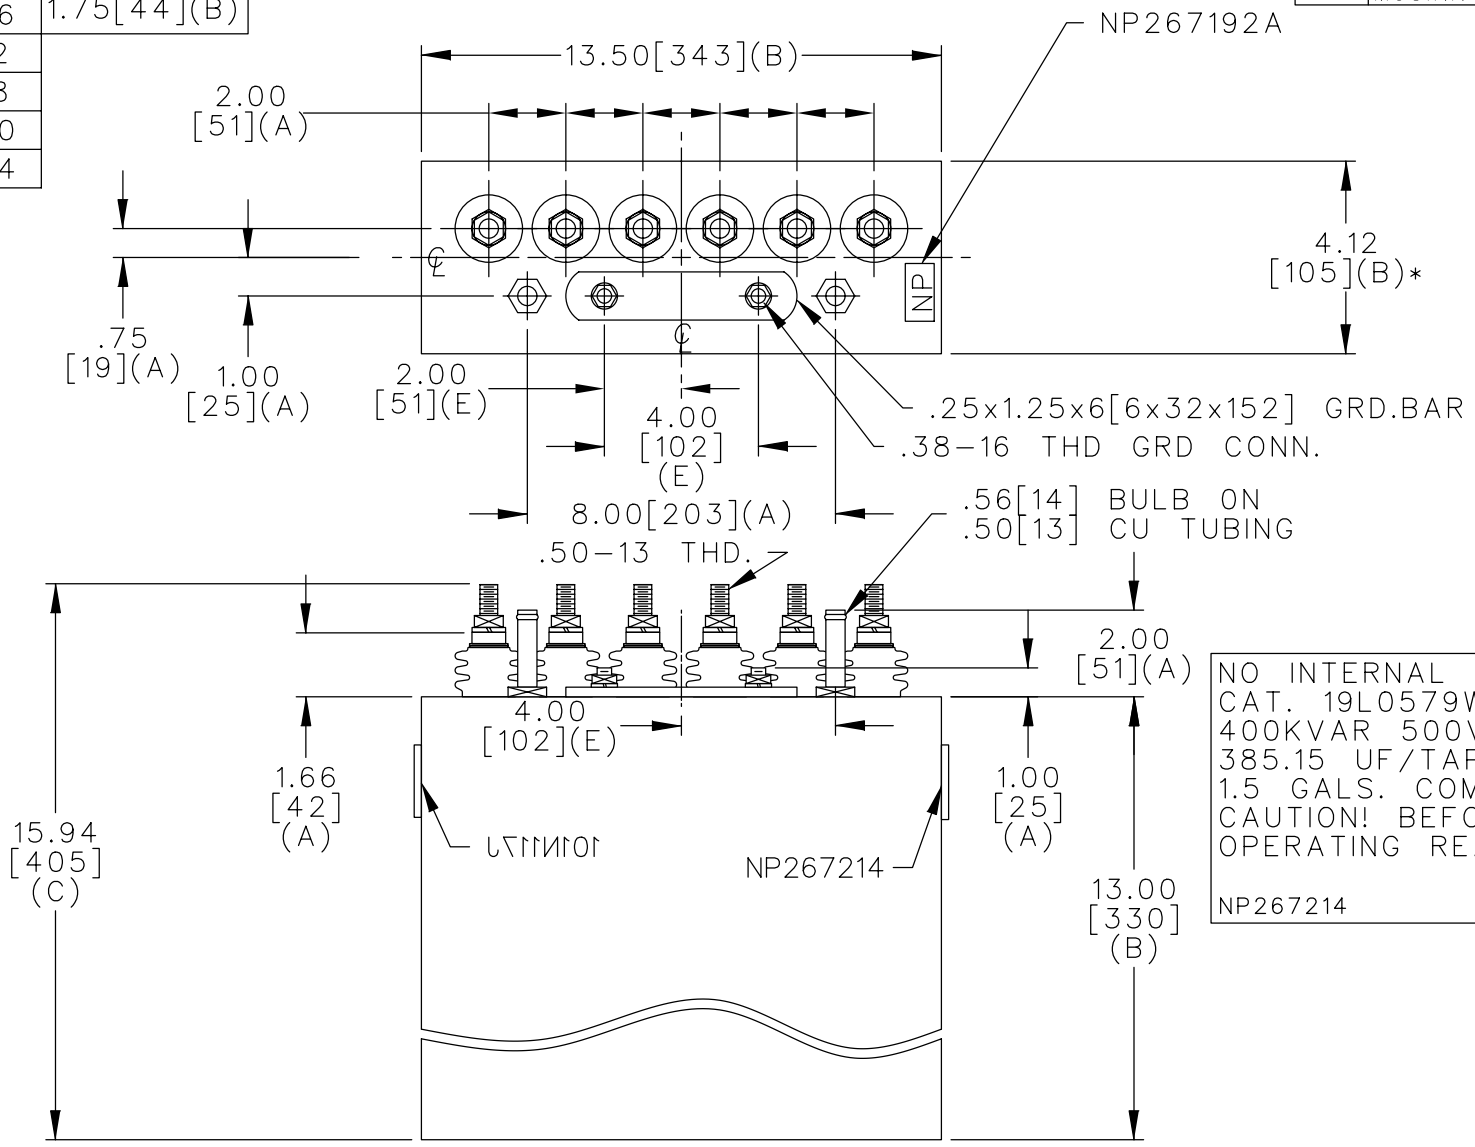

TERM	uF	kVAR
1	2.33	11
2	4.67	22
3	4.67	22
4	24.4	115
5	24.4	115
6	24.4	115

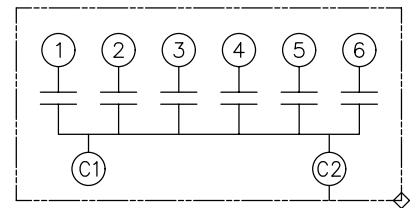

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0579WH1 SN  
 400KVAR 500V 3000HZ 1PH  
 385.15 UF/TAP  
 1.5 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<b>OUTLINE</b> <b>19L0579WH1</b>	SHEET 2 CONT. ON -
	DRAWN E.McGINN	FEB. 13, 1997			
ISSUED	2-19-97	DISTR TO			