



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

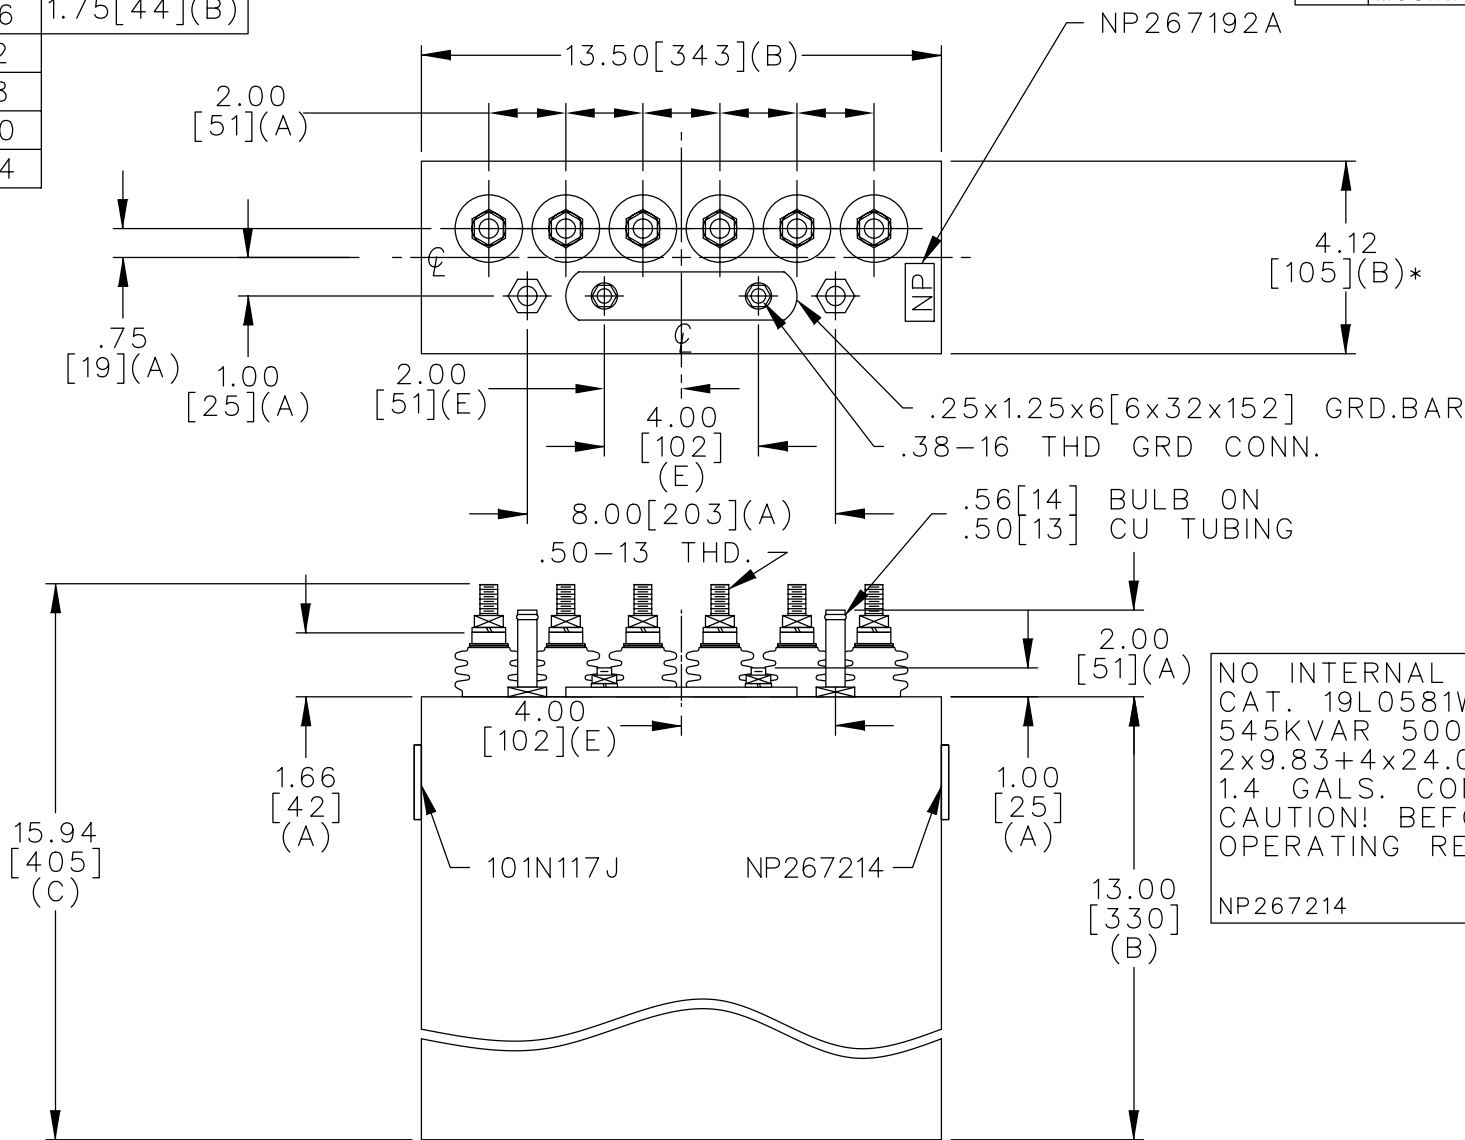

TERM	uF	kVAR
1	9.83	45
2	9.83	45
3	24.0	113
4	24.0	113
5	24.0	113
6	24.0	113

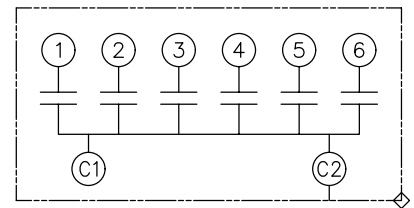

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0581WH1 SN  
 545KVAR 500V 3000HZ 1PH  
 2x9.83+4x24.0 UF/TAP  
 1.4 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE <b>A</b>	<h1>OUTLINE</h1> <h2>19L0581WH1</h2>	
	DRAWN E.McGINN	JAN. 14, 1997	SCALE		
ISSUED	1-15-97		SHEET 2	CONT. ON -	DISTR TO