



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

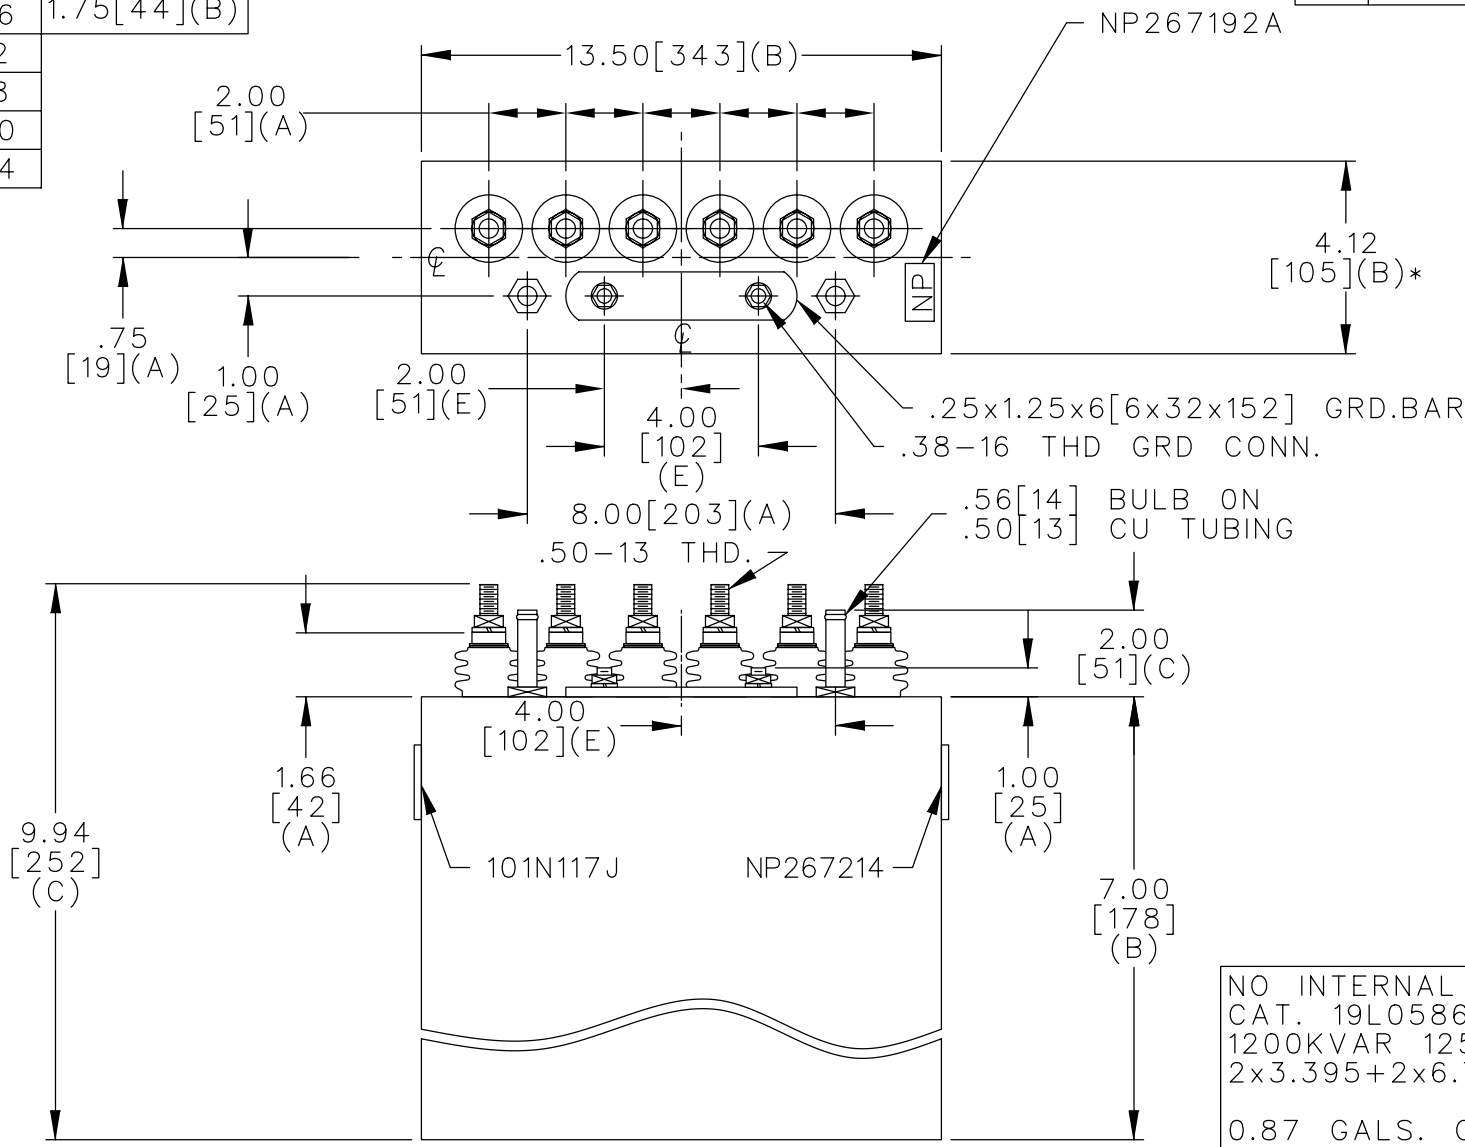

TERM	uF	kVAR
1	3.395	100
2	3.395	100
3	6.79	200
4	6.79	200
5	10.19	300
6	10.19	300

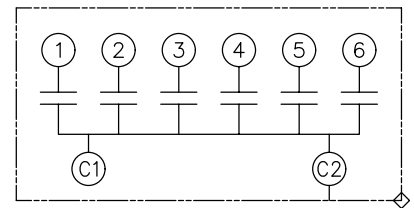

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0586WH1 SN  
 1200KVAR 1250V 3000HZ 1PH  
 2x3.395+2x6.79+2x10.19 UF/TAP

0.87 GALS. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733  
 NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.	
	DRAWN E.McGINN	JUNE 8, 1998
ISSUED	SCALE	

SIZE <b>A</b>
SCALE

<h1>OUTLINE</h1> <h2>19L0586WH1</h2>	
SHEET 2	CONT. ON -

DISTR TO