



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

SIZE A	DWG NO 19L0587WH1	SHT 2	REV
REV	DESCRIPTION	DATE	APPROVED

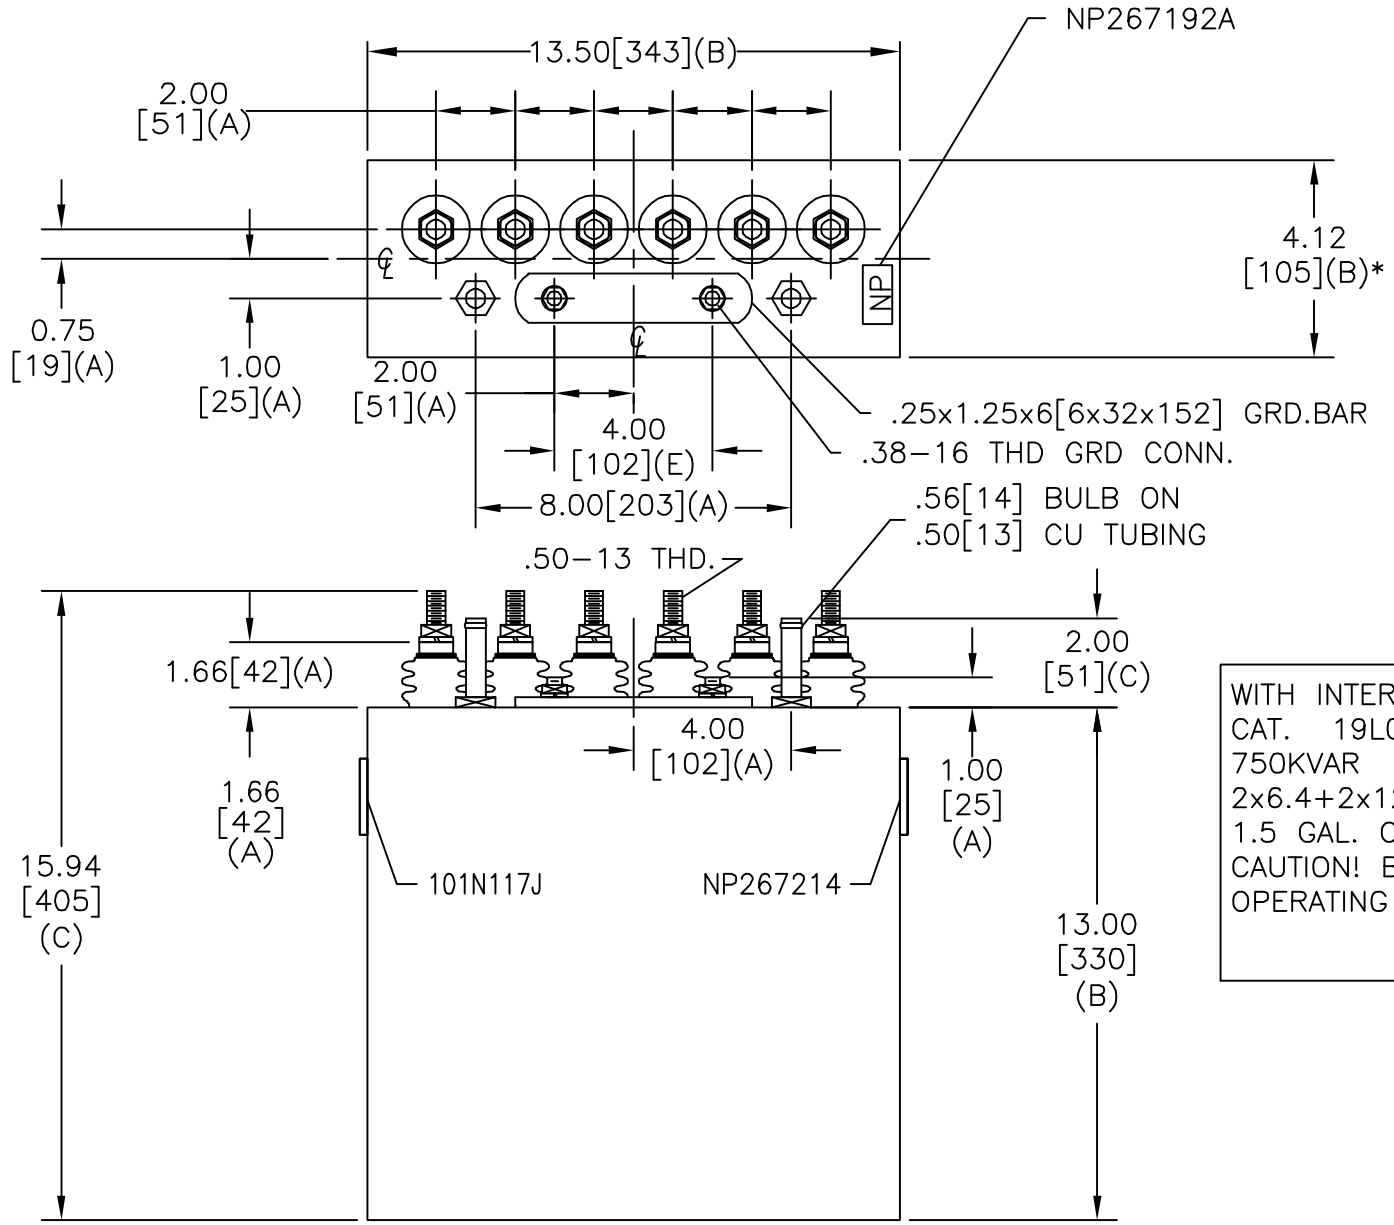

TERM	uF	kVAR
1	6.4	62.5
2	6.4	62.5
3	12.7	125
4	12.7	125
5	19.1	187.5
6	19.1	187.5

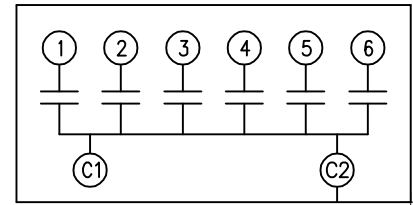

SCHEMATIC DIAGRAM - 601

WITH INTERNAL DISCH RESISTORS  
 CAT. 19L0587WH1 SN  
 750KVAR 1250V 1000HZ 1PH  
 2x6.4+2x12.7+2x19.1 UF/TAP  
 1.5 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

\* UP TO +.50[13]  
CASE BULGE

MAX. TERMINAL  
TIGHTENING TORQUE  
15 FT-LBS

NP267192A

	INDUSTRIAL SYSTEMS FORT EDWARD, N.Y., U.S.A.	
	DRAWN E. McGinn	DATE DEC 20, 1996
ISSUED	DATE	SCALE

SIZE A
SCALE

OUTLINE 19L0587WH1	
SHEET 2	CONT ON -

DISTR. TO