

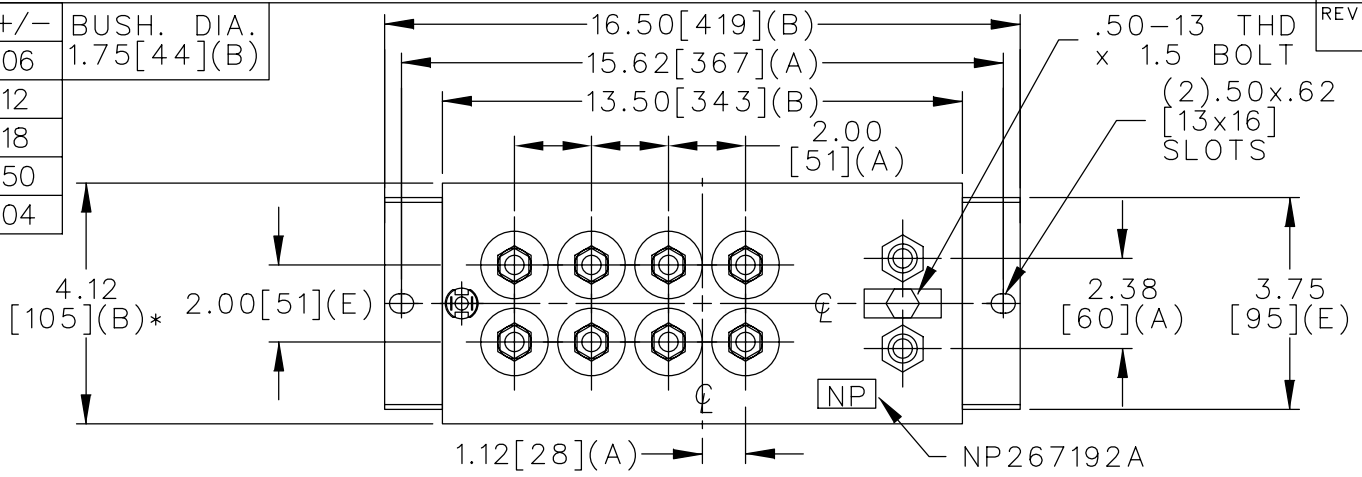


TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

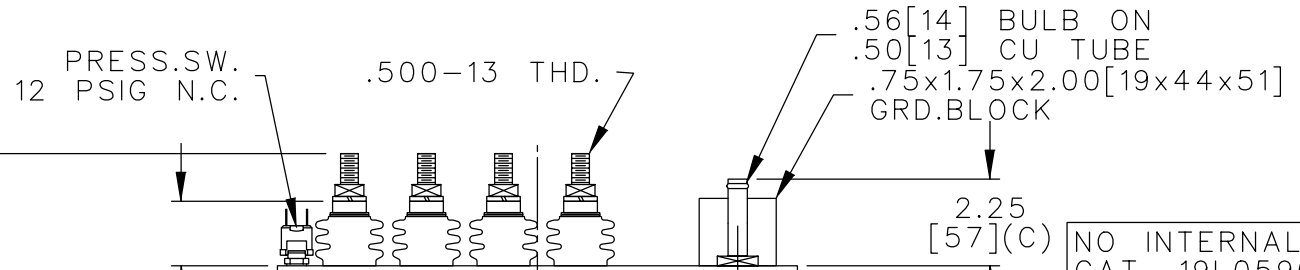

TERM	uF	kVAR
1	0.69	65
2	0.69	65
3	0.69	65
4	0.69	65
5	2.65	250
6	2.65	250
7	2.65	250
8	2.65	250

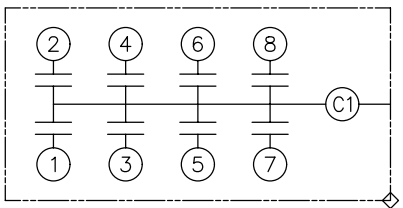

NO INTERNAL DISCH RESISTORS
 CAT. 19L0590WH4 SN
 1260KVAR 1250V 9600HZ 1PH
 4x.69+4x2.65 UF/TAP
 1.15 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0590WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	MAY 30, 1997	SCALE		
ISSUED	6-4-94	NP267214	DISTR TO		