



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

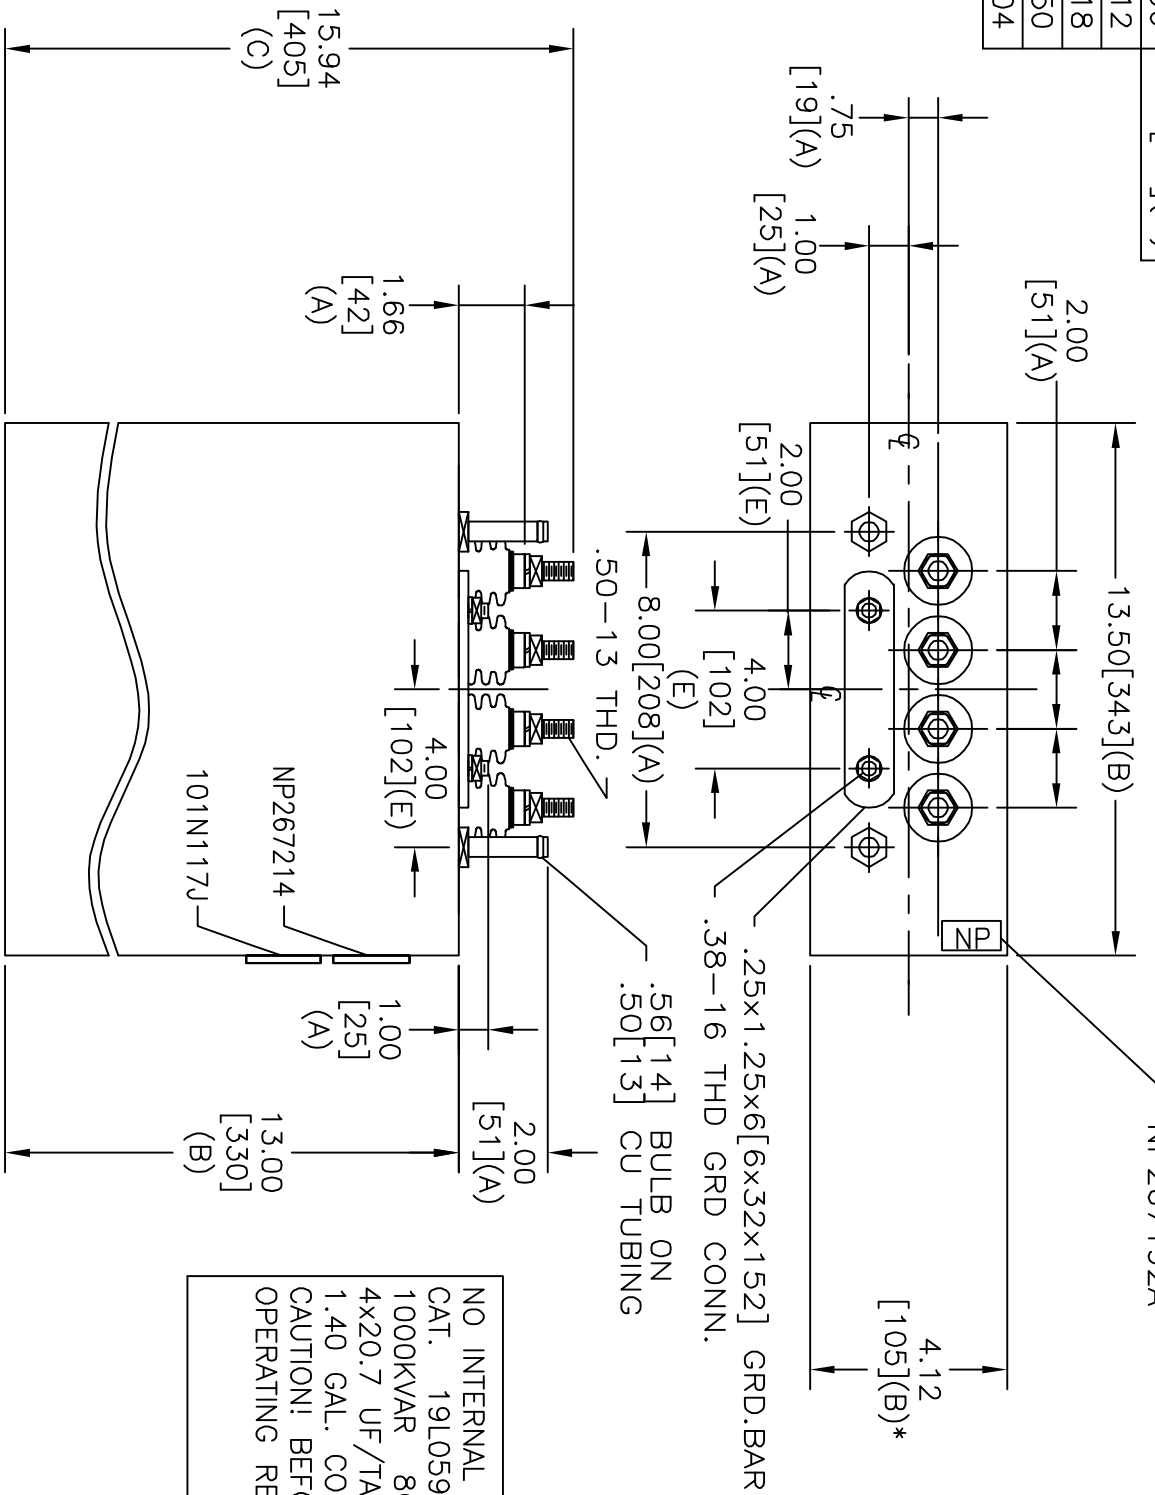

TERM	UF	KVAR
1	20.7	250
2	20.7	250
3	20.7	250
4	20.7	250

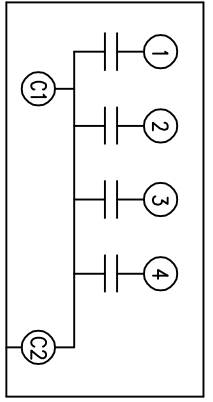

NO INTERNAL DISCH RESISTORS  
 CAT. 19L0591WH1 SN  
 1000KVAR 800V 3000HZ 1PH  
 4x20.7 UF/TAP  
 1.40 GAL. COMBUSTIBLE LIQUID  
 CAUTION! BEFORE INSTALLING OR  
 OPERATING READ GEH-2733

NP267214

\* UP TO +.50[13]  
 CASE BULGE

MAX. TERMINAL  
 TIGHTENING TORQUE  
 15 FT-LBS

NP267192A

SIZE	A	DWG NO	19L0591WH1	SHT	2	REV	2
REV	2	DESCRIPTION	NP WAS 101N149 ON UNIT	DATE	8/3/05	APPROVED	B ROSS



INDUSTRIAL SYSTEMS  
 FORT EDWARD, N.Y., U.S.A.

DRAWN E. McGinn DATE NOV. 20, 1996

ISSUED DATE 11-20-96

SIZE A

OUTLINE

19L0591WH1

SHEET 2 CONT ON