



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

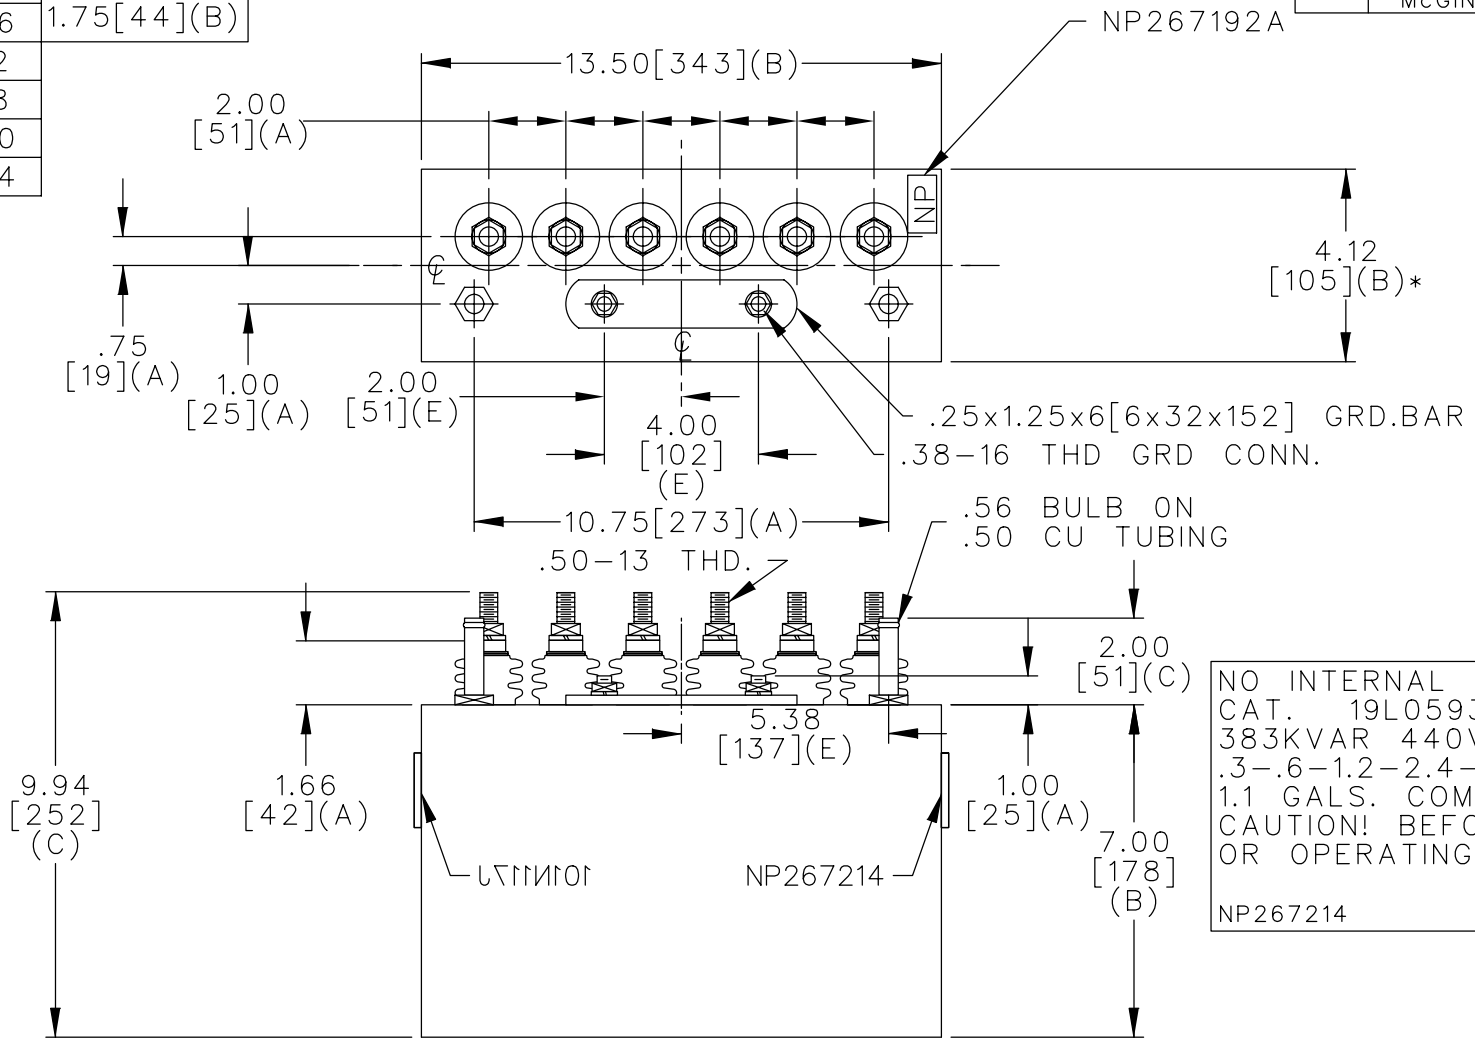

TERM	uF	kVAR
1	.30	10.95
2	.60	21.90
3	1.20	43.79
4	2.40	87.58
5	3.00	109.5
6	3.00	109.5

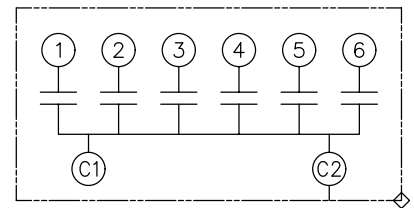

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0593WH1 SN
 383KVAR 440V 30KHZ 1PH
 .3-.6-1.2-2.4-3.0-3.0 UF/TAP
 1.1 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0593WH1	
	DRAWN E.McGINN	JAN. 21, 1998	SCALE		
ISSUED	1-21-98	SHEET 2	CONT. ON -	DISTR TO	