



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

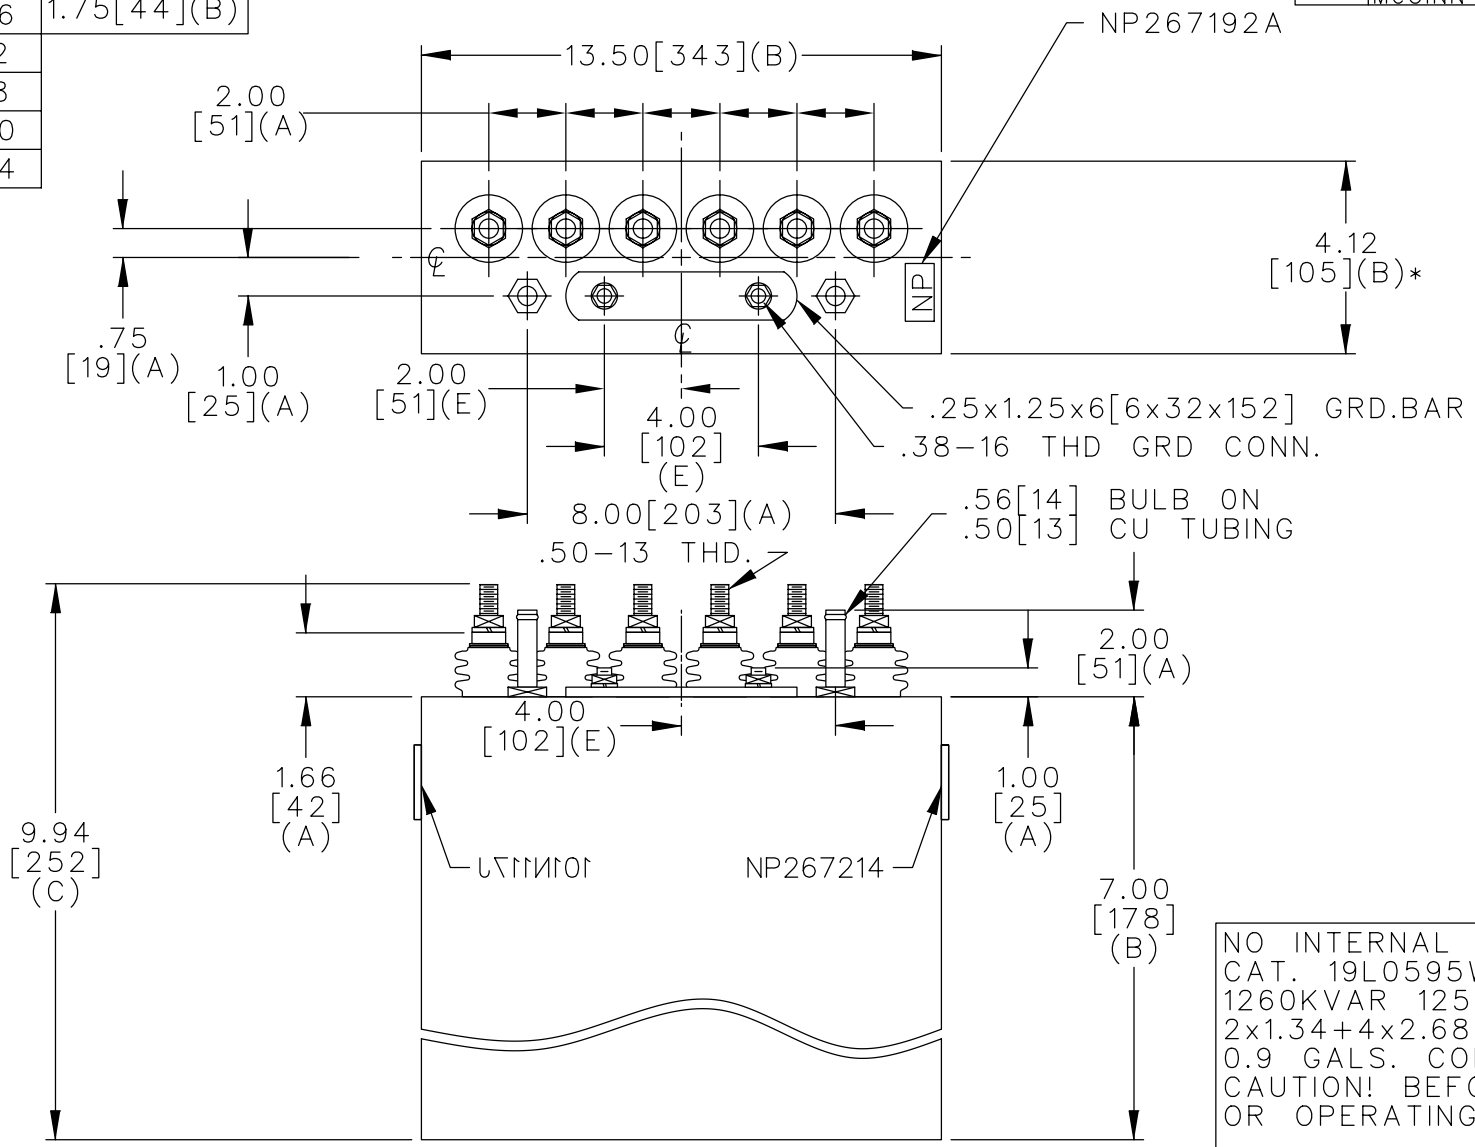

TERM	uF	kVAR
1	1.34	126
2	1.34	126
3	2.68	252
4	2.68	252
5	2.68	252
6	2.68	252

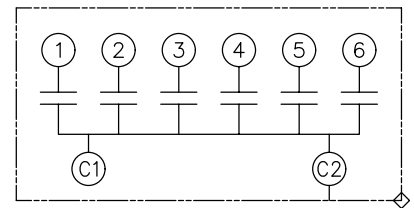

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0595WH1 SN
 1260KVAR 1250VOLTS 9600HZ 1PH
 2x1.34+4x2.68UF/TAP
 0.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2736
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1 style="text-align: center;">OUTLINE</h1> <h2 style="text-align: center;">19L0595WH1</h2>	
	DRAWN E.McGINN	MAY 10, 1999	SCALE		
ISSUED	5-12-99	SHEET 2	CONT. ON -	DISTR TO	