
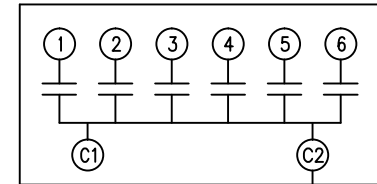


SIZE A	DWG NO 19L0597WH1	SHT 2	REV 4
REV 4	DESCRIPTION CHG FLUID LABEL	DATE 2/5/2014	APPROVED JBC

TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

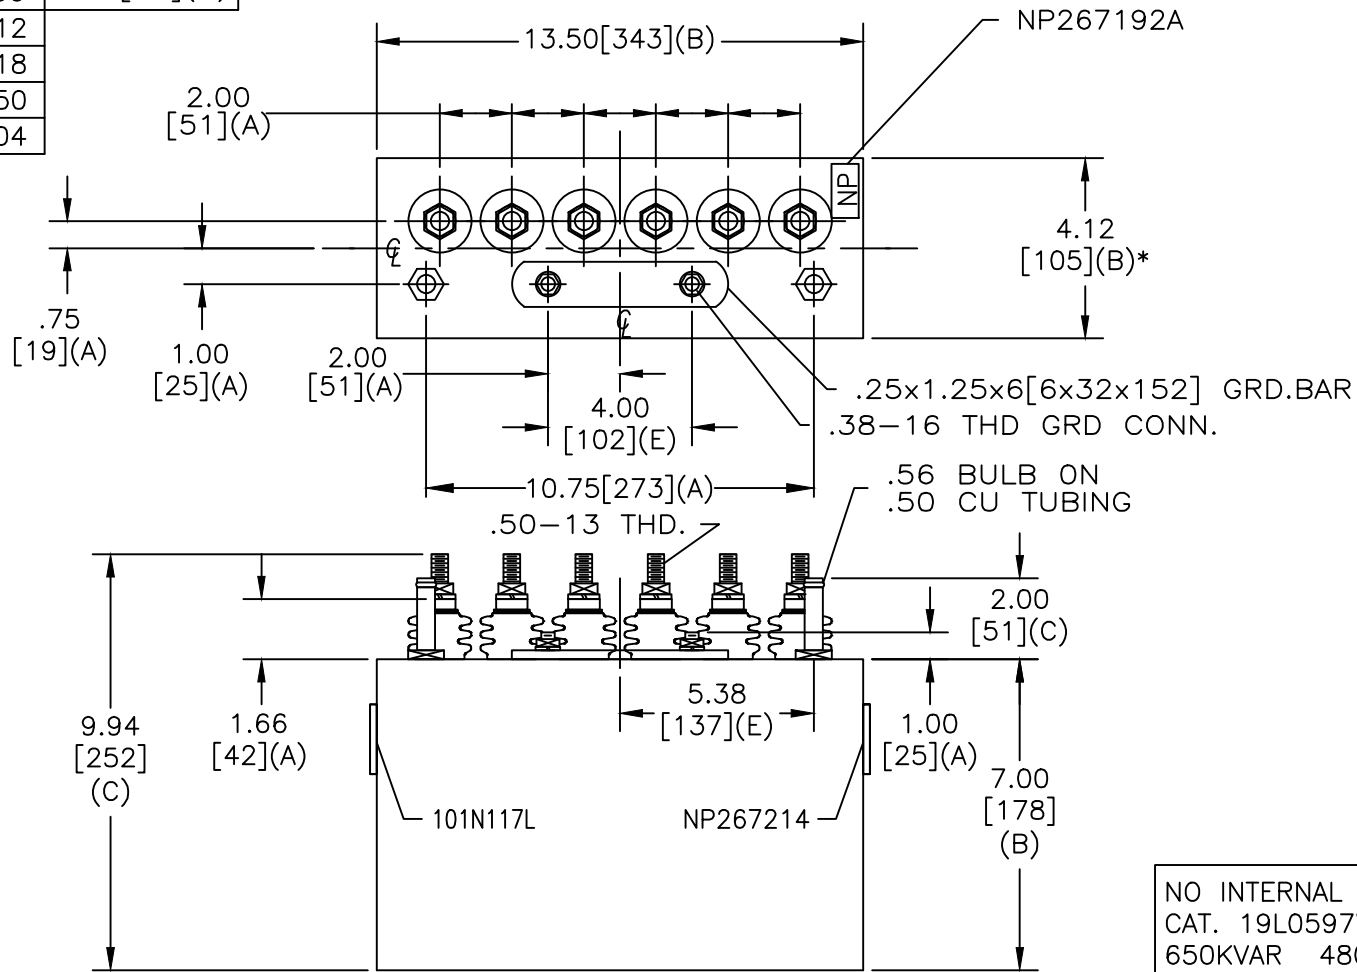

SCHEMATIC DIAGRAM - 601

TERM	uF	kVAR
1	1.50	108.3
2	1.50	108.3
3	1.50	108.3
4	1.50	108.3
5	1.50	108.3
6	1.50	108.3

NO INTERNAL DISCH RESISTORS
 CAT. 19L0597WH1 SN
 650KVAR 480V 50000HZ 1PH
 6x1.5 UF/TAP
 0.9 GAL. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733

NP267214

* UP TO +.50
CASE BULGE

MAX. TERMINAL
TIGHTENING TORQUE
15 FT-LBS

NP267192A

GE ENERGY FORT EDWARD, N.Y., U.S.A.		SIZE A
DRAWN E. McGinn	DATE 11-20-96	SCALE
ISSUED	DATE 11-20-96	

OUTLINE
19L0597WH1

SHEET 2 CONT ON -

DISTR. TO