




TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

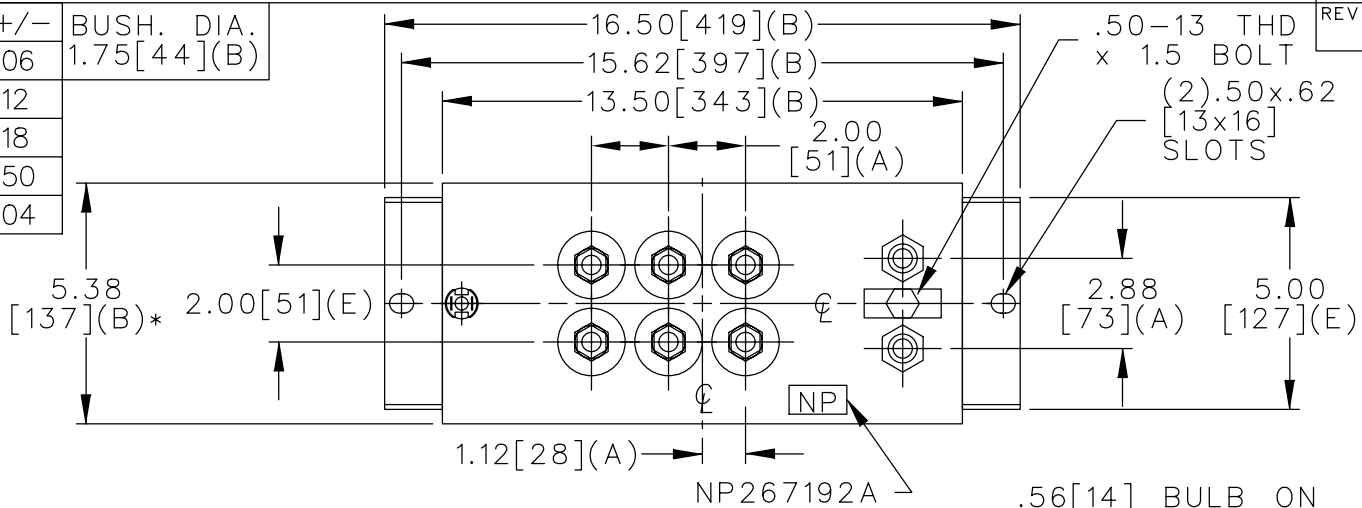

TERM	uF	KVAR
1	5.9	100
2	5.9	100
3	11.8	200
4	11.8	200
5	17.8	300
6	17.8	300

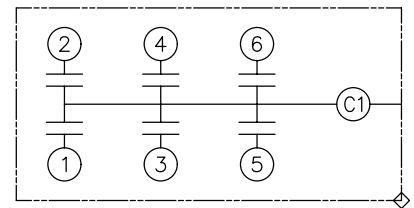

SCHEMATIC DIAGRAM - 606

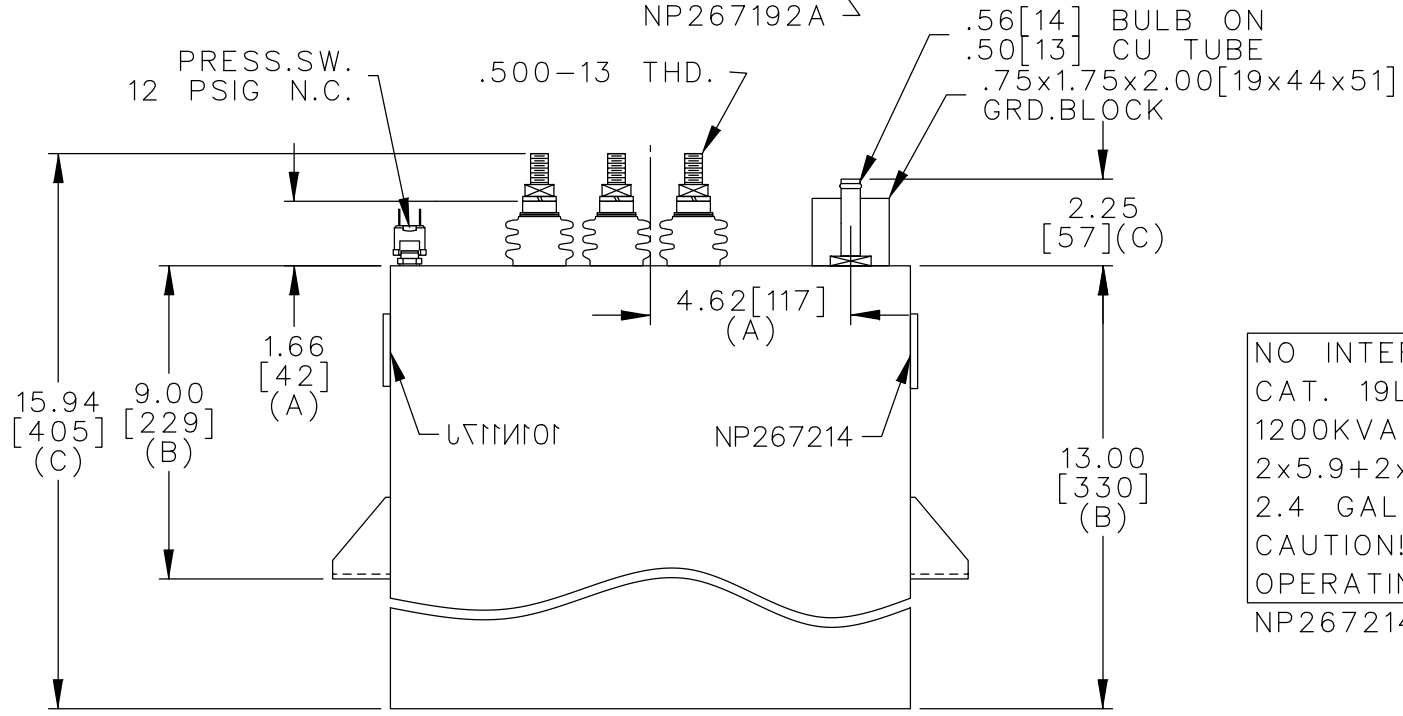

NO INTERNAL DISCH RESISTORS
 CAT. 19L0598WH4 SN
 1200KVAR 1500V 1200HZ 1PH
 2x5.9+2x11.8+2x17.7 UF/TAP
 2.4 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0598WH4	SHEET 2 CONT. ON -
	DRAWN E.McGINN	MAR. 20, 1998	SCALE		
ISSUED	3-25-98		DISTR TO		