



| | | |
|-----|-----|-------------|
| TOL | +/- | BUSH. DIA. |
| A | .06 | 1.75[44](B) |
| B | .12 | |
| C | .18 | |
| D | .50 | |
| E | .04 | |

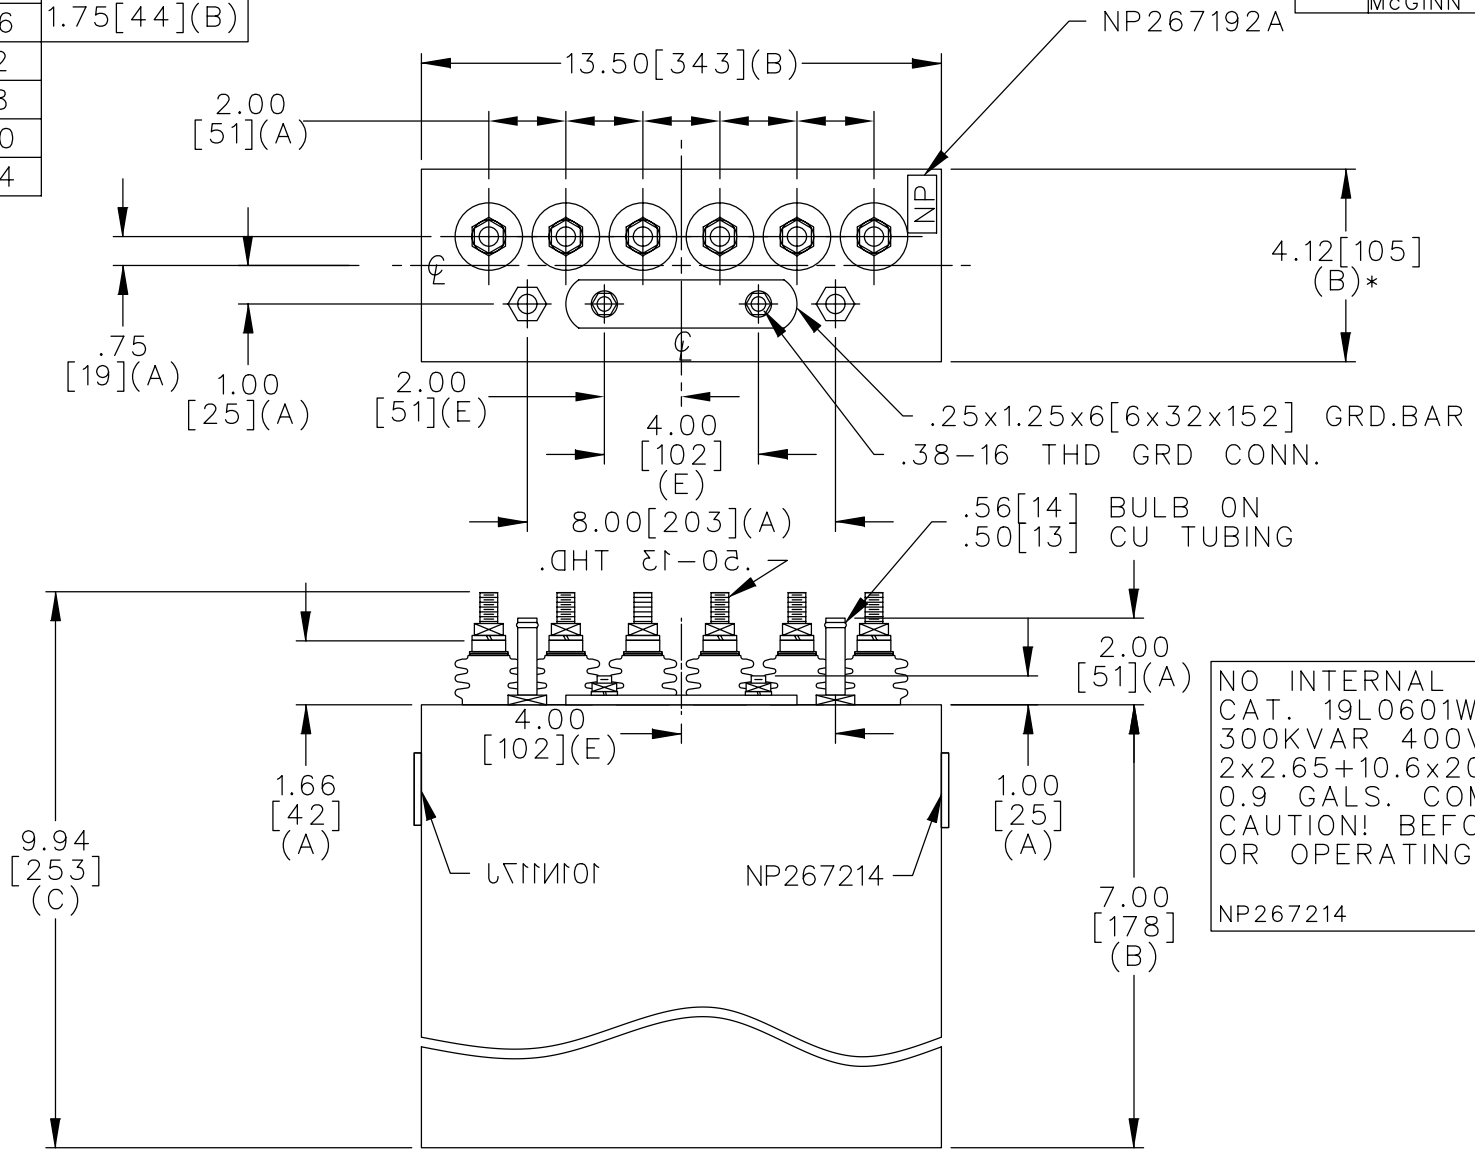

| TERM | uF | kVAR |
|------|-------|------|
| 1 | 2.65 | 8 |
| 2 | 2.65 | 8 |
| 3 | 10.61 | 32 |
| 4 | 20.89 | 63 |
| 5 | 31.33 | 94.5 |
| 6 | 31.33 | 94.5 |

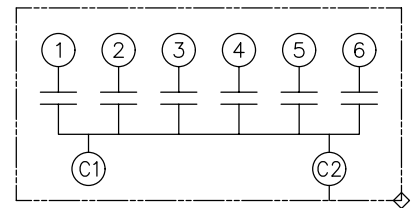

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0601WH1 SN
 300KVAR 400V 3000HZ 1PH
 2x2.65+10.6x20.9+2x31.3 uF/TAP
 0.9 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

| | | | | | | |
|--------|---|--------------|------------------|----------------|-----------------------|--------------------|
| | CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A. | | SIZE A | 24/11 LB/KG | OUTLINE 19L0601WH1 | SHEET 2 CONT. ON - |
| | DRAWN TMO | MAR 25, 1997 | SCALE | DISTR TO | | |
| ISSUED | 3-26-97 | | | | | |