



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

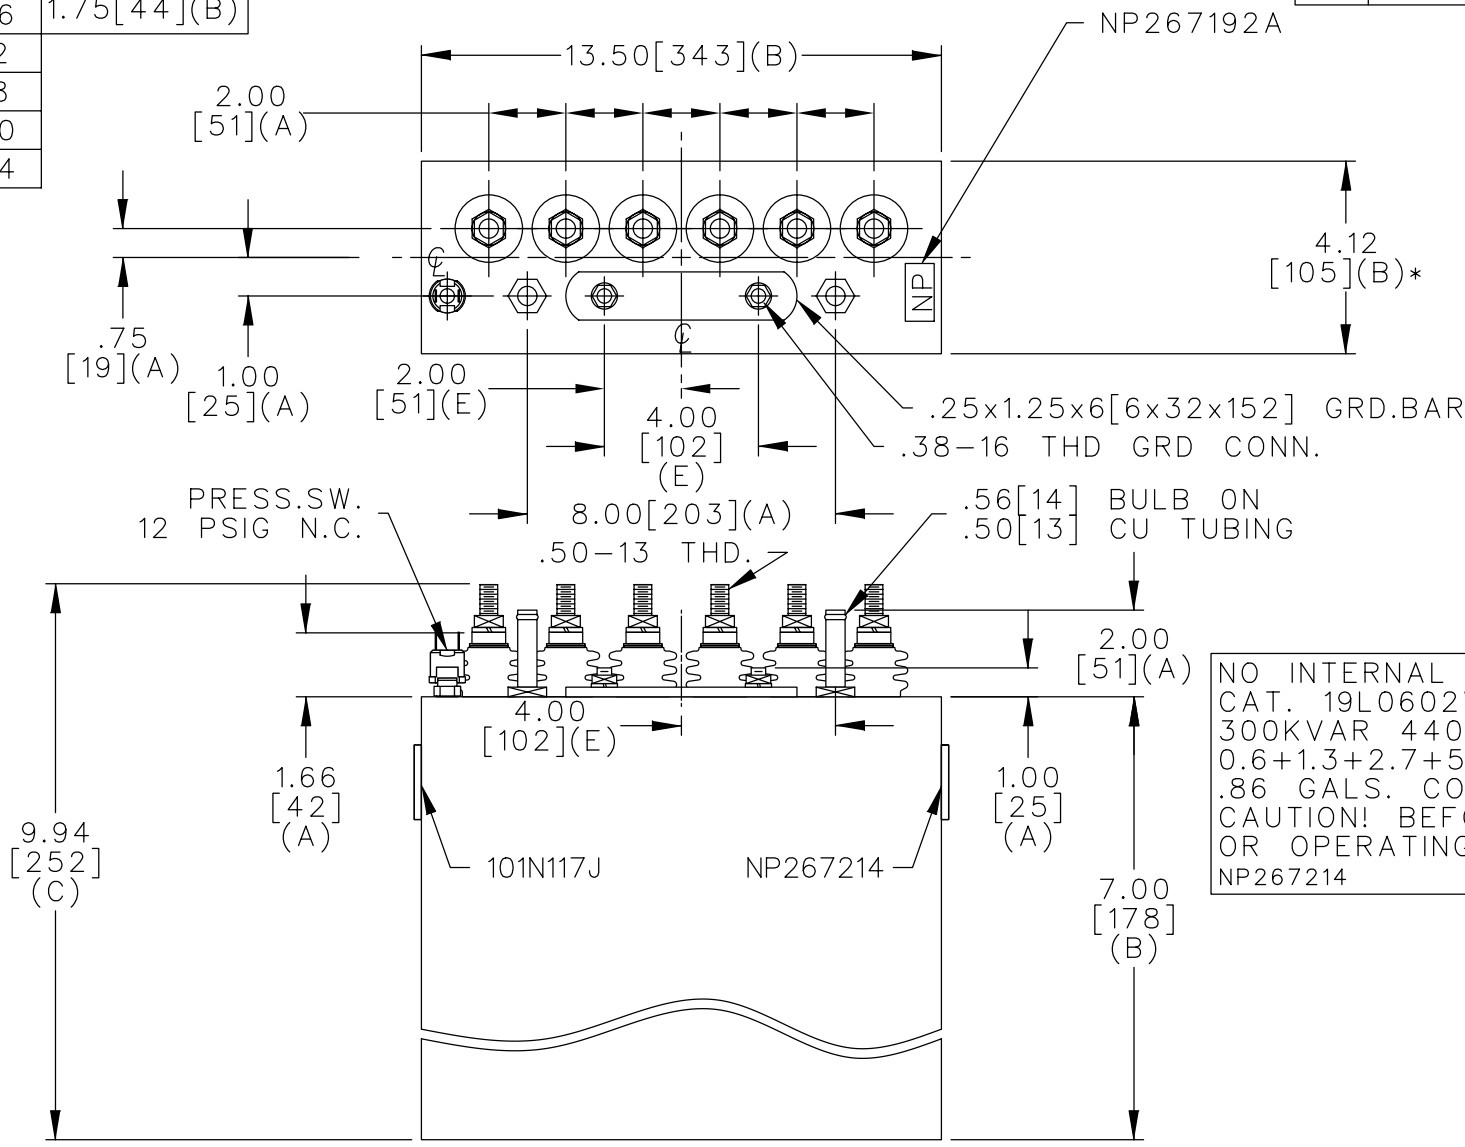

TERM	uF	kVAR
1	0.634	7.4
2	1.28	15.0
3	2.67	31.2
4	5.24	61.2
5	7.93	92.6
6	7.93	92.6

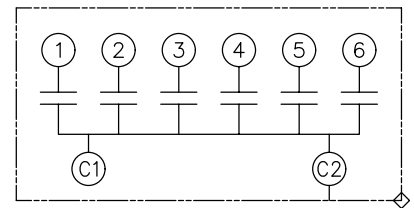

SCHEMATIC DIAGRAM - 601

NO INTERNAL DISCH RESISTORS
 CAT. 19L0602WH2 SN
 300KVAR 440V 9600HZ 1PH
 0.6+1.3+2.7+5.2+2x7.9 UF/TAP
 .86 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING
 OR OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0602WH2	SHEET 2 CONT. ON -
	DRAWN E.McGINN	JAN. 28, 1998			
ISSUED	1-28-98		DISTR TO		