



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

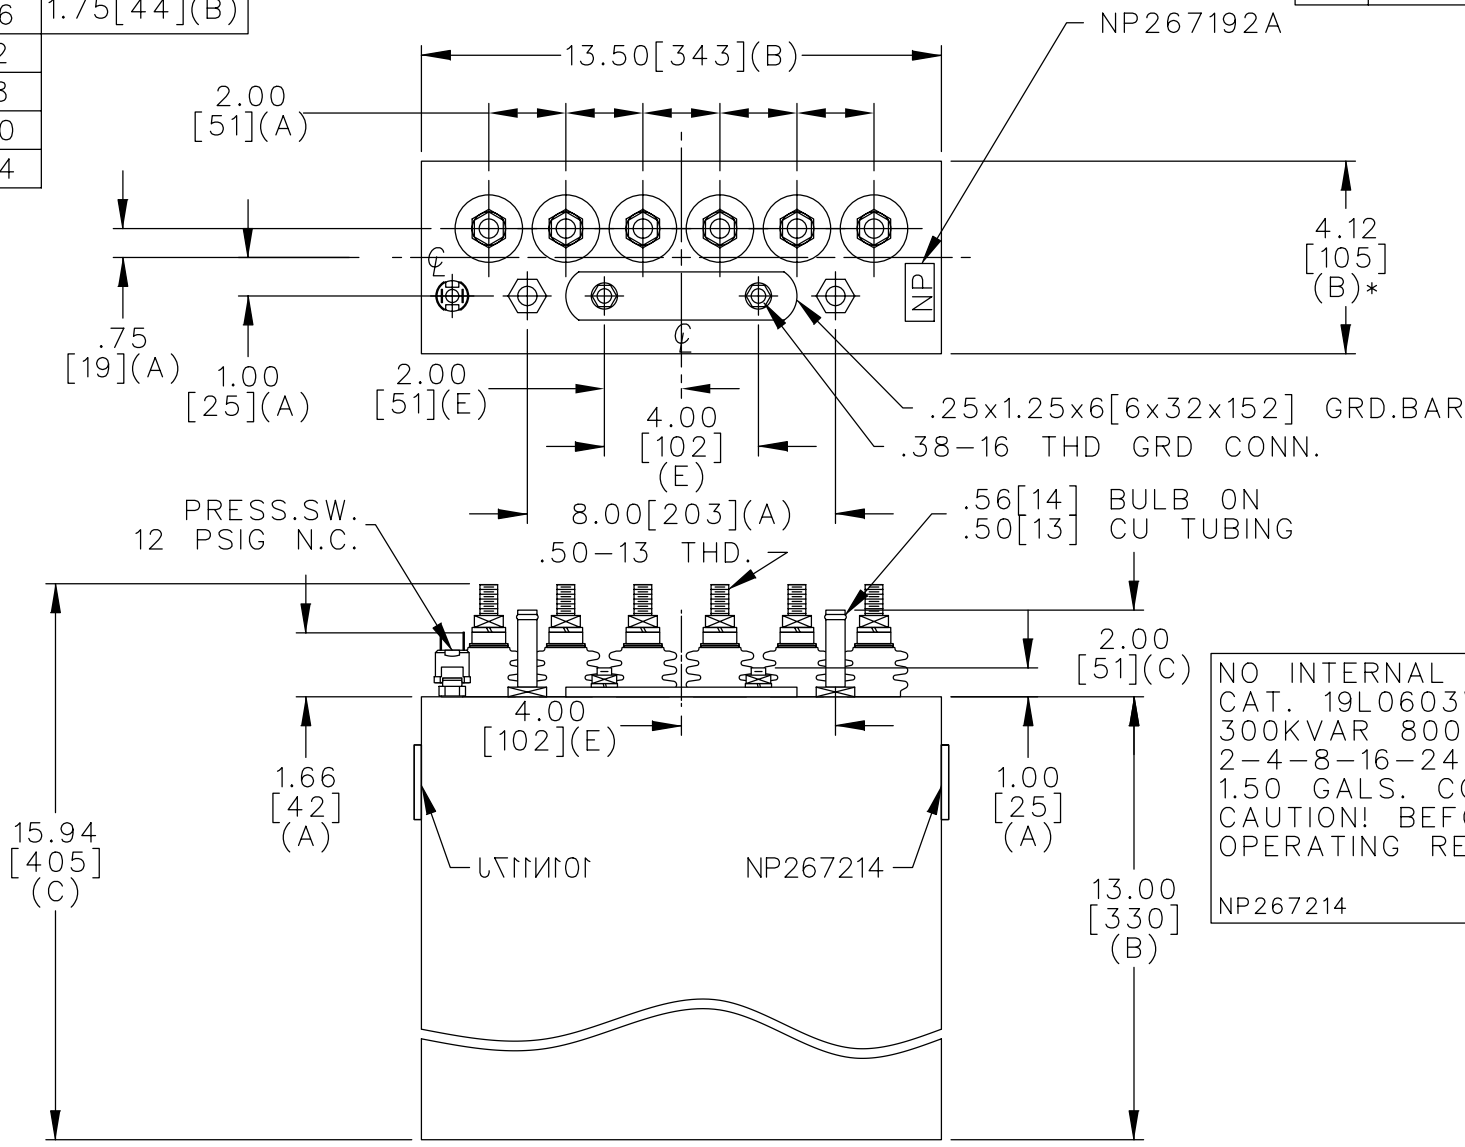

TERM	uF	kVAR
1	2	7.7
2	4	15.4
3	8	30.8
4	16	61.6
5	24	92.4
6	24	92.4

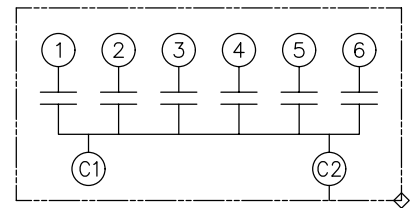

NO INTERNAL DISCH RESISTORS
 CAT. 19L0603WH2 SN
 300KVAR 800V 960HZ 1PH
 2-4-8-16-24-24 UF/TAP
 1.50 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13] CASE BULGE

MAX. TERMINAL TIGHTENING TORQUE 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0603WH2	
	DRAWN B.ROSS	APRIL 17, 2001	SCALE		
ISSUED			SHEET 2	CONT. ON -	DISTR TO