



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

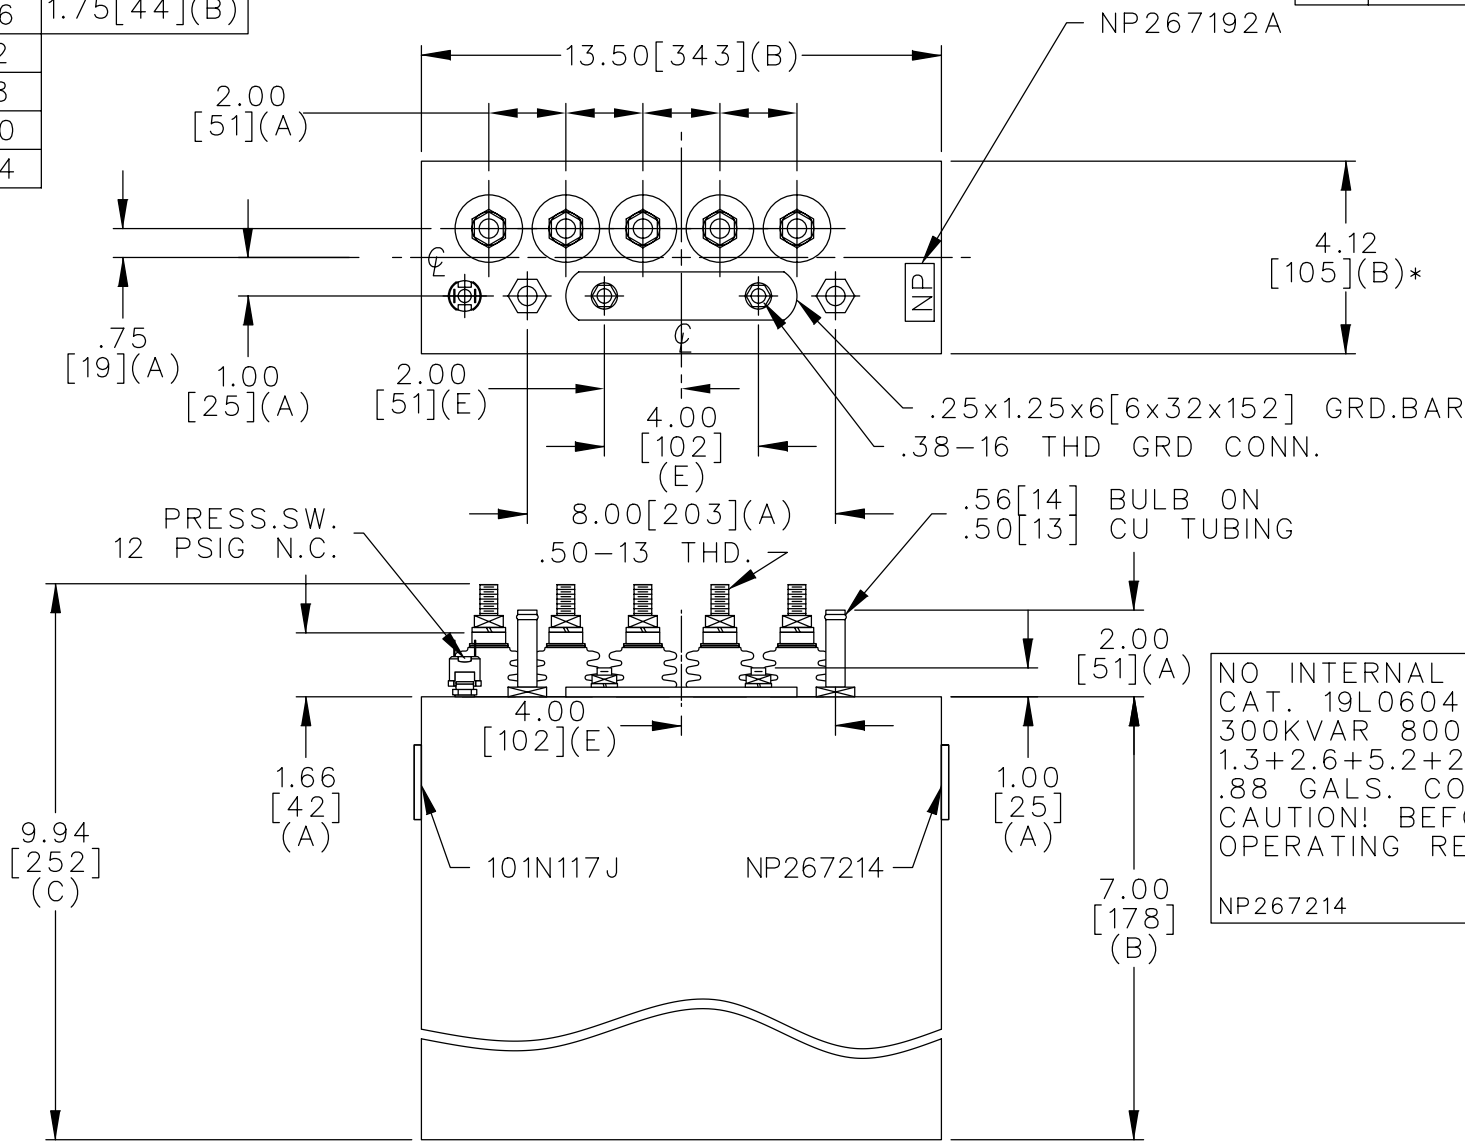

TERM	uF	kVAR
1	1.3	15.79
2	2.6	31.58
3	5.2	63.16
4	7.9	94.74
5	7.9	94.74

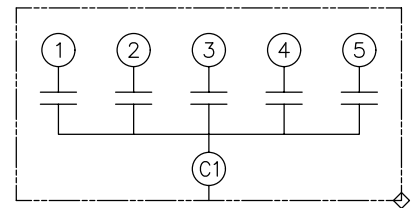

SCHEMATIC DIAGRAM - 501

NO INTERNAL DISCH RESISTORS
 CAT. 19L0604WH2 SN
 300KVAR 800V 3000HZ 1PH
 1.3+2.6+5.2+2x7.9 UF/TAP
 .88 GALS. COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	<h1>OUTLINE</h1> <h2>19L0604WH2</h2>		SHEET 2 CONT. ON
	DRAWN E.McGINN	JUNE 19, 1997	SCALE			
ISSUED						DISTR TO