



TOL	+/-	BUSH. DIA.
A	.06	1.75[44](B)
B	.12	
C	.18	
D	.50	
E	.04	

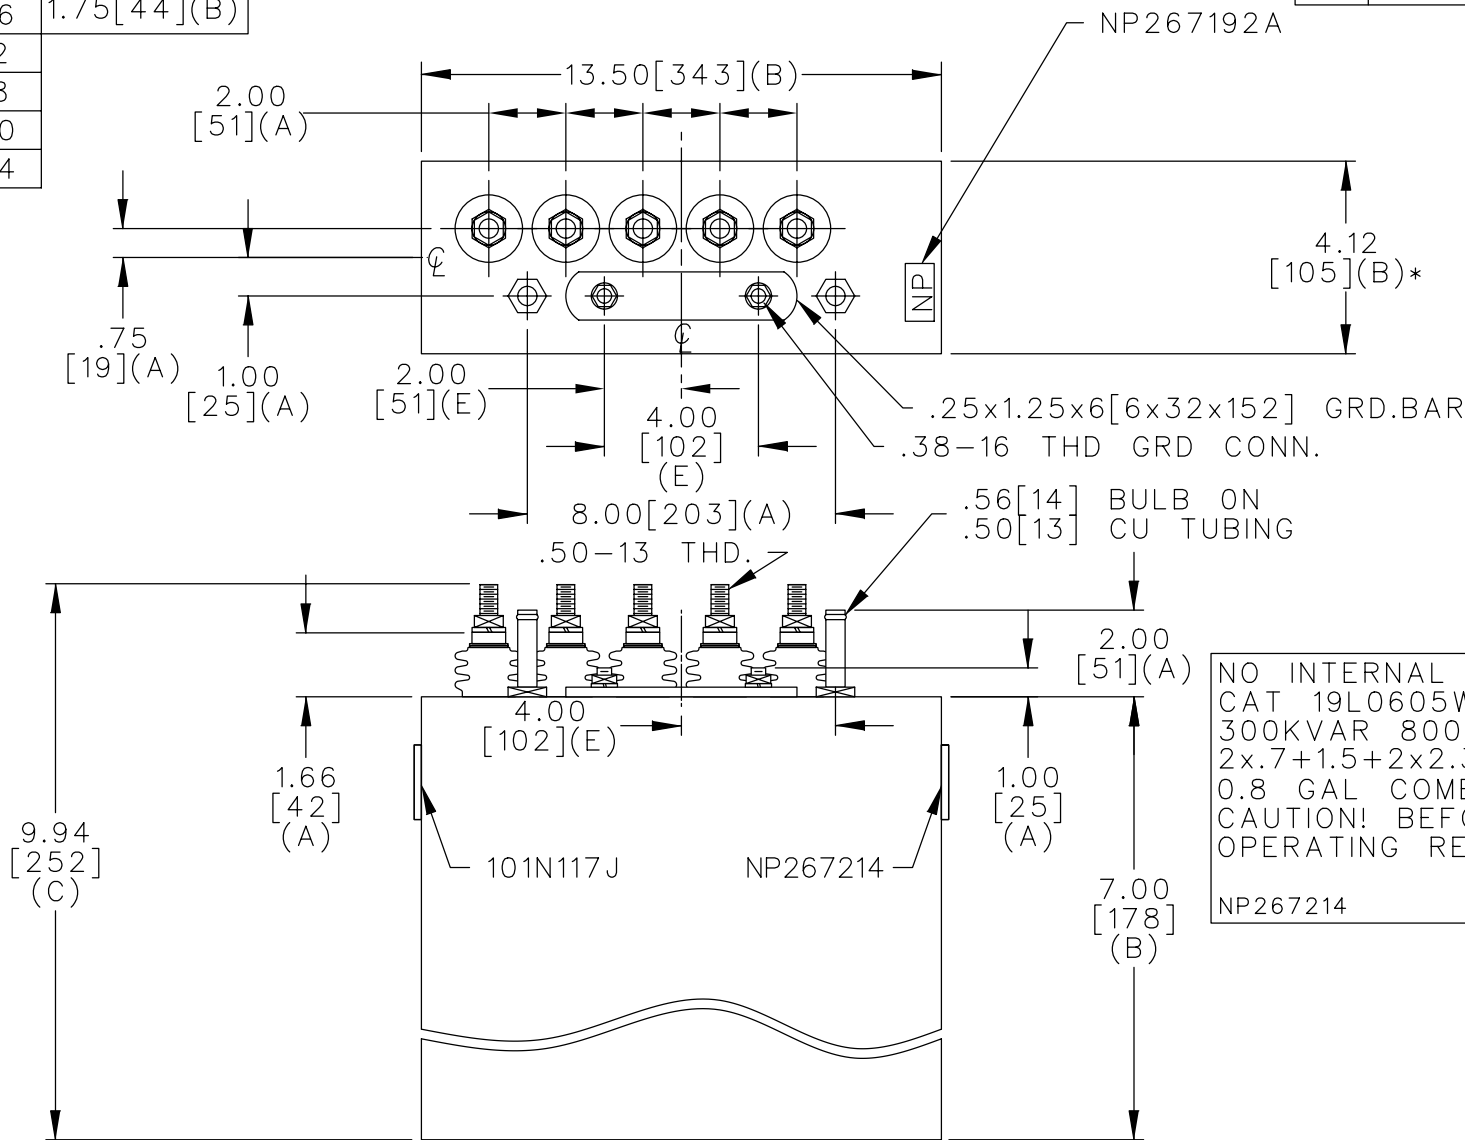

TERM	uF	kVAR
1	0.777	30
2	0.777	30
3	1.544	60
4	2.33	90
5	2.33	90

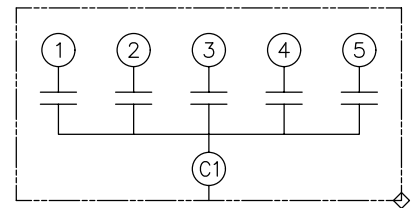

NO INTERNAL DISCH RESISTORS
 CAT 19L0605WH1 SN
 300KVAR 800V 9600HZ 1PH
 2x.7+1.5+2x2.3 UF/TAP
 0.8 GAL COMBUSTIBLE LIQUID
 CAUTION! BEFORE INSTALLING OR
 OPERATING READ GEH-2733
 NP267214

* UP TO +.50[13]
 CASE BULGE

MAX. TERMINAL
 TIGHTENING TORQUE
 15 FT-LBS

NP267192A

	CAPACITOR & POWER PROTECTION FORT EDWARD, N.Y., U.S.A.		SIZE A	OUTLINE 19L0605WH1	SHEET 2 CONT. ON
	DRAWN E.McGINN	OCT. 16, 1997	SCALE		
ISSUED	10-22-97	DISTR TO			